







Participant Handbook











https://eskillindia.org/Home/handbook/757



Skilling India in Electronics

Address: 155, 2nd Floor, ESC House, Okhla Industrial Area,

Phase 3, New Delhi- 110020, India

Web: info@essc-india.org www.essc-india.org hone: +91 8447738501

https://eskillindia.org/Home/handbook/757

Sector **Electronics**

Sub - Sector

Consumer Electronics &IT Hardware

Occupation

After sales service

Reference ID: ELE/Q3105, Version 2.0

NSQF Level 5







Published by

Electronics Sector Skills Council of India (ESSCI)

155, 2nd Floor, ESC House, Okhla Industrial Area, Phase 3, New Delhi - 110020, India

Email: info@essc-india.org Website: www.essc-india.org

Phone: +91 11 46035050, +91 8447738501

All Rights Reserved©2022 First Edition, July 2022

Copyright@2022

Electronics Sector Skills Council of India (ESSCI)

155, 2nd Floor, ESC House, Okhla Industrial Area, Phase 3, New Delhi - 110020, India

Email: info@essc-india.org Website: www.essc-india.org

Phone: +91 11 46035050, +91 8447738501

This book is sponsored by Electronics Sector Skills Council of India (ESSCI)

Under Creative Commons Licence: CC-BY-SA

Attribution-ShareAlike: CC BY-SA



This license lets others remix, tweak, and build upon your work even for commercial purposes, as long as they credit you and license their new creations under the identical terms. This license is often compared to "copyleft" free and open-source software licenses. All new works based on yours will carry the same license, so any derivatives will also allow commercial use. This is the license used by Wikipedia and is recommended for materials that would benefit from incorporating content from Wikipedia and similarly licensed projects.

Disclamer

The information contained here in has been obtained from sources reliable to ESSCI. ESSCI disclaims all warranties to the accuracy, completeness or adequacy of such information. ESSCI shall have no liability for errors, omissions, or inadequacies, in the information contained herein, or for interpretations thereof. Every effort has been made to trace the owners of the copyright material included in the book. The publishers would be grateful for any omissions brought to their notice for acknowledgements in future editions of the book. No entity in ESSCI shall be responsible for any loss whatsoever, sustained by any person who relies on this material. The material in this publication is copyrighted. No parts of this publication may be reproduced, stored or distributed in any form or by any means either on paper or electronic media, unless authorized by the ESSCI.





Skilling is building a better India.

If we have to move India towards development then Skill Development should be our mission.

Shri Narendra Modi Prime Minister of India







Certificate

COMPLIANCE TO QUALIFICATION PACK – NATIONAL OCCUPATIONAL STANDARDS

is hereby issued by the

ELECTRONICS SECTOR SKILLS COUNCIL OF INDIA

for

SKILLING CONTENT: PARTICIPANT HANDBOOK

Complying to National Occupational Standards of

Job Role/Qualification Pack ____*Field Engineer RACW" QP No."ELE/Q3105, NSQF Level 5"

Date of Issuance: 27.01.2022 Valid up to*: 02.06.2025

*Valid up to the next review date of the Qualification Pack or the 'Valid up to' date mentioned above (whichever is earlier) Authorized Signatory Electronics Sector Skills Council of India

Acknowledgements

The need for having a standard curriculum for the Job Role based Qualification Packs under the National Skills Qualification Framework was felt necessary for achieving a uniform skill based training manual in the form of a participant handbook.

I would like to take the opportunity to thank everyone who contributed in developing this handbook for the QP Field Technician – RACW.

The handbook is the result of tireless pursuit to develop an effective tool for imparting the Skill Based training in the most effective manner.

I would like to thank the team for their support to develop the content, the SME and the team at the ESSCI along with the industry partners for the tireless effort in bringing the handbook in the current format.

CEO

Electronics Sector Skills Council of India

About this Book

This Participant Handbook is designed to enable training for the specific Qualification Pack (QP). Each National Occupational (NOS) is covered across Unit/s.

Key Learning Objectives for the specific NOS mark the beginning of the Unit/s for that NOS.

- Define matter, its states and change in states
- Explain properties of heat
- Explain types of heat transfer and energy conservation
- Explain the working of refrigerators
- Describe electric circuits
- Describe voltage, current and resistance
- Define Ohm's law
- List the different types of tools used for installing appliances
- Identify the correct methods of using tools
- Explain the working of DC refrigerator
- Explain the working of FF refrigerator
- Install DC and FF refrigerators
- Define the factors, comfort zone and heat load of ACs
- Identify the different parts and working of Window ACs
- Follow safety precautions for installation of Window ACs
- Identify the different types of washing machines
- Describe the basic functions of washing machines
- Identify the different parts of washing machines
- Install semi-automatic washing machines
- Understand customer requirements
- Interact with customers
- Suggest resolution to the problems of customers

The symbols used in this book are described below.

Symbols Used —



Key Learning Outcomes



Steps



Role Play



Tips



Notes



Unit Objectives



Activity

Table of Contents

S. No	Modules and Units	Page No.
1.	Introduction to Refrigeration, Air Conditioner and Washing Machine (RACW) (ELE/N3101, ELE/N3115, ELE/N3116, ELE/N3117)	1
	Unit 1.1 – Basics Science Related to RACW	3
	Unit 1.2 – Basics of Refrigerator	9
	Unit 1.3 – Basics of Air Conditioner	15
	Unit 1.5 – Basics of Washing Machine	19
	Unit 1.6 – Electronic waste (e-waste) Management	22
2.	Basics of Electricity and Electronics (ELE/N3101, ELE/N3112, ELE/N3113, ELE/N3114)	25
	Unit 2.1 – Basics of Electric Circuit	27
	Unit 2.2 – Components of Electric Circuits	33
	Unit 2.3 – Inverter Technology	43
	Unit 2.4 – Units of Measurement in RACW	47
3.	Tools and Equipment Handling (ELE/N3112, ELE/N3113, ELE/N3114)	49
	Unit 3.1 – Identify the Use of Tools and Equipment	51
	Unit 3.2 – Safety and Maintenance of Tools	58
4.	Refrigeration (ELE/N3112, ELE/N3113, ELE/N3114, ELE/N3117	61
	Unit 4.1 – Uses of Refrigeration and Refrigeration Cycle	63
	Unit 4.2 – Basics Components of Refrigerators	66
	Unit 4.3 – Refrigerants	69
	Unit 4.4 – Need and Type of Refrigerators	79
	Unit 4.5 – Safety Precautions, Policies nad Procedures	85
	Unit 4.6 – DC Refrigerators	89
	Unit 4.7 – FF Refrigerators	95
	Unit 4.8 – Installing DC and FF Refrigerators	100
	Unit 4.9 – Repairing DC and FF Refrigerators	107
	Unit 4.10 – Sealed Systems	114
	Unit 4.11 – Copper Wire Processing	127
5.	Air Conditioner (ELE/N3114)	135
	Unit 5.1 – Basic Concepts of Air Conditioner (ACs)	137
	Unit 5.2 – Working and Installation of Windows ACs	141
	Unit 5.3 – Servicing Windows ACs	147
	Unit 5.4 – Installing Split ACs	155
	Unit 5.5 – Servicing Split ACs	168

6.	Washing Machines (ELE/N3116, ELE/N3117)	175
	Unit 6.1 – Functions and Parts of Washing Machine	177
	Unit 6.2 – Installing Washing Machines	186
	Unit 6.3 – Servicing and Repairing Washing Machines	193
	Unit 6.4 – Troubleshooting Common Problems	199
7.	Soft Skills and Work Ethics (ELE/N9905)	203
	Unit 7.1 – Effective Communication and Coordination at Work	205
	Unit 7.2 – Working Effectively and Maintaining Discipline at Work	212
	Unit 7.3 – Maintaining Social Diversity at Work	223
8.	Basic Health and Safety Practices (ELE/N1002)	231
	Unit 8.1 – Workplace Hazards	233
	Unit 8.2 – Fire Safety	245
	Unit 8.3 – First Aid	249
	Unit 8.4 – Waste Management	253











1. Introduction to Refrigerator, Air Conditioner and Washing Machine (RACW)


Unit 1.1 - Basic Science Related to RACW

Unit 1.2 - Basics of Refrigerators

Unit 1.3 - Basics of Air Conditioners

Unit 1.4 – Basics of Washing Machines

Unit 1.5 – Electronic Waste (e-waste) Management

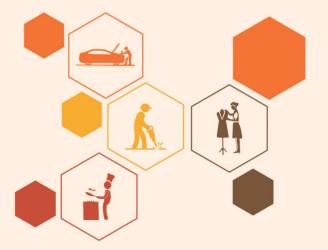

Key Learning Outcomes



At the end of this module, you will be able to:

- 1. Define matter, its states and change in states
- 2. Explain properties of heat
- 3. Explain types of heat transfer and energy conservation
- 4. Explain the working of refrigerators
- 5. Explain the refrigeration cycle
- 6. Explain the working of air conditioners
- 7. Identify the AC comfort zone factors
- 8. Identify the types of AC and basic differences between them
- 9. Explain the working of washing machines
- 10. Explain the role of a field engineer for RACW
- 11. Explain about e-waste and e-waste management

UNIT 1.1: Basic Science Related to RACW

Unit Objectives



At the end of this unit, you will be able to:

- 1. Define matter, its states and change in states
- 2. Explain properties of heat and types of heat, to show the conversion of temperature from one scale to other
- 3. Explain types of heat transfer and energy conservation

1.1.1 Matter and its States -

The basic working of refrigeration and air conditioning (RAC) involves changes in states of liquids and gases over different temperature ranges. Therefore, to understand the concept of RAC, first it is important to understand the basics of matter, its states and changes in its states.

Matter is defined as anything that occupies space, has length, width, height and mass. The following image shows the definition of matter as explained in the preceding statement:

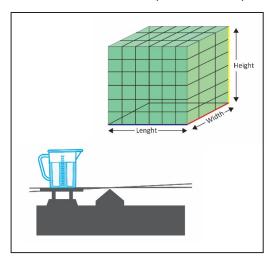


Fig 1.1.1: Definition of matter

Typically, matter is classified into three states as shown in the following figure:


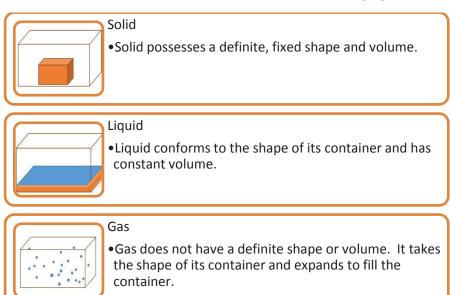


Fig. 1.1.2: States of matter

Change in States

When a state of matter is subjected to any kind of pressure or temperature change, the structure of matter and its property, change from one state to another. For example, water below zero degrees Celsius is in ice form which is solid and above 100 degrees Celsius is in steam form which is gaseous state.

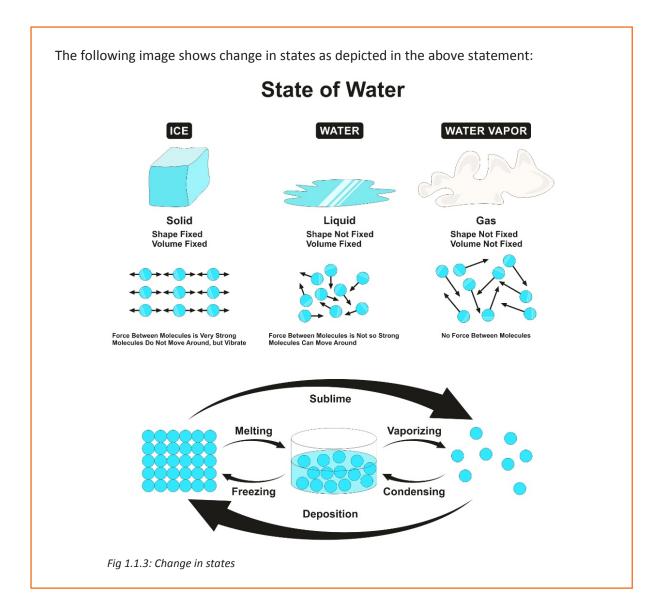

The following figure defines the process of change in states based on temperature changes:

Melting

•The process in which there is a change in the state of a substance from solid to liquid, due to increase in temperature on application of heat or pressure, is known as melting.

Freezing

•The process in which there is a change in the state of a substance from liquid to solid, below the freezing temperature of the substance, is known as freezing.

Vaporisation

• The process in which there is a change in the state of a substance from liquid to gaseous (vapour), at temperatures below the boiling temperature at certain pressure, is known as vapourisation.

Condensation

• The process in which there is a change in the state of a substance from gaseous form to liquid form is known as condensation.

Sublimation

• The process in which there is a change in the state of a substance directly from solid form to gaseous form, without becoming a liquid, is known as sublimation.

Deposition

•The process in which there is a change in the state of a substance directly from gaseous form into solid form is known as deposition.

Fig. 1.1.4: Basic terms in change of states of matter

1.1.2 Heat and Transfer of Heat

Heat can be defined as a form of energy which is transmitted from a hotter object to a cooler one, as shown in the following image:



Fig. 1.1.5: Heat transfer

Temperature can be measured in terms of temperature using a thermometer. It is a measure of amount of heat (whether a substance is hot or cold). It is measured by a device known as thermometer. For measuring temperature, there are several scales and units. Most commonly used scales are the Celsius scale (denoted by °C), the Fahrenheit scale (denoted by °F) and the Kelvin scale (denoted by K).

Temperature Conversion

To convert temperature from one scale to another there are some basic standard formulae which are as shown in the following figure:

Fahrenheit scale to Celsius scale:

$$T(^{\circ}C) = (T(^{\circ}F) - 32) \times 5/9$$

Kelvin scale to Celsius scale:

$$T (^{\circ}C) = T(K) - 273.15$$

Fig. 1.1.6: Basic standard formulae

Types of Heat

Heat can be classified into different types. The following figure shows the different types of heat:

Sensible heat

•It is the form of heat energy, which is commonly sensed by touch or measured directly with a thermometer.

Latent heat

•It is the form of heat energy, which cannot be sensed by touch or measured using a thermometer. It causes an object to change its phase.

Specific heat

•It is the ratio of the quantity of heat needed to increase the temperature of unit mass of a substance by one degree to the quantity of heat needed to increase the temperature of same mass of water by the same amount

Fig. 1.1.7: Types of heat

Latent heat which is involved while melting a solid or while freezing a liquid is known as the latent heat of fusion. Latent heat which is involved while vaporizing a liquid/solid or condensing a vapour is known as the latent heat of vaporization.

The unit for latent heat is joules or calories.

For example:

- When water is continuously boiling, the temperature stays at 100 °C until the entire amount of water evaporates. This happens because all the heat is transmitted to the liquid as latent heat of vaporization and is taken away by the vapour.
- When ice melts, the temperature stays at zero degrees C. The temperature of liquid water that results due to the latent heat of fusion is also zero degrees C.

Heat of vaporisation in a substance is in a very large amount. Hence, steam carries immense thermal energy that is released on its condensation. This quality makes water a suitable and desirable working fluid for heat engines.

Types of Heat Transfer

Heat transfer occurs in three ways, as shown in the following figure:

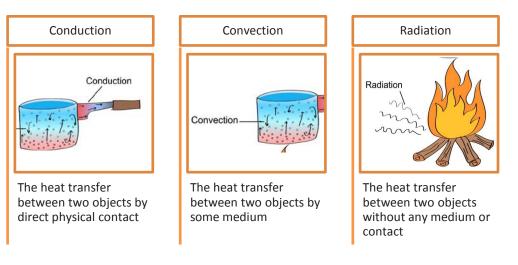


Fig.1.1.7: Types of heat transfer

1.1.3 Energy Conversion

The law of conservation of energy states that energy can be transformed from one form to another, but it cannot be created or destroyed. Energy is the capacity to perform any kind of action such as lifting or heating of an object.

Energy is used to provide heating, refrigeration, lighting or performing mechanical work.

UNIT 1.2: Basics of Refrigerators

Unit Objectives



At the end of this unit, you will be able to:

- 1. Identify the need for refrigerators
- 2. Explain the working of refrigerators and basic components
- 3. Explain the refrigeration cycle



1.2.1 Refrigerator –

A refrigerator is used to cool substances to a temperature below the temperature of the surrounding environment to preserve substances.

Refrigeration is a process of transferring the temperature from low to high temperature reservoir by removing heat which cools the substances inside the refrigerator. The following image shows a refrigerator

Typical refrigeration cycle

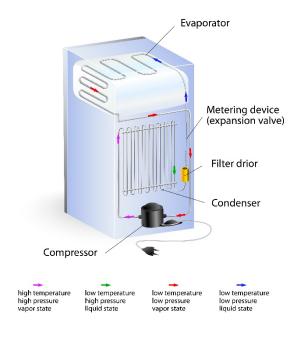


Fig. 1.2.1: A refrigerator

The basic principle of refrigeration is passing a liquid at low temperature continuously around an object which needs to be cooled, by taking the heat away from the object.

In refrigeration, the low temperature reduces the reproduction of bacteria and other microorganisms to reduce the spoilage rate. The temperature range for food storage is around three to five-degree C.

The technology utilizes a compartment that is thermally insulated and a heat pump which conveys the heat from the interior of the fridge to the exterior environment. It has four main components—compressor, condenser, capillary tube and evaporator.

1.2.2 Refrigeration Cycle

In the refrigeration cycle, the refrigerant liquid flows through the compressor to the condenser where the condenser fan liquefies the refrigerant. The drier then collects the refrigerant fluid and sends it to the evaporator. In the evaporator, the fluid then transfers the cooled fluid to the substance in the chamber. This continues through the suction and discharge line between the components to complete the refrigeration cycle. The following image shows a refrigeration cycle:

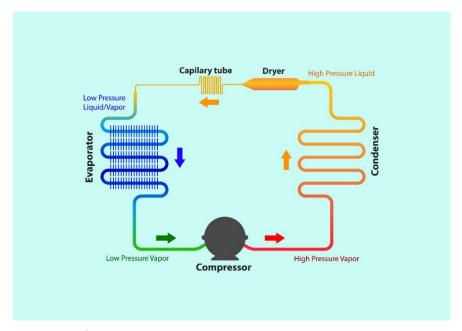


Fig. 1.2.2: A refrigeration cycle

1.2.3 Basic Components in a Refrigeration Cycle

The basic components in a refrigeration cycle are:

- Compressor
- Condenser
- Capillary Tube
- Evaporator



Condensor

Capillary Tube

Evaporator

The following figure shows the basic components of a refrigeration cycle:

Fig. 1.2.3: Components of a refrigeration cycle

Compressor

The function of a compressor is to receive the refrigerant from the evaporator through a suction valve which is at low pressure and send it to the condenser through an exhaust valve which is at high pressure and temperature.

A compressor is utilized to increase the pressure of the refrigerant. The following image depicts a compressor:



Fig. 1.2.4: A compressor

Types of Compressors:

The following image shows different types of compressors:



Reciprocating Compressor



Rotary Compressor



Scroll type Compressor

Fig. 1.2.5: Types of Compressors

In household refrigerators, reciprocating type of compressor is used.

Working of a reciprocating compressor:

The following figure shows the steps of a reciprocating compressor:

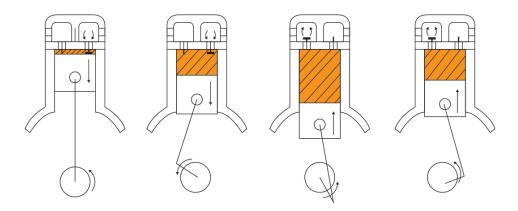


Fig. 1.2.6: Steps of a reciprocating compressor

Condenser

The condenser is also known as the heat exchange coil. The refrigerator is equipped with a condenser on the outside because the refrigerant temperature is more than the atmospheric temperature. So, the vapour is condensed to liquid state to get it at normal temperature.

The input of the condenser is the refrigerant from the compressor. This refrigerant is a vapour at a high pressure and a high temperature. The output of the condenser is the refrigerant at high-pressure and in a liquid form.

The following image shows types of condensers used in refrigerators:





Skin condenser

Wire mesh condenser

Fig. 1.2.7: Types of condensers

Capillary Tubes

Capillary tubes are used as an expansion valve which restricts the flow of liquid to reduce the pressure. These tubes are about 2 m in length and have an inside diameter of 0.6 mm which allows considerable resistance to the flow. This causes a sudden drop in pressure and temperature.

The high-pressure refrigerant in the liquid form from the condenser is the input of the capillary tubes and a low pressure refrigerant in the liquid form to the evaporator is its output.

The following image shows a capillary tube:



Fig. 1.2.8: A capillary tube

Evaporator

Evaporator is used as a heat exchanger which carries the cold refrigerant over a body and the refrigerant absorbs the heat. The liquid refrigerant expands in the evaporator.

The low-pressure refrigerant in the liquid form from the capillary tube is the input of the evaporator and a low-pressure refrigerant in the vapour form to the compressor is its output.


The following image shows an evaporator:



Fig. 1.2.9: An evaporator

The following image shows different types of evaporators:







Roll bond evaporator



Tube plate evaporator

Fig. 1.2.10: Types of evaporators

UNIT 1.3: Basics of Air Conditioners

Unit Objectives



At the end of this unit, you will be able to:

- 1. Explain the working of air conditioners (AC)
- 2. Identify the AC comfort zone factors
- 3. Identify the types of AC and basic differences between them

1.3.1 Air Conditioner -

Air conditioners (AC) are used to attain a comfortable environment by cooling or dehumidifying rooms or any closed environment. As per the requirements of an individual, there are different types of ACs used in different conditions. The capacity of the AC is measured in tons.

There are some basic requirements for a comfort zone created by an AC.

- Fresh air supply with supply of oxygen and removal of carbon-dioxide.
- Heat removal and moisture removal.
- Sufficient air movement and air distribution in the space.
- Removing odour and dust.

Air conditioning controls the following three attributes of atmosphere in a closed environment:

Parameters	Winter	Summer	
Temperature	230C~250C	190C~210C	
Relative Humidity	50%~60%	35%~40%	
Air movement	4.5~7.5	Air movement	

Fig 1.3.1: Three attributes of atmosphere

Any heat generated from the space to the air conditioner is called "Load".

Heat load depends on:

- Dimensions of the room
- Electrical equipment in the room
- Type of room
- Incident heat from wall/ceiling/door/windows
- Number of human beings
- Work performed by a human body

For the calculation of AC load comfort zone there are some basic parameters that need to be maintained by the AC. The following image shows the AC load calculation factors:

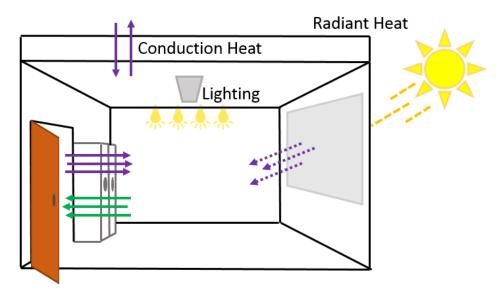


Fig. 1.3.2: AC load calculation factors

Working of Air Conditioners

Air conditioner uses a fan which distributes the conditioned air to help maintain a thermally comfortable and improved air quality environment. The AC works on the principle of refrigeration cycle.

1.3.2 Types of AC -

There are different types of ACs available and the AC system used depends upon factors such as the dimension of the area which needs to be cooled, heat generated in the area and so on. So, it is on the technician to calculate and understand the load capacity and select an AC system appropriate for the area.

Window AC

Window AC is a unitary air conditioning system which is most commonly used for a medium sized single room. In this type of AC all the basic components of an AC system like condenser, compressor, evaporator, cooling coil etc. are installed in a single compartment. As the name suggests, this type of AC can be installed or fitted in a window slot provided in a room's wall.

The following image shows a window AC:



Fig. 1.3.3: A window AC

Split or Ductless AC

Split or ductless AC is a split AC system which is used in hotels and apartments. They are made up of an indoor and an outdoor unit. The indoor unit contains the evaporator and the cooling fan and the outdoor unit contains the compressor, expansion valve and a condenser. This type of AC gives convenience where there is no slot present in the room or the wall. These types of ACs take more space than window AC. The following image shows a split AC:



Fig. 1.3.4: A split or ductless AC

Portable AC

Portable AC is a unitary type AC system. It is an AC system which can be placed anywhere on the floor of a room. It uses a hose vent to discharge the exhaust heat through the exterior wall of the room. The following image shows a portable AC:



Fig. 1.3.5: A portable AC

Central Air Conditioning

Central AC system is used in large areas such as halls, factories, hotels and big spaces. It saves the cost of installation of individual AC units which is expensive and helps maintain an environment with similar conditions.

In a central AC system, large compressors are used. A condensing unit is placed outside the building or the room which includes a compressor, a condensing fan and a condenser coil. Another unit which is the evaporative unit is placed in a central location and different locations are air conditioned by using a ductwork. The following image shows a central AC system:



Fig. 1.3.6: A central AC system

The following table shows the comparison among window AC, split AC and cassette AC:

AC Parameter	Window AC	Split AC	Cassette AC
Suitability	Small rooms having a window sill	Any room with no mandatory requirement of a window	Extensive indoor spaces
Noise production	On the higher side	Very less	Silent
Capacity	Ranges from 0.75 Ton to 2 Ton	Ranges from 0.8 Ton to 2 Ton	Ranges from 1 Ton to 4 Ton
Advanced Features	Possesses features such as humidity control, dust filter	Possesses features such as humidity control, dust control, bacteria control	Possesses features such as humidity control, dust control, bacteria control
Interference with home decor	Slight chances of interference with the curtains on the windows and drapes	Designer indoor units match nicely with the wall décor	Minimal interference with the interior décor
Ease of Installation	Requires very less effort	Indoor and outdoor units require a little amount of effort	Requires special false ceiling

Fig. 1.3.7: AC parameters

UNIT 1.4: Basics of Washing Machines

Unit Objectives



At the end of this unit, you will be able to:

- 1. Identify types of washing machines
- 2. Explain the basic working of a washing machine



1.4.1 Washing Machines

A washing machine is a machine which is used to perform all the laundry work such as soaking, washing, rinsing and drying clothes. The machine uses electrical energy which is supplied to the motor and the motor thus performs the mechanical work of spinning. In the spinning compartment water, soap and clothes are put. Due to constant spinning in different directions the clothes are cleaned. The machine can perform all the laundry functions and are available in various types and models as per the use of any individual. The following image shows a washing machine:



Fig. 1.4.1: A washing machines

The Washing Cycle

The complete process of washing of laundry including soaking, washing, rinsing and drying is known as a wash cycle of a washing machine. The following figure shows the components of a spinning cycle of a washing machine:

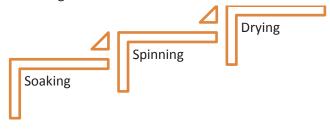


Fig. 1.4.2: Components of a spinning cycle of a washing machine

1.4.2 Working of Washing Machine

The washing machine contains several parts which work together to complete the washing of the laundry. The following image shows the components of a washing machine:

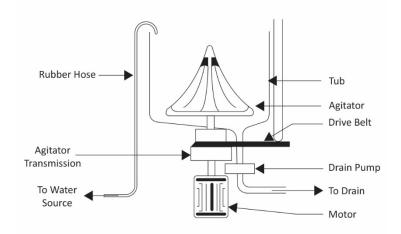


Fig. 1.4.3: Components of a washing machine

The detailed working of components of a washing machine is as follows:

- Tub or drum: It consist of basically two drums an inner drum and an outer drum. The outer drum is the bigger drum which we cannot see. It holds the water in it and remains stationary whereas the inner drum or tub is the one in which the clothes are loaded. It consists of small holes and paddles around the edges to slosh the cloths. The drum can be mounted vertically or horizontally as per the machine type.
- Agitator: In a top loading washing machine, mostly a paddle in the middle of the drum rotates to turn the clothes around in the water instead of an inner drum (which is mostly used in front loaded washing machines). This is called as an agitator.
- Motor: Motor is used to provide the rotatory motion to the drum or agitator of the washing machine.
- Drive belt: Drive belt is used to transfer the motion from the motor to the drive shaft of the tub.
- Inlet and outlet ports: Motorised pumps are used to fill water in the tub, through the inlet port located at the top of the machine up to a safe limit. There is an outlet port which removes the dirty water after the completion of a wash cycle. The outlet port also opens if the water is filled in the tub above the safe limit.

1.4.3 Types of Washing Machines

There are basically two types of washing machines, categorised on the basis of loading of the laundry in the machine.

Top loading washing machines

This type of design for washing machine allows the user to place the laundry in a vertically mounted perforated basket which is in a tub filled with water with an agitator in the centre. When the laundry is loaded from the top the motor on the bottom rotates the basket in circular motion. The shape is designed such that the clothes hit the wall of the basket and then fall in the middle of the basket. Due to this constant turbulent movement, the clothes are washed. The following image shows a top loading washing machine:



Fig. 1.4.4: A top loading washing machine

Front loading Washing Machines

In the case of a front-loading washing machine (also known as horizontal axis washer) the laundry is loaded in the machine from the front of the machine and the container is placed in a horizontal position.

The horizontally installed washer motion helps the fabric to be soaked in only as much water as is needed to moisten the fabric. This helps in less usage of water and detergent as well as good washing of clothes. The following image shows a front-loading washing machine:



Fig. 1.4.5: A front loading washing machine

UNIT 1.5: Electronic Waste (e-waste) Management

Unit Objectives



At the end of this unit, you will be able to:

- 1. Explain about electronic waste (e-waste)
- 2. Identify the properties of e-waste
- 3. Identify the methods of e-waste management
- 4. Explain the role of field engineer for RACW
- 5. Identify the importance of work

1.5.1 Electronic Waste (E-waste) –

Electronic waste also called as e-waste is the electrical/electronic waste. Used electronic devices or their part which cannot be resold, recycled or disposed comes under e-waste. This kind of waste can be harmful for the environment and living organisms. Some examples of e-waste are shown in the following images:





Fig 1.5.1: Electronic waste (e-waste)

Some of the examples of e-waste are:

- Copper or other metal parts from the refrigerator/AC
- Housing of electrical components
- Electrical wires
- Chips of electronic circuits

Effects from E waste:

- Air pollution: The burning of waste and chemical reaction due to contact of different electrical components or their decomposition produces harmful gases in the air.
- Land pollution: E-waste dumped in the soil makes the soil infertile and also reacts with the natural nutrients of the soil to make it poisonous.
- Water pollution: The chemicals in e-waste react with water to create chemicals which poison the water.

1.5.2 E-waste Management _____

Electronic waste management includes all the actions which are performed to manage the e-waste from its origin to its final disposal. Basically, it includes collection, transportation, treatment and disposal of e-waste. It also includes monitoring of the waste and

regulations to control its management. It also includes legal and regulatory framework that are related to the waste management for e- waste recycling.

Basic steps included in e-waste management to be performed by the field engineer are:

- Identification of e-waste:
 - The field engineer should be able to identify the items which cannot be used again and then properly discard the waste safely.
- Handling the waste:
 - The field engineer should be able to handle the waste properly without affecting the environment or any living organism.
- Recycling the waste:
 - E-waste such as old metallic tubes and electric housing components which can be reused in another place can be sold to recyclers by the field engineer for the recycling process.

1.5.3 Role of a Field Engineer -

Field engineers are the front-line executives who are directly in contact with the customer. They must be present in the field, on the location to carry out any kind of servicing or installation. It is important to understand the technical features of RACW as per the latest market trends. The field engineer should also be able to interact with the customer, colleague or supervisor effectively to resolve the issues quickly and take actions to get 100% productivity from the work.

Some basic responsibilities of a field engineer for RACW are:

- 1. The individual at work is responsible for installation of various appliances at customer's premises.
- 2. Responsible for identifying and rectifying faults in various appliances of the customer.
- 3. The individual attends to the machine in the field and tries to solve the issues at the site only.
- 4. The job requires the individual to have attention to details, ability to listen, patience, steady hands, logical thinking and customer orientation.
- 5. The individual must work on the desk with different types of equipment used for testing and repairs.











2. Basics of Electricity and Electronics

Unit 2.1 - Basics of Electric Circuits

Unit 2.2 – Components of Electric Circuits

Unit 2.3 – Inverter Technology

Unit 2.4 - Units of Measurement in RACW



Key Learning Outcomes

At the end of this module, you will be able to:

- 1. Describe electric circuits
- 2. Describe voltage, current and resistance
- 3. Define Ohm's law
- 4. Explain the difference between alternating current (AC) and direct current (DC)
- 5. Measure power and energy
- 6. Describe the active components
- 7. Describe the passive components
- 8. List electromagnetic components
- 9. List the basic functions of inverters
- 10. Identify the advantages of inverters
- 11. Explain the controller functions

UNIT 2.1: Basics of Electric Circuits

Unit Objectives



At the end of this unit, you will be able to:

- 1. Describe electric circuits
- 2. Define voltage, current and resistance
- 3. Define Ohm's law
- 4. Explain the difference between alternating current (AC) and direct current (DC)
- 5. Measure power and energy

2.1.1 Electric Circuits -

An electric circuit is a path made by the interconnection of electrical components. Electrons from a voltage or current source flow along this path. The following figure lists the elements present in a basic electric circuit:



A device in a circuit which consumes electric power is called load.

Example: Bulb



A source that provides electrical pressure known as voltage or EMF to electrical equipment to enable them to work.

Example: Battery




A conductor that connects the supply source and the load.

Example: Wires

Fig 2.1.1: Electric circuit constituents

An electric circuit consists of two paths/loops, as shown in the following image:



Open Path

Closed Path

Fig 2.1.2: Closed and open path

In a typical circuit, a battery provides voltage for the load through wires. For example, the required voltage for a bulb to glow is provided by a battery. The following image shows such an electric circuit:




Fig 2.1.3: An electric circuit

2.1.2 Types of Electric Circuits

An electric circuit is classified into two types:

- Series circuit
- Parallel circuit

Series Circuit

In this type of a circuit, all components are connected as a chain and the current flowing through each one of them is the same all over the circuit. There is a single route through which the current flows. So, the current passes through each and every component. Opening or breaking any point in a series circuit causes the whole circuit to stop functioning which then needs to be replaced. The following image represents a series circuit:




Fig 2.1.4: A series circuit

Parallel Circuit

In this type of a circuit, two or more components are connected in a parallel manner. In a parallel circuit, the components are of the same voltage. The current flow varies across the components. If any point of the circuit gets damaged, only that part needs to be replaced. The following image represents a parallel circuit:




Fig 2.1.5: A parallel circuit

2.1.3 Parameters of Electric Circuit

Electricity is a natural force that comes into existence whenever there is a flow of electric charge between any two components. When working with circuits, awareness about some of the basic concepts of electricity is needed, otherwise a wrong connection in a circuit may cause high damage to the user and the circuit components. The main parameters associated with electricity are as follows:

- Voltage
- Current
- Resistance

Voltage

A force that causes electricity to move across the wire/cable is known as voltage. It can also be defined as the variance in the charge between the points of a circuit. Depending on the voltage, the electric current flows through a medium of a specific resistance. Volt is the unit of voltage and is denoted with letter V.

Current


Electric current, or simply current, is the flow of electric charge carried through electrons moving across wires. Ampere is the unit of current and denoted with letter I. The units of current are listed in the following table:


Unit	Denoted by
Micro-Ampere	(μA) = 10-6A
Millie-Ampere	(mA) = 10-3A
Ampere	(A)

Fig 2.1.6: Units of current

AC and DC Current

The following figure lists the two types of current sources that are dependent on the direction in which the electrons flow:





AC can be defined as the flow of current in which electrons keep switching directions, going either forward or backward.

In this the magnitude of induced current varies with time.

Types of AC are Sinusoidal, Trapezoidal, Triangular, Square. DC can be defined as the flow of current in which the drift of electrons remains steady either in a single direction, or forward.

In this the magnitude of induced current remains constant.

Types of DC are Pure and Pulsating.

Fig 2.1.6: Difference between AC and DC current

Resistance

Resistance, as the word suggests causes hindrance to any occurring force. In other words, it is an obstruction caused by a substance to the current flow. The unit of resistance is ohm and it is denoted with the symbol, Ω . According to Ohm's law, 1Ω resistance allows 1A of current to flow from one point to the other with a 1V voltage difference.

2.1.4 Ohm's Law

According to Ohm's law, the flow of current through a conducting material is directly proportional to the conductor's voltage. The mathematical equation of Ohm's law is as follows:

I = V/R

where,

I is the current

V is the potential difference

R is the resistance

Ohm's law states that R in the preceding relation is constant and independent of the current flowing through it as shown in the following image:



Fig 2.1.7: A simple electric circuit

2.1.5 Power Calculation and Energy Consumption

When electricity flows in an electric circuit, it results in some work done. For example, when it flows in a fan, the fan's blades rotate and when it flows in a refrigerator, it cools the things inside. Thus, when electricity flows through an appliance, it results in some work done. To calculate the electricity consumed, the following two parameters need to be considered:

- Power
- Energy

Power

The rate at which electrical energy flows through an electric circuit is known as electrical power. Similar to mechanical power, electric power is the rate of doing electrical work, measured in watts (one joule per second) and denoted by *P*. The term wattage often refers to electric power in watts.

Thus, to denote the electric power (in watts) given by an electric current I consisting of a charge of Q coulombs in every t seconds through an electric potential (voltage) difference of V, use the following equation:

P= work done per unit time =VQ/t = VI

Energy

If the electric power is the rate or speed of work done, then electric energy is the total amount of work done in a given time period. It is a product of the power of an electrical appliance and the duration of its usage. Electric energy can be explained with the following equation:

Electrical Energy (E) = Power (P) x Duration of Energy usage (T) = Power (Watt) x Time (hour) $E(Wh) = P(W) \times T(h)$

Power = Energy / Time

Example:

Electricity charges are paid based on "Units of Consumption"

1 unit = 1 kWh

If 500W is used for a device for 4 hours, then consumption is = 0.5 kW * 4 Hrs. = 2 KWh (2 units). By multiplying the power consumption with rate of electricity, the electricity bill for the usage is determined.

UNIT 2.2: Components of an Electric Circuit

Unit Objectives



At the end of this unit, you will be able to:

- 1. Describe the active and passive components
- 2. List electromagnetic components

A circuit consists of a number of components that may be electrical, electronic, mechanical and so on. The following figure represents various types of circuit elements or components that are used in a control panel:




Fig. 2.2.1: Circuit elements

2.2.1 Active Components -

Active components depend on a source of energy to perform their functions. These components can amplify current and can produce a power gain.

The following figure lists the different types of active components in a circuit:

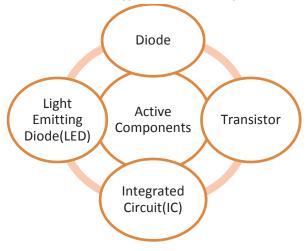


Fig. 2.2.2: Active components

Diode

A diode is a specialized electronic component with two terminals known as the anode and the cathode. It has asymmetric conductance, which means that it conducts mainly in one direction. It has very less resistance, ideally zero, to the flow of current in one direction whereas it has high resistance, ideally infinite, in the other direction. Diodes are usually made up of semiconductor materials such as germanium, silicon or selenium. Appliances such as refrigerators, air conditioners and washing machines have this component. The following image shows diodes:



Fig. 2.2.3: Diodes

Transistor

A transistor is an electronic device, made up of a semiconductor material. Usually, it consists of three or more terminals for connecting to an external circuit. It is utilized to amplify or switch electrical power and electronic signals. Appliances such as refrigerators, air conditioners and washing machines have this component.

The following image shows a transistor:



Fig. 2.2.4: A transistor

IC

An IC, also known as a microchip, is a semiconductor wafer on which a number of small resistors, capacitors and transistors are fabricated. It can work as an oscillator, an amplifier, a timer, a counter, a microprocessor or as computer memory. Appliances such as refrigerators, air conditioners and washing machines have this component. The following image shows an integrated circuit:



Fig. 2.2.5: An integrated Circuit (IC)

LED

An LED is made of a p-n junction diode which releases light when it is activated. It is a two-lead semiconductor source of light. Energy is released as photons when a suitable voltage is applied to the leads. Appliances such as refrigerators, air conditioners and washing machines have this component. The following image shows an LED:



Fig. 2.2.6: An LED

2.2.2 Passive Components

Passive components are those components which can perform their specific functions without any power source. These components are incapable of controlling current.

The following figure lists the different types of passive components in a circuit:

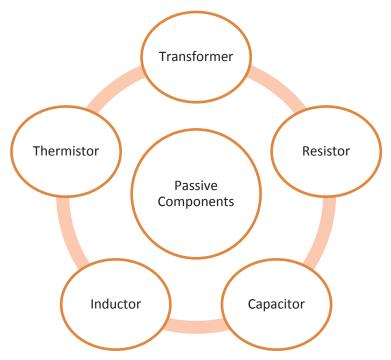


Fig. 2.2.7: Passive components

Transformer

A transformer consists of a metal core with coils of wire around it. It is a device used to convert alternating current (AC) to the required values by decreasing or increasing the alternating voltages in an electronic or electric system. Appliances such as refrigerators, air conditioners and washing machines have this component.

The following image shows a transformer:



Fig. 2.2.8: A transformer

Resistor

A resistor is a component in an electronic circuit which is built to resist or limit the flow of current in that circuit. It may be a small carbon device or big wire-wound power resistor. Its size varies in length from 5mm up to 300mm. Appliances such as refrigerators, air conditioners and washing machines have this component.

The following image shows resistors:




Fig. 2.2.9: Resistors

Capacitor

A capacitor is a device which is made up of one or more pairs of conductors and an insulator separating them. It is used to store electric charge. Appliances such as refrigerators, air conditioners and washing machines have this component. The following image shows capacitors:



Fig. 2.2.10: Capacitors

Inductor

An inductor consists of a coil or a wire loop. This component is used to store energy in the form of a magnetic field. The more the turns in the coil, the more will be the inductance. Appliances such as refrigerators, air conditioners and washing machines have this component.

The following image shows inductors:



Fig. 2.2.11: Inductor

Thermistor

A thermistor is a kind of resistor which is more sensitive to temperature as compared to other resistors. It is extensively used as an inrush current limiter, temperature sensor, self-regulating heating element and self-resetting overcurrent protector.

Appliances such as washing machines have this component. The following image shows a thermistor:



Fig. 2.2.12: A thermistor

2.2.3 Electromechanical Components

Electromechanical components convert electric energy into mechanical energy (mechanical movement) or vice versa for carrying out electric operations. The following figure lists various electromechanical components:

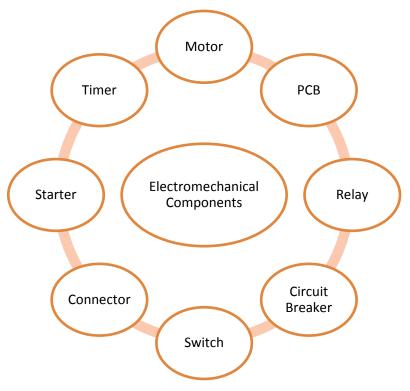


Fig. 2.2.13: Electromechanical components

Motor

A motor is an electrical component which is used to transform electrical energy into mechanical energy to produce linear or rotary force. Unlike magnetic solenoids, they generate usable mechanical powers.

In a normal motoring mode, force is generated inside the motor through the interaction between its winding currents and magnetic field. Appliances such as refrigerators, air conditioners and washing machines have this component. The following image shows the motor used in a mixer grinder:



Fig. 2.2.14: Amixer grinder motor

Types of motors are:

- 1. Capacitor start motor
- 2. Relay start motor

Capacitor Start Motor

In a capacitor start motor, the capacitor is connected in series with the starter winding, which causes current in starter winding. When the motor reaches 75% of the rated speed, the capacitor and the starter winding is disconnected by a switch.

A capacitor start motor is used in air conditioners and washing machines. The following image shows a circuit diagram of a capacitor start motor:

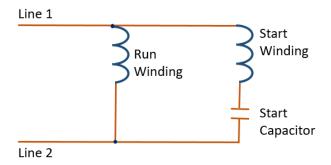


Fig. 2.2.15: Circuit diagram of capacitor start motor

Relay Start Motor

In a relay start motor a relay is connected between the starter and run winding, which causes current in starter winding. Then the resistance of motor increases with current, which cuts the start winding then the motor works only on run winding.

Relay start motor is used in refrigerators. The following image shows a circuit diagram of a relay start motor:

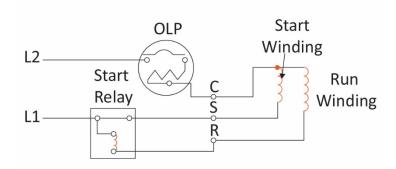


Fig. 2.2.16: Circuit diagram of relay start motor

Printed Circuit Board (PCB)

A PCB acts as a base for the components that are mounted on its surface and are interconnected with wires, conductive tracks and so on. The components are generally soldered on the circuit board according to the specified design. Appliances such as

refrigerators, air conditioners and washing machines have this component. The following image shows a PCB:



Fig. 2.2.15: A PCB

Connector

A connector is a device which is used to join two circuits together. The connector may be a port, a plug, a cable connector and so on. All appliances have this either in the form of a cable connector or a plug, as shown in the following image:



Fig. 2.2.16: Plug

Switch

A switch is a component used to make or break connections in an electrical circuit. A switch is used to divert the current from one conductor to another. It can be operated manually to control a circuit such as a light switch or can be operated by a moving object. It is made to control a wide range of currents and voltages.

The following image shows a typical switch used in small appliances such as refrigerators, air conditioners and washing machines:



Fig. 2.2.17: A rotary switch

Relay

A relay is a switch that controls an electrical circuit by opening and closing contacts in another circuit, electromechanically or electronically. In electromechanical relays, the opening and closing of contacts is done by a magnetic force. The electromechanical relays are operated by an electromagnet which is a coil of wire wrapped round an iron core. In solid state relays, the switching is electronic as there are no contacts. Appliances such as

refrigerators, air conditioners and washing machines have this component. The following image shows both the relays:



Fig. 2.2.18: Solid state relay and electromagnetic relay

Circuit Breaker

A circuit breaker is a requisite component of an electrical power system required for its control and protection. It is a switching device which can be operated manually as well as automatically. Its main function is to shield an electric circuit from harm caused by overload or short circuit. It interrupts the current flow when protective relays find out a fault. Appliances such as refrigerators, air conditioners and washing machines have this component. The following image shows a circuit breaker:



Fig. 2.2.19: A circuit breaker

Starter

A starter is a device that is used to start, stop, reverse and protect a motor. It controls the supply of electric power to the motor. It has two important parts, contactors and overload protection. Appliances such as air conditioners and washing machines have this component. The following image shows a starter:



Fig. 2.2.20: A starter

Timer

A timer, also known as a time switch, is a special type of clock that measures time intervals. It operates a switch that is controlled using a timing device. A timer may be built into a power circuit such as a water heater timer. It may also be built into the equipment such as a timer that turns on/off washing machine after a set period.

Even air conditioners have timers that turn it off after a set period. In case of refrigerators, there is a defrost timer that turns on after a set period of 15 to 30 minutes to melt the frost from the evaporator coil.

The following image shows some appliances that have a timer:







Fig. 2.2.21: A timer

UNIT 2.3: Inverter Technology

Unit Objectives



At the end of this unit, you will be able to:

- 1. List the basic functions of inverters
- 2. Identify the advantages of inverters
- 3. Explain the controller functions

2.3.1 Inverter -

The inverter technology is used to control the motor speed of the compressor. A DC inverter has an adjustable electrical inverter with variable frequency drive which helps control the speed of the electromotor. This drive converts the input AC current flow to DC and then the current is modulated to a desired frequency. This helps improve the efficiency of the appliances and the life of the compressor. It also reduces the noise produced by the appliances.

The following figure shows the basic workflow of an inverter in an AC:

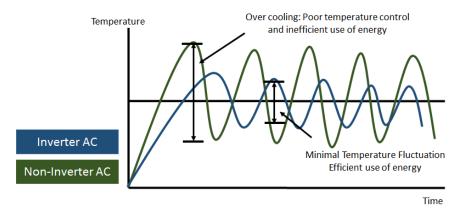


Fig. 2.3.1: Basic workflow of an inverter in an AC

The inverter's main functions are listed in the following figure:

Converting DC electricity into AC

Wave shaping of the produced AC electricity

Regulation of the value effectiveness of the produced voltage

Fig. 2.3.2: Basic functions of an inverter

2.3.2 Advantages of Inverters

The following table shows advantages of inverter-based appliances over non-inverter-based appliances:

Item	Non-Inverter	Inverter
Time to reach pre- set temperature	Relatively long due to fixed capacity	Short because of increased capacity
Fluctuations after reach pre-set temperature	Major fluctuations due to start/stop operations	Minor fluctuations due to load adaptable operations
Sudden current flow when the compressor started	5-6 times rated value	1.5 times rated value due to gradual increase at the start
Low temperature range during heating	Decrease in capacity	Decrease in capacity compensated by increased rotational speed
Defrosting time	Relatively long due to fixed capacity	Short due to maximum capacity operations
Unit composition	Relatively simple	Extra parts required
Trouble diagnosis	Relatively easy	Complicated

Fig. 2.3.3: Advantages of inverter-based application

2.3.3 Controllers -

Refrigerators, air conditioners and washing machines all require a control system to regulate the heating, cooling and air conditioning operations. A sensing device compares the actual state like the current temperature and pressure with the target state. Then it is the function of the control system to take action to start or stop the functioning of components like compressor, condenser etc. The following image shows an AC controller:



Fig. 2.3.4: An AC Controller

There are different types of controllers as shown in the given figure:

Compressor On/OFF Controller

- •It starts working as per the set temperature and the ambient temperature status.
- While cooling, the compressor is turned ON when the ambient temperature is higher than the set temperature and when the temperature drops below the dead band temperature.

Compressor AC/DC Inverter Controller

- •This type of controller has better control as the compressor in this does not turn OFF completely.
- •In it the frequency of the compressor rotation varies as per the load.
- •This type of controller is more energy efficient and ecofriendly.
- •For cooling function a setting of 24 °C and in heating function a setting of 28 °C is considered as a good energy saving setting.

Fan Controller

- •The fan controller enables us to put the fan is Low, Medium, High or Auto mode.
- •The Auto mode works by determining the room temperature and set temperature.

Timer Controller

- •It is a clock based controller which turns the system ON/OFF as per the settings.
- •To make the user set the time to enable working of the systems.
- •In air conditioning, customer can set the AC to switch ON or OFF for a set time.
- In washing machine systems user can set the spin period and drying period by using timer control.

Ionizer Controller

- •It is located in the indoor unit and has a module of high voltage electronic setting that ionizes the air with negative ions.
- •This helps remove dust and contaminants from the surrounding air

Fig 2.3.5: Type of controllers

2.3.4 Four Way Valves

A four-way valve is an electro mechanical valve which is used to reverse the refrigerant flow of direction by using an electrical magnet. This is basically a heat pump reversing valve present in air conditioners and refrigerators. The heat pump is made up of four valves (A, B, C, D). The working of four-way valves involves two modes – heating and cooling mode.

Cooling Mode

Tube A is connected to the compressor discharge port which is at high pressure. Tube B is connected to the return valve return port of the compressor which is at low pressure. Thus, A has high pressure refrigerant and B has low pressure refrigerant.

The heat pump pushes the valve and allows the refrigerant at high pressure from tube A to tube D to outer coil, which drops the pressure of the metering device. Then the inner coil cools the area (inside of a house) and then comes back into tube C. The following image shows the working of a four-way valve in cooling mode.




Fig. 2.3.6.: A four-way valve in cooling mode

Heating Mode

In the heating mode the refrigerant at high pressure goes from tube A to tube C which enables the refrigerant to flow in the inner coil to heat the inner area (inside of the house). This provides heat in the inner area. Then the pressure drops as the refrigerant goes through a metering device which lowers the pressure and it comes back into tube D.

Then the slider enables the refrigerant at low pressure to go from tube D to tube B and come back to the compressor to repeat the cycle. The following image shows a four-way valve in the heating mode




Fig. 2.3.7.: A four-way valve in heating mode

UNIT 2.4: Units of Measurement in RACW

Unit Objectives



At the end of this unit, you will be able to:

- 1. Identify the standard units
- 2. List the conversion of BTU into other units
- 3. Explain efficiency and ratings of refrigeration and air conditioning

2.4.1 British thermal unit (BTU)

BTU or Btu (British thermal unit) is a traditional unit used in heat measurement. The BTU can be defined as the amount of heat which is required to raise the temperature of one pound of water by one-degree Fahrenheit. In metric system this unit is Calorie which can be defined as the amount of heat required to raise the temperature of one gram of water by one degree Celsius.

Heat is considered equivalent to energy.

1 BTU = 1055 joules

Conversions

One BTU is approximately equal to all these units as shown in the following figure:

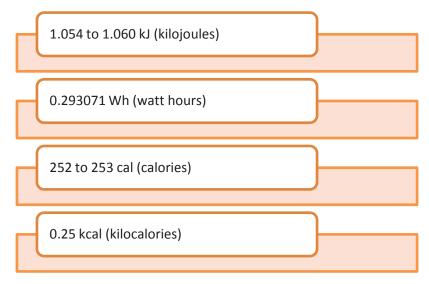


Fig. 2.4.1.: Conversion of BTU

2.4.2 Tons of Refrigeration and Rating

TR (Ton of refrigeration) is a unit of power which is used to explain the heat extraction of a refrigerator or an air conditioning system.

Ton of refrigeration can be defined as the rate of transfer of heat which causes the melting of one ton (907 kg) of pure ice which is at 0°C (32 °F) in a time period of 24 hours.

Refrigeration ton is equal to 12,000 BTU/hour or 3.5 kW.

The performance of refrigerators and air conditioners are specified by its capacity in BTU/h.

EER (Energy Efficiency Ratio)

The EER (Energy Efficiency Rating) is a score rating for the appliance used to measure their capacity and efficiency. It can be calculated by the ratio of cooling capacity to power consumption.

Higher EER means better efficiency

Calculated EER of 1TR

Cooling capacity = 3,514 W

Power consumption = 1,500 W

EER = 3,514/1,500 = 2.34

BEE standards

BEE (Bureau of Energy Efficiency) star rating system is based on EER. It is ranged from 0 to six. The higher the number of stars, better the efficiency of the appliance. This rating is mandatory as per the ACT to be followed by all the manufacturers. The following is the table which shows the EER ratings as per the BEE standards star rating band.

EER (W/W)				
Star Rating Min Max	Star Rating Min Max	Star Rating Min Max		
1 Star *	2.70	2.89		
2 Star **	2.90	3.09		
3 Star ***	3.10	3.29		
4 Star ****	3.30	3.49		
5 Star ****	3.50			

Fig. 2.4.2.: EER ratings









3. Tools and Equipment Handling

Unit 3.1 – Identify the Use of Tools and Equipment

Unit 3.2 – Safety and Maintenance of Tools



Key Learning Outcomes



At the end of this module, you will be able to:

- 1. List the different types of tools used for installing appliances
- 2. Identify the correct methods of using tools
- 3. Maintain and handle tools properly
- 4. Identify the safety methods to be followed while handling tools

UNIT 3.1: Identify the Use of Tools and Equipment

Unit Objectives



At the end of this unit, you will be able to:

- 1. Identify the types of tools used for installation
- 2. Identify the equipment used in installation of appliances

3.1.1 Introduction to Tools

Tools are non-consumable items that can be used in installing or servicing electronic appliances. Tightening of bolts, stripping wires and measuring angles and length can be easily done with the help of specific tools.

Hand tools are the tools which are operated easily to perform tasks by using power and grip of hand. Some examples of hand tools are screw driver, hammer, measuring tape, wrenches and so on.

Tools are essential for a field technician as it helps the technician to complete the task of installing appliances easily with less effort.

The following is an image of basic tools used in installation of appliances:



Fig. 3.1.1: Tools used in appliance installation

3.1.2 Basic Tools —

The following tools are used for basic installation and servicing of appliances:

- **1. Detachable small handle screwdriver**: A screw driver which can be used from either end. One end has a '+' shape for '+' shaped screws and other end for '-' shaped screws.
- 2. Detachable long handle screw driver: A similar kind of screw driver with long stem. This also can be used from either end. One end has a plus '+' shape for '+' shaped screws and other end for minus'-' shaped screws.
- **3. Slim line slot head screw driver:** Used where we cannot reach with our hands or even fingers. It has a long and thin stem and has a minus'-' shape.

- **4. Round screw driver:** Used to screw and un-screw the minus '-', plus '+', star '*', hexagonal or any other type of screws. It has a magnetic front socTat which can hold bits of various shapes.
- 5. Bit pad: A pad with eight-ten bits of varied shapes to use with round screw driver.
- **6. Extension bit/rod:** A component that is attached to the front of the round screw driver to increase its length. Once attached, it increases the reach of the screw driver by an inch to three-four inches. The following is an image of a screw driver set:



Fig. 3.1.2: A screw driver set with bits

7. Tester: It is used to check the presence of electric current in various sockets and wires during installation process. The following is an image of a tester:



Fig. 3.1.3: A tester

- **8. Double ended round spanner:** A round spanner that can be used at either end. Each end has a different size. Generally, a set of spanner has a combination of sizes 10-11mm, 12-13 mm or 13-14mm.
- **9. Simple spanner:** A normal spanner (wrench) which can be used at either end. These are also two in number. One is a combination of 10-11mm and other being a combination of 12-13mm and 14-15mm. The following is an image of spanner set:



Fig. 3.1.4: Spanner with wrench heads

10. Adjustable wrench: It is a spanner that can be adjusted as per the head size of a nut/bolt. It is helpful in situations where the installation engineer encounters a head which is either bigger or smaller than the limited sized spanner they otherwise carry along with them.

11. Measuring tape: It is a self-retracting pocket tape measure which is used to measure wall thickness and other measurements while carrying out installation. The following is an image of a measuring tape:



Fig. 3.1.5: A measuring tape

12. Spirit level meter: It is an ideal tool for precise determination of horizontals, inclines and angles of surface. The following is an image of a spirit level meter:



Fig. 3.1.6: A spirit level meter

13. Heavy duty hammer: It is used for driving nails, fitting parts, and breaking objects. It has a handle and a head, with most of the weight in the head. One side of the head has a little slit that is used to pull out nails from walls or wooden brackets. The head of the hammer can be used as a reliable guide for minimum bend radius of coaxial cable while clipping it to the wall. The following is an image of a heavy duty hammer:



Fig. 3.1.7: A heavy duty hammer

- **14. Pliers:** Pliers are hand tools, designed primarily for gripping objects by using leverage. Three types of pliers are used by installation engineers:
 - a. **Combination pliers:** These are used for gripping small objects, to cut and bend wire and cable and to hammer other small tools such as a chisel or screwdriver and small nails. These pliers have a gripping joint at their snub nose, and cutting edge in their craw. They also have insulated handle grips that reduce (but do not eliminate) the risk of electric shock from contact with live wires.
 - b. Side cutter or heavy duty cutter: These are used to cut wires and nails.
 - c. Wire stripper/cutter: Used for stripping wires, removing insulation on electrical wire while leaving the wire intact. It is an adjustable plier which can be adjusted using a screw driver to enable its usage on a thicker wire as well.

The following is an image of pliers and cutters:



Fig. 3.1.8: Cutters and pliers

- **15. Compression tool**: This is used to compress the connector on to the wire end. The connector is then connected to the LNBF of Antenna or to STB jack.
- **16. Cable preparation tool:** It is used to cut the cable and prepare it for use during installation. The following is an image of cable crimping tools:



Fig. 3.19: Cable crimping tools

Note: Compression and crimping tools are generally used together. Crimp tool is used to cut the wire and the compression tool is used to fix the connector to the end of a wire. Never try to cut the outer sheet of coaxial cable manually as it may cause problems later

- **17. Component box:** A small box to keep small spare parts like screws, nuts, bolts, p-clips etc.
- **18. Drill machine:** It is used to create holes and through-holes in concrete and masonry (max. diameter 20 mm). It is also used for drilling metal sheets, wood, drywall and driving screws. It operates at 600 W. It can be operated in two modes, normal as well as hammer. The normal motion is a rotatory motion whereas hammer motion is a combination of rotatory and hammer motion. There are separate bits for both the modes. The following is an image of a drill and drill bits:



Fig. 3.1.10: A drill machine and drill bits

19. Bits: The way drill machine has two modes, normal and hammer. Bits are also of two types. One set of bit is used for normal drilling whereas the other for hammer drilling. Hammer drilling bit has got a different shape and has grooves for better grip. Hammer bit

- is generally used for concrete and comes in varied sizes such as 6mm, 8mm, 10mm, 12mm and of 47mm length.
- **20. Digital multimeter**: It is an electronic device which is capable of taking various electronic measures such as current, voltage or resistance. The basic measurements that are normally made include voltage, current (both AC and DC) as well as resistance. Advanced multimeters have a variety of other functions such as measurement of frequency (not up to a high level of precision), capacitance and temperature. The following is an image of a multimeter:



Fig. 3.1.11: A digital multimeter

- **21. Torch:** A battery operated source of light. It is kept in the tool kit to use in case the light fades or is not appropriate during the time of installation.
- **22. Hacksaw**: It is used by the installer to cut a plastic pipe or a plastic conduit. It is a hand saw with a C shaped frame which holds a blade. The following is an image of hacksaw:



Fig. 3.1.12: A hacksaw

23. Cutting knife: It is used at workplace to cut the tape of sealed package without damaging the packaging content. It is also known as a utility knife. The following is an image of cutting knife:



Fig. 3.1.13: A cutting knife

24. Keyhole saw: It is used to cut holes in drywall or softer woods for new electric switch in the wall. It has a plastic or wood handle with a pointed blade. In some keyhole saw, various blades can be fitted in the same handle. The following figure shows a keyhole saw:



Fig. 3.1.14: A keyhole saw

25. Tube cutter: This tool is used to cut a copper or a plastic pipe in a clean, convenient and faster manner. It is also known as a pipe cutter. The following image shows a tube cutter:



Fig. 3.1.15: A tube cutter

26. Torque wrench: It is used to measure the torque in nuts or bolts. It is mainly used in prevention of over tightening of bolts and steam pipe and water pipe repairs underground. The following figure shows a torque wrench:



Fig. 3.1.16: A torque wrench

27. Wrench: This tool is used to turn fasteners such as nuts and bolts by applying torque and tighten the screw. The following image shows a wrench:



Fig. 3.1.17: A wrench

28. Refrigerant gas detector: This tool is used to detect a gas leak around the appliance or in the surrounding. The following figure shows a gas detector:



Fig. 3.1.18: A gas detector

29. Digital clamp meter: An electrical tester which combines a multimeter with a current sensor is known as a clamp meter. The probes in the device measure voltage whereas the clamps measure the current. The clamps are the hinged jaws joined to an electric meter that allows users to clamp around the cable/wire anytime for measuring the current without disturbing any other element. While using a clamp meter, the wire/cable to be measured is not disconnected.

The following image shows clamp meter:



Fig. 3.1.19: A clamp Meter

UNIT 3.2: Safety and Maintenance of Tools

Unit Objectives



At the end of this unit, you will be able to:

1. Safety measures to be taken while handling tools

3.2.1 Safety while Handling Tools

The tools selected for a particular set of job should be specifically suitable for the job. The tool should have a proper handle grip so as to avoid slipping of the tool while working. The tools should be used only for the purpose they are made for and not for any other purpose. The tools should be used under the safe working limits as per the design specification of the tool.

A technician should always wear personal protective wear such as safety gloves, safety helmet, safety goggles, safety shoes, ear protecting plugs and safety mask. The following are the images of personal protective equipment:



Fig. 3.2.1: Personal protective equipment (PPE)

The tools should be carried in proper toolbox in a managed and organised way. The tools should be kept at a secure place to avoid any unauthorised access and accident from the tools. Before working, check the work piece to prevent any damage to the tool to be used on the work piece.

While working at heights, tools should be tied or put in safe place to avoid any slipping and dropping of the tool. The tools should be operated in a correct position with proper strength for holding and operating the tool effectively. While using tools, correct procedure should be followed as per the manufacturer's instruction to operate the tool. While using sharp edged tools, ensure that the direction of movement of the tool should be away from the body. After the completion of work tools should be put in the appropriate place securely.

3.2.2 Maintenance and Housekeeping of Tools

As tools are essential for a service technician, regular maintenance and check needs to be done to maintain the tools in good condition. Using or working with a damaged, broken or unsuitable tool is hazardous.

To keep the tools in good conditions following steps should be checked:

- Get the tools from the store as per the requirement and return the tools in good condition after completion of work.
- A regular routine check of the tools should be done to examine the condition of the tools.
- Get the damaged and worn out tools fixed else get the tools replaced.
- Before and after completion of the work clean the tools properly.
- Edges of sharp edged tools should be maintained sharp.
- The tools should be kept in the store department in an ordered way in proper toolboxes.
- Sharp tools should be kept with protective guard over the sharp edges.
- Broken tools should be discarded with care.
- Regular examination, repair and maintenance of the tools should be carried out only by a competent person.
- Report about any issue related to damage or faulty tool/equipment to the store supervisor or senior.

3.2.3 Safety while Working

While working at a site, make sure you follow the safety regulations to avoid any accident. Safety is the primary concern as per the company's policy and standards.

Safety should be followed:

- While handling tools/equipment's
- Climbing an elevated surface or using ladders

The given safety points should be considered while working:

- Overloading While using tools/equipment's make sure that they are not overloaded or operated beyond working limits. The ladder or structure over which you need to work should not be overloaded as well.
- Overreach Do not try to reach beyond a point while working on a ladder or an elevated surface. Keep the safety line tied with the safety belt while working.
- Resting tools Avoid resting or hanging of tools over an elevated surface.
- Carrying tools Always carry tools safely or use tool belts for carrying tools.
- Stability Always ensure to make a stable point of contact on the ground and especially on an elevated surface like a roof or a ladder. Ensure making three points of contact rule for stable position before starting the work.
- Standardised equipment Make sure you are using standardised equipment like tools, ladders and safety equipment.

 Maintenance – Always maintain your tools and equipment in good condition and clean them before using.

First Aid

While working at the site and handling tools and equipment a person might suffer some injury. So, to handle such a situation the technician should carry a first aid kit which can help provide the first aid necessary. The first aid box may contain:

- Instructions to provide first aid.
- Sterile and antiseptic liquids.
- Bandages of appropriate sizes and cotton.
- Scissors, clippers and tweezers.
- Cold pads.
- Disposable gloves.

The technician should also have a basic knowledge to provide first aid. Also in case of any accident, contact emergency services as soon as possible via communication methods.









4. Refrigeration

Unit 4.1 – Uses of Refrigeration and Refrigeration Cycle

Unit 4.2 – Basic Components of Refrigerators

Unit 4.3 – Refrigerants

Unit 4.4 – Need and Types of Refrigerators

Unit 4.5 – Safety Precautions, Policies and Procedures

Unit 4.6 – DC Refrigerators

Unit 4.7 – FF Refrigerators

Unit 4.8 – Installing DC & FF Refrigerators

Unit 4.9 – Repairing DC & FF Refrigerators

Unit 4.10 – Sealed Systems

Unit 4.11 – Copper Pipe Processing



Key Learning Outcomes



At the end of this module, you will be able to:

- 1. Describe the refrigeration cycle
- 2. List the basic components of a refrigerator
- 3. Explain the properties and types of refrigerants
- 4. Describe environmental effects of refrigerants
- 5. List the types of refrigerators
- 6. Follow safety precautions, policies and procedures
- 7. Explain the working of DC refrigerator
- 8. Explain the working of FF refrigerator
- 9. Install DC and FF refrigerators
- 10. Repair DC and FF refrigerators
- 11. Describe sealed system
- 12. Explain copper pipe processing

UNIT 4.1: Refrigeration Cycle

Unit Objectives



At the end of this unit, you will be able to:

- 1. Define refrigeration
- 2. Identify the uses of refrigeration
- 3. Explain refrigeration cycle

4.1.1 Refrigeration

Imagine a scenario where a food item such as an apple is left out in the open at room temperature. The food starts spoiling at a fast rate due to the presence of bacteria in the air. The same apple stays fresh for a longer period of time if it is kept in a refrigerator. Since ancient times, it was discovered that the growth rate of bacteria slows down in lower temperature. This led to the development of refrigeration process as a way to preserve and store food.

Refrigeration is the process of removing unwanted heat from an object or an area and transferring it to another object or area. This enables an item to be stored below room temperature by keeping it in a system that is designed to cool or freeze.

A system/ machine that provides refrigeration under controlled conditions is called refrigerator. A refrigerator uses a chemical substance called refrigerant to transfer heat from one area to another. The following figure shows a domestic refrigerator:



Fig. 4.1.1: A refrigerator

4.1.2 Uses of Refrigeration –

Refrigeration has had a huge impact on lifestyle, agriculture, manufacturing and processing industry. It has made it possible to preserve food for long periods of time, to store and distribute agriculture produce over long distances, to facilitate many chemical processes, to manufacture different medicines and to provide comfort air conditioning.

The following image shows the major uses/ applications of the refrigeration:



Fig 4.1.2: Uses of refrigeration

Food industry

One of the most important applications of refrigeration has been in the food processing, preservation and distribution industry. It has enabled processing of raw food into packaged food such as beverages, dairy products and frozen foods. Processed food can be stored and preserved at temperatures at or below zero-degree C. Cold storages, refrigerated trucks and rail cars have made it possible to cover large distribution areas without affecting the quality and taste of the produce.

Chemical and process industry

Many chemical processes require temperatures below zero-degree C to work. Refrigeration has made it possible to separate and liquefy gases in petrochemical industry, dehumidify air, solidify solutes, remove heat from chemical reactions, recover solvents and control fermentation.

Pharmaceutical industry

Refrigeration has changed the face of the pharmaceutical and medical industry. It has made it possible to manufacture several antibiotics and other drugs that require a process known as freeze drying. It is now possible to store and distribute medicines, vaccines, blood plasma, and tissues and preserve blood and bone marrow. It has enabled the use of local anaesthesia for surgeries.

Air conditioning

Air conditioning is based on the principle of refrigeration and has been developed to provide comfort to humans. Air conditioning in buildings such as homes, schools, offices, hotels, restaurants and so on ensure that the core body temperature is maintained around 37 degrees C thereby providing comfort and satisfaction.

Apart from comfort, refrigeration has provided suitable conditions in the industries to carry out processes required in the manufacture of various products. Some applications of industrial air conditioning are in:

- IT industry
- Printing industry
- Textile industry
- Semi-conductor industry
- Mines and power plants

4.1.3 Refrigeration Cycle

The basic principle behind the refrigeration process is that when a liquid expands into gas, it extracts heat from its surrounding area. A refrigerant is a chemical liquid which evaporates at a very low temperature enabling it to extract heat at a faster rate. This refrigerant is propelled through a closed system to ensure that it is not dispersed in the surroundings and can be used again and again.

The following figure shows the refrigeration cycle:

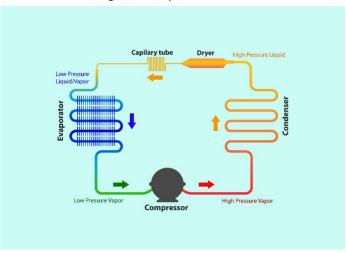


Fig 4.1.3: Refrigeration cycle

A refrigeration cycle consists of two sides or pressure areas, the evaporating or low pressure side and the condensing or high pressure side. A metering device such as an expansion valve or a capillary tube separates the two areas on one side. On the other side, a compressor is placed between the two areas. The metering device controls the flow of refrigerant and the compressor compresses the refrigerant into high pressure gas. The low-pressure refrigerant passes through the evaporator causing it to evaporate. This low-pressure vapour then enters the compressor where it is compressed into a high temperature, high pressure vapour. It then goes into the condenser where it gives up its heat to the cooler air passing through the condenser. The refrigerant condenses back into high pressure liquid which travels to the metering device. It is made to pass through a small opening resulting in a drop of temperature and pressure. This low-pressure refrigerant then enters the evaporator again, thereby completing the refrigeration cycle.

UNIT 4.2: Basics Components

Unit Objectives



At the end of this unit, you will be able to:

- 1. Identify the basic components of a refrigerator
- 2. Describe the working of the components of a refrigerator

4.2.1 Components of a Refrigerator

A refrigerator consists of four main components as shown in the following figure:

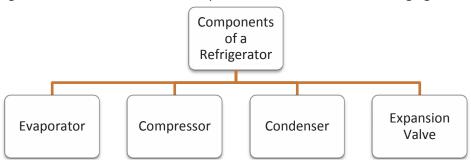


Fig. 4.2.1: Components of a refrigerator

Evaporator

The evaporator turns the cold, low pressure refrigerant into vapour. It is in the freezer section of the refrigerator and has a fan blowing across coils of copper or aluminium tubing. The cooler refrigerant absorbs the warmer heat from the surroundings and its temperature rises. This cools down the surrounding and a warm, low pressure refrigerant is sucked into the compressor. The following is an image of an evaporator:




Fig. 4.2.2: An evaporator

Compressor

The compressor is the most important part of the refrigeration system. It pulls in the low-pressure refrigerant from the evaporator through a suction line and compresses it into a high pressure vapour. The following is an image of a compressor:



Fig. 4.2.3: A compressor

The compressor is a mechanical device that consists of a power source, that is the motor and a compressing mechanism sealed inside a metal housing. There are five main types of compressors that are used in any refrigeration system. These are as shown in the following figure:

Reciprocating compressor

A positive displacement compressor that delivers gas at high pressure by using pistons

Scroll compressor

A positive displacement rotary compressor with a fixed and rotating scroll. Gas is compressed by confining in between the two scrolls

Screw compressors

A positive displacement rotary compressor made up of two intermeshing screws/ rotors. Gas is compressed by confining in between the two rotors

Rotary compressors

A positive displacement compressor that uses a rotary impeller to drive the air through a curved chamber to compress it.

Centrifugal compressors

A compressor that uses centrifugal force generated by rotating impeller blades to compress gas

Fig. 4.2.4: Types of compressors

Condenser

The condenser is a device that removes heat from the refrigerant and changes it to a liquid form. It consists of coils of aluminium exposed to the atmosphere and a fan that blows across the coils. It is located at the back of a refrigerator. When the hot, high pressure refrigerant flows through the copper tubes, fan cools the vapour refrigerant and changes it into liquid. This liquid refrigerant enters the expansion valve. The following is an image of a condenser:



Fig. 4.2.5: A condenser

Thermal Expansion Valve

The thermal expansion valve is a type of metering device. It consists of a spring loaded valve connected to a diaphragm. A thin, capillary tube connects the valve with a thermal bulb. The expansion valve restricts the flow of the regular temperature; high pressure refrigerant. The refrigerant expands as it passes through leading to a drop in its temperature and pressure as it leaves the valve and enters the evaporator thereby completing the refrigeration cycle. The following is an image of a thermal expansion valve:



Fig. 4.2.6: A thermal expansion valve

Unit 4.3: Refrigerant

Unit Objectives



At the end of this unit, you will be able to:

- 1. Define refrigerant
- 2. List the properties of refrigerant
- 3. Identify the types of refrigerants
- 4. Explain the environmental effects of refrigerants

4.3.1 Refrigerant

A refrigerant is a chemical compound that is used in the refrigeration cycle to transfer heat from one area to another. For ages, people have been using certain substances such as ice, water, brine and air as natural refrigerants to bring down the temperature of an area or substance. Refrigerants are used in all cooling devices such as refrigerators, freezers and air-conditioners. Most commonly used commercial refrigerants are chlorofluorocarbons (CFCs), ammonia, sulphur dioxide and non-halogenated hydrocarbons.

Refrigerants can be classified into two broad categories as shown in the following figure:

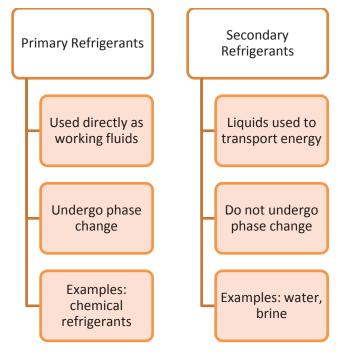


Fig. 4.3.1: Categories of refrigerants

Properties of Refrigerants

An ideal refrigerant should satisfy certain thermodynamic, chemical and physical properties to be able to be used safely and efficiently in refrigerating equipment. In addition, they should not pose any danger to health and property. The following figure shows the properties that an ideal refrigerant should possess:

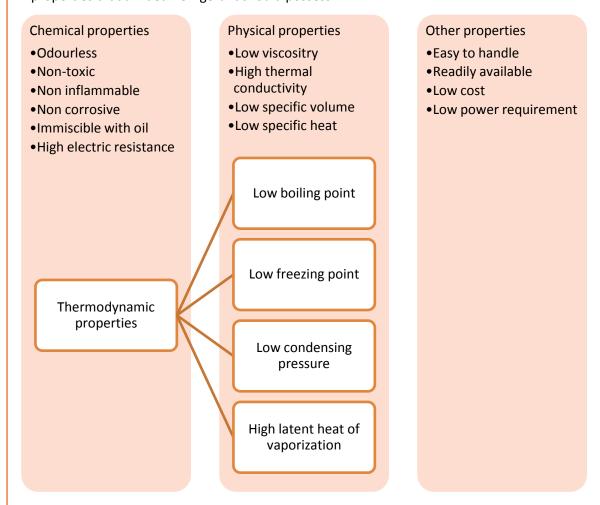


Fig. 4.3.2: Properties of refrigerants

Selection of Refrigerants

Even though a variety of refrigerants are available commercially now days, no one refrigerant has proved to be ideal under all circumstances. In some applications a non-toxic, non-inflammable refrigerant is a must but in other application these two characteristics might not be that important. Therefore, when selecting an appropriate refrigerant care must be taken to choose the one which has properties closest to ideal refrigerant for that application.

4.3.2 Types of Refrigerants

There are two main categories in which refrigerants are divided. These are shown in the following figure:

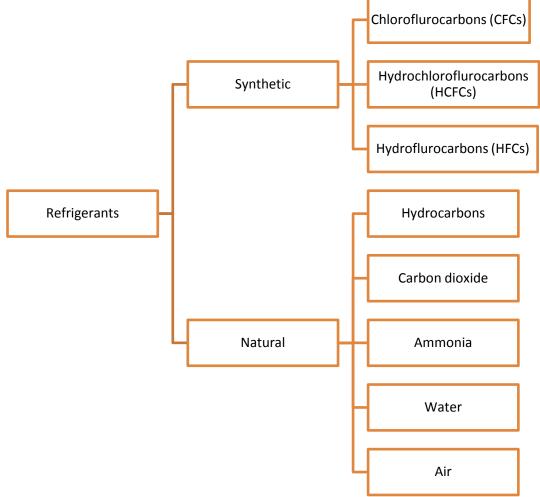


Fig. 4.3.3: Types of refrigerants

Synthetic Refrigerants

Synthetic Refrigerants are man-made refrigerants. They are very harmful to the environment and have led to ozone depletion and a rise in global warming.

Chlorofluorocarbons (CFCs)

CFC is an organic compound that is made up of Chlorine, Fluorine and Carbon. They were developed in the 1930s and were used in nearly all households, commercial, industrial and automotive industries. CFCs are chemically very stable. They are compatible with most substances. They are non-toxic, non-flammable and non-reactive. The most common CFC refrigerants are R11, R12, R13, R13B1, R113, R114, R500, R502 and R503. However, it was discovered that chlorine in CFC is damaging the ozone layer leading to its depletion. Therefore, their use has been prohibited since 1987 by the Montreal protocol.

The following image shows the molecular structure of CFC:




Fig. 4.3.4: Chlorofluorocarbon (CFC)

Hydrochlorofluorocarbons (HCFCs)

HCFC is an organic compound that is made up of Hydrogen, Chlorine, Fluorine and Carbon. They too have been widely used since 1930s in household, commercial, industrial and automotive industries. They are energy-efficient, low-in-toxicity and cost effective. They are less stable than CFCs but are equally compatible with most substances. The most common HCFC refrigerants are R22, R123 and R124. They are less damaging to the ozone layer and have helped to bring down the CFC consumption by 75%. However, their main drawback is that they are strong greenhouse gases. The following image shows the molecular structure of HCFC:




Fig. 4.3.5: Hydrochlorofluorocarbon (HCFC)

Hydrofluorocarbons (HFCs)

HFC is an organic compound that is made up of Hydrogen, Fluorine and Carbon. They have been widely used since 1990s in all applications that were initially using CFCs and HCFCs. HFCs are chemically very stable. They are compatible with most substances. The most common HFC refrigerants are R134a, R32, R125 and R143a. As they do not contain chlorine, they pose no damage to the ozone layer. However, their main drawback is that they are strong greenhouse gases.

The following image shows the molecular structure of HFC:



Fig. 4.3.6: Hydrofluorocarbon (HFC)

Natural Refrigerants

Natural Refrigerants are present in nature and do not need to be artificially created. As they have no impact either on ozone layer or on global warming, they are considered safe and cost-effective refrigerant.

Hydrocarbons (HCs)

HFC is an organic compound that is made up of Hydrogen and Carbon. They were widely used until 1930s and have been reapplied since 1990s. HCs are chemically very stable and are compatible with most substances. The most common HC refrigerants are R600A, R290, R1270 and their blends. They pose no damage to the ozone layer. The following image shows the molecular structure of HFC:




Fig. 4.3.7: Hydrocarbon (HC)

Ammonia (NH3, R717)

Ammonia is an organic compound that is made up of Hydrogen and Nitrogen. It has been widely used as refrigerant since 1800s and is at present used for commercial refrigeration and chillers. It is chemically stable but reacts with carbon dioxide, water or copper. It is very cost effective and easily available. It has no impact on ozone layer. The following image shows the molecular structure of ammonia:



Fig. 4.3.8: Ammonia

Carbon dioxide (CO2, R744)

Carbon dioxide is an organic compound that is made up of Carbon and Oxygen and has been widely used as a refrigerant in 1800s and then reapplied from 1990s. It is used in industrial refrigeration, cold storage and hot-water pumps. It is chemically very stable and compatible with most substances. It is non-inflammable and has low toxicity. It is very cost effective and easily available. It has no impact on ozone layer.

The following image shows the molecular structure of carbon dioxide:




Fig. 4.3.9: Carbon dioxide

The following table shows the properties of different types of refrigerants used in commercial applications:

Refrigerant		Description	Image
CFC	R12	 Known by Dupont brand name , Freon Colourless and odourless Non-inflammable, non-toxic, non-poisonous, non-corrosive and non-irritating Used with reciprocating, rotary and centrifugal compressors Has high ODP Phased out to be replaced by R134a Colour code: white 	Refrigerant 12
HCFC	R22	 Suitable for installations requiring low evaporating temperature Used with reciprocating, rotary and centrifugal compressors Non-inflammable, non- poisonous, non-corrosive and non-irritating Colour code: green 	Refrigerant 22
	R290	 Highest latent heat Largest vapour density Miscible in oil Compatible with copper Low molecular mass Low vapour pressure Saves up to 20% energy 	Refrigerant 290

HFC	R134a	 Eco-friendly Used as replacement for R12 Non-inflammable, non- toxic, non-corrosive Used with reciprocating, rotary, screw and centrifugal compressors Colour code: Light blue 	Refrigerant 134a
HC	R600a	 Most common refrigerant for refrigerators Colourless and odourless Inflammable Colour code: Orange 	Refrigerant 600a
HC Blends	R410a	 Blend of R32 and R125 Ozone friendly Does not contain chlorine Chemically stable Non-inflammable and non-poisonous Colour code: Pink 	Refrigerant 410A

Fig. 4.3.10: Properties of refrigerants

4.3.3 Environmental Impact of Refrigerants

The excessive use of refrigerating devices containing various types of refrigerants has led to a very adverse impact on the environment. The two major consequences are depletion of ozone layer and a rise in global warming.

Ozone Layer

Ozone is a naturally occurring molecule that consists of three oxygen atoms. The ozone molecules form a deep gaseous layer in the stratosphere of earth's upper atmosphere known as ozone layer. This ozone layer protects life on earth by absorbing harmful ultraviolet rays of the Sun and preventing them from entering the earth's atmosphere. These ultraviolet rays can cause disorders such as skin cancer, cataracts and can destroy cell organism, terrestrial plant life and human immune system.

UV protection by the ozone layer

The following image shows the how ozone layer provides UV protection:

Fig. 4.3.11: Ozone layer

Ozone Layer Depletion

Over the past few decades, an increase in UV_B radiation was observed. This was the result of damage to the ozone layer. It was found that the main cause of ozone layer depletion was increase in the level of chlorine and bromine gases in the stratosphere. These gases were released due to the production and emission of refrigerants such as CFCs and HCFCs which are now labelled as ozone-depleting substances (ODS).

When these ozone depleting substances reach the stratosphere, they get exposed to the ultraviolet rays. The UV rays cause the chlorine atom to break away from the CFC molecule. This free chlorine atom reacts with the ozone gas and displaces a free oxygen atom from the ozone molecule. The oxygen atom hits the chlorine monoxide molecule and frees another chlorine atom. Thus, the cycle repeats leading to the depletion of ozone layer. The following figure shows the process of ozone layer depletion:

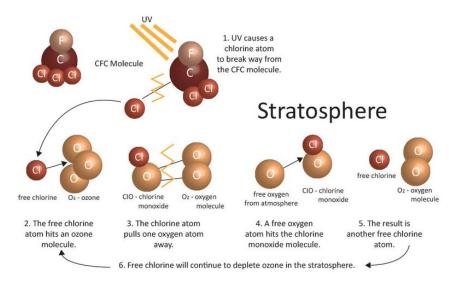


Fig. 4.3.12: Ozone layer depletion

Ozone layer depletion reduces ozone in the stratosphere but increases its presence in the lower atmosphere where it acts as a pollutant and a greenhouse gas. The depletion of ozone layer leads to global warming, which in turn leads to climatic changes around the world.

Global Warming

Global warming refers to the gradual but continuous increase in the temperature of earth's surface, oceans and atmosphere. When the rays of the sun reach the earth's surface, some are absorbed by the atmosphere, some are reflected from land and clouds and the rest are absorbed by the earth's surface. This heats up the earth's surface which then emits infrared radiation. Normally these radiations are absorbed by the atmosphere. However, when the concentration of air pollutants and certain gases known as greenhouse gases (GHG) increase in the atmosphere, they trap the harmful infrared radiations and warm up the atmosphere. This leads to global warming causing a change in the earth's climate.

Greenhouse Gases (GHG)

The main cause of global warming is the emission of greenhouse gases. A greenhouse gas is a gas that holds and traps heat in the atmosphere by absorbing infrared radiation. They remain in the atmosphere for a long period of time and are causing the planet to get hotter. The main greenhouse gases are carbon dioxide (CO2), methane (CH4), nitrous oxide (N2O), ozone (O3) and artificial chemicals such as CFCs as shown in the following figure:

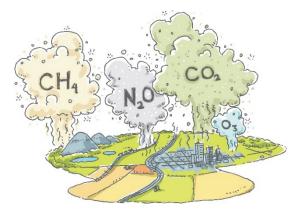


Fig. 4.3.13: Greenhouse gases

Greenhouse Effect

The greenhouse effect is the process of warming up of the earth's atmosphere as a result of trapping of heat by greenhouse gases. The greenhouse gases act like a blanket and allow the sunlight to escape but trap the heat within the atmosphere. This hot air causes the earth to heat up which in turn leads to global warming.

THE GREENHOUSE EFFECT

Sun

Atmosphere

Farth

The following figure shows the concept of the greenhouse effect:

Fig. 4.3.14: Greenhouse effect

Environmental Characteristics

Refrigerants are ranked according to their impact on the ozone layer (the Ozone Layer Depletion Potential, ODP) or as greenhouse gases (the Global Warming Potential, GWP). The following table shows the environmental characteristics of various refrigerants:

Refrigerant		ODP	GWP (100 years)
CFC	CFC 11	1	4000
CFC Blend	R502	0.33	5260
HCFCs	HCFC-22	0.555	1700
HFCs	HFC- 134A	0	1300
HCs	HC-290	0	3
HFC Blends	R404a	0	3260

Fig. 4.3.15: Environmental characteristics of refrigerants

Montreal Protocol

The harmful effect of ODS led to the signing of an international treaty in September 1987 known as the Montreal protocol. The main aim of the treaty was to take steps to protect the ozone layer by reducing and eventually banning global production of ozone damaging chemicals such as CFCs, HCFCs and halons. The following table shows the phase out schedule of the ODS:

ODS	Developed countries	Developing countries
CFCs	Phased out by 1995 end	Total phase out by 2010
HCFCs	Phased out by 2020 end	Total phase out by 2040
Halons	Phased out by 1993 end	Total phase out by 2010

Fig. 4.3.16: Phase out schedule of ODs

UNIT 4.4: Types of Refrigerators

Unit Objectives



At the end of this unit, you will be able to:

- 1. Identify different types of refrigerators
- 2. Compare Direct Cool (DC) and Frost-Free refrigerators
- 3. Describe the working of Peltier refrigerators

4.4.1 Types of Refrigerators

A refrigerator is one of the most essential appliances in the kitchen. There are many types of refrigerators that are available in the market today and it is very important to select the right type of refrigerator.

Refrigerators can be divided into two broad categories:

- Direct Cool
- Frost Free

The following figure shows the different types of refrigerators:

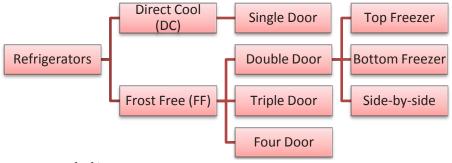


Fig. 4.4.1: Types of refrigerators

Direct Cool (DC)

The Direct Cool refrigerator works on the principle of vapour condensation and natural convection. They are single door refrigerators which need to be defrosted manually or semi-automatically.

The following figure shows a direct cool refrigerator:



Fig. 4.4.2: A Direct cool refrigerator

Frost Free

The Frost-Free refrigerators do not require manual defrosting. They contain a small element that melts the built up ice without interfering in the cooling cycle of the refrigerator. The following figure shows a frost-free refrigerator:



Fig. 4.4.3: A frost free Refrigerator

Top Freezer

The Top freezer has the freezer compartment on the top and the refrigerator at the bottom. It has a spacious design with wide shelves which allow easy access to items at the back. It is the most economical and energy efficient model.

The following figure shows a top freezer refrigerator:



Fig. 4.4.4: A top freezer refrigerator

Bottom Freezer

The bottom freezer has the refrigerator on the top and the freezer compartment at the bottom. It makes it easy to reach the food items in the refrigerator without needing to bend. The freezer section is either a door or a pull-out drawer. It is slightly expensive than the top freezer model.

The following figure shows a bottom freezer refrigerator:



Fig. 4.4.5: A bottom freezer refrigerator

Side-by-Side

The unit is divided vertically with the refrigerator and the freezer compartments parallel to each other. The doors of both compartments open from the middle. It provides easy access to both fresh and frozen foods. It is more expensive than the basic models.

The following figure shows a side-by-side refrigerator:



Fig.4.4.6: A side-by-side refrigerator

Triple Door / French Door

The French door features side-by-side refrigerator compartments and a bottom freezer. It is one of the most expensive models and is available in many designs. They are wider than the double-door models.

The following figure shows a French door refrigerator:



Fig. 4.4.7: A French door refrigerator

Four Door

The four door model is a variant of the French door one where the freezer compartment is also split in two.

The following figure shows a four door refrigerator:



Fig. 4.4.8: A four door refrigerator

4.4.2 Direct Cool Vs Frost Free refrigerators

The following figure lists the various differences between Direct Cool and Frost-Free refrigerators:

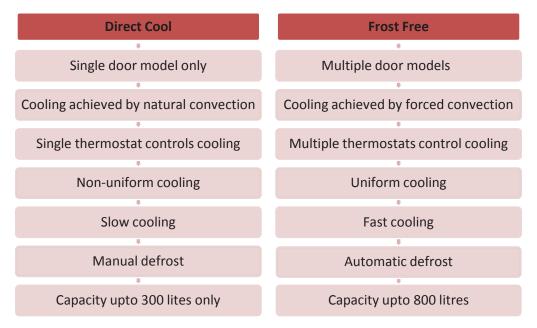


Fig. 4.4.9: Direct cool Vs frost free refrigerators

4.4.3 Peltier Refrigerator

The Peltier refrigerator is based on the principle of thermoelectric cooling and uses the Peltier effect to create a heat flux between two different types of conductors (a thermocouple). The thermocouple consists of an array of positive or negative (P/N) type semiconductors. This array is soldered between two ceramic plates, thermally parallel and electrically in series. When DC voltage is applied to the module, current flows and a temperature difference is created. The array absorbs heat from one surface and releases it to other surface. This results in one surface becoming cold and the other becoming hot. The following figure shows a typical thermoelectric module:

THERMOELECTRIC MODULE

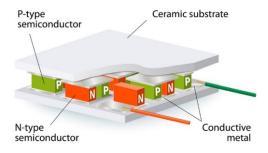


Fig. 4.4.10: Thermoelectric module of Peltier refrigerator

The Peltier refrigerator has a solid state active heat pump that transfers heat from one side of the device to another.

The following figure shows the circuit diagram of Peltier refrigerator:




Fig. 4.4.11: Circuit diagram of Peltier refrigerator

The Peltier refrigerator has certain advantages and disadvantages as shown by the following figure:

Advantages

- Environment friendly (No CFC)
- Light weight
- Portable
- No vibrations/ noise
- No moving parts
- •Can alternate between heating and cooling
- Excellent cooling

Disadvantages

- Less efficient
- •For low heat flux applications only
- Disspates limited amount of heat flux

Fig. 4.4.12: Advantages and disadvantages of Peltier refrigerator

UNIT 4.5: Safety Precautions, Policies and Procedures

Unit Objectives



At the end of this unit, you will be able to:

- 1. Explain the maintenance procedure to the customer
- 2. Identify the safety precautions

4.5.1 Maintenance of Refrigerators

A refrigerator is one of the most important and expensive appliances in a kitchen. To ensure that it runs well for years, it is essential to follow certain simple maintenance and cleaning procedures. Regular maintenance will keep it working at highest efficiency and lower the energy consumption.

The following table lists the checklist for routine maintenance of refrigerators:

Maintenance	Description
Cleaning the exterior	 Clean the exterior with soft wet cloth Avoid using soap or detergent
Cleaning the interior	 Remove all food items Remove drawers and shelves Mix ½ teaspoon baking soda in lukewarm water Dip a clean cloth in it Clean the interior with this solution Avoid using soap or detergent
Food Storage	 Store vegetables and fruits in the vegetable tray Avoid overstocking to ensure that air circulation is not blocked Store liquids in airtight containers Store all frozen foods in freezer

Thermostat position	 Use thermostat to vary the temperature inside the refrigerator Always set the thermostat as recommended in the user manual
Defrosting	 Remove all the stored items Remove the ice trays Defrost the refrigerator Wipe the refrigerator dry Leave the door open Make sure to defrost regularly

Fig. 4.5.1: Routine maintenance of refrigerators

In addition to the routine maintenance, it is vital to do preventive maintenance of refrigerators to prevent break downs.

The following table lists the checklist for preventive maintenance of refrigerators:

Maintenance	Description
Clean the condenser coils	 Pull the refrigerator out Use long-handle bristle brush Remove dust and dirt from the coils Use vacuum cleaner to blow away dust particles
Check door seal	 Ensure seals are free of food residue Mix ½ teaspoon baking soda in lukewarm water Dip a clean toothbrush in it Clean the door seals with this solution
Clean freezer vents	 Keep food packages away from the vent openings Clean the air return so that crumbs and twist ties don't clog them

Fig. 4.5.2: Preventive maintenance of refrigerants

Safety Precautions

It is critical to follow safety precautions while installing or servicing a refrigerator. Any negligence or carelessness can pose a threat to health and safety and cause personal injuries. The following figure represents the general guidelines to be followed while working with electrical systems:

Follow the correct procedures to ensure zero accidents at work.

Obey safety signs, stickers and tags on the equipment/devices.

Use an appropriate tool for the respective task.

Read labels and instructions given on the components.

Wear appropriate clothing and remove metal objects before working.

Use prescribed protective safety equipment only.

Follow electrical safety rules when working with electrical machinery/equipment.

Report all unsafe acts or unsafe conditions to the supervisor.

Fig 4.5.3: Safety guidelines

In addition to these general guidelines, few more safety precautions should be followed while installing or repairing refrigerators.

The following figure shows the safety precautions that should be followed while installing or repairing refrigerators:



Unplug the unit prior to service



Wear rubber gloves



Check current, voltage and capacity



Ensure water does not drip into electrical parts



Ensure that the power cord or plug is not damaged



Do not use multi plugs in the same socket

Fig 4.5.4: Safety precautions

UNIT 4.6: DC Refrigerator

Unit Objectives



At the end of this unit, you will be able to:

- 1. Explain the working of a DC refrigerator
- 2. Identify the compartments
- 3. Describe the working of different parts
- 4. Explain the wiring diagram

4.6.1 Features of Direct Cool Refrigerator

DC refrigerators are single door refrigerators having separate compartments within one unit. The top compartment is the freezer which stores frozen food. The middle compartment is the storage where food items are kept. The bottom compartment consists of vegetable drawers to store fresh vegetables and fruits.

The following image shows the compartments in DC refrigerator:

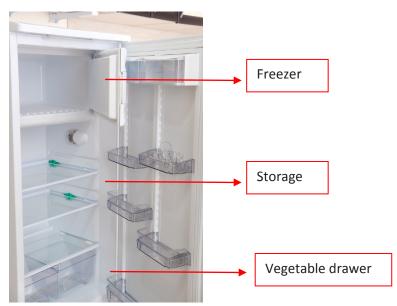


Fig 4.6.1: Compartments in a DC refrigerator

All the compartments are maintained at different temperatures according to their function and the food they store. The following table shows the functions and temperatures of the different compartments in DC refrigerator:

Compartment	Food stored		Temperature
Freezer		Frozen meat, fish, ice cream	-16 ⁰ C to -18 ⁰ C
Chiller		Milk, butter, cheese	1° C to 3° C
Refrigerator		Cooked food, cut fruits	3° C to 6° C
Vegetable drawer		Fruits and vegetables	6° C to 8° C
Door shelf		Water bottles, juices, eggs	8° C to 10° C

Fig 4.6.2: Functions and temperatures of compartments in a DC refrigerator

Working of DC Refrigerator

DC refrigerators are based on the principle of cooling through vapour condensation and natural convection. The air within the inner compartments of the DC refrigerator is hot and moist. This air rises up and comes in contact with the evaporator. The evaporator absorbs the heat and moisture from the hot air. As a result, the air in the freezer compartment becomes cold and dry. Being heavier, this cold air moves down and cools the remaining compartments. The cold air again pushes the hot air up. In this way, the cycle keeps on repeating till the set temperature is attained. The compressor then switches off. When the temperature rises again, the thermostat restarts.

The following image shows the refrigeration cycle inside a DC refrigerator:

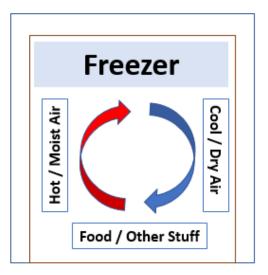


Fig 4.6.3: Working of a DC refrigerator

Components of DC Refrigerator

The following table shows the components inside a DC refrigerator:

Component	Description		
Drier	Absorbs moisture content in the sealed system and prevents the moisture from entering the capillary.		
Accumulator	 Located in the suction line between the evaporator and compressor Stores excess liquid refrigerant or oil that has not evaporated Designed to avoid damage to the compressor 		
Overload protector (OLP)	 Mounted in series with the common terminal of compressor Designed to protect the compressor from overload 		

Thermostat	 Regulates the temperature inside the refrigerator Controls the running and stopping time of the compressor 	
PTC Relay	Disconnects the power supply to the compressor when it reaches 80% of its speed	
Door Switch	Controls the operation of cabinet bulb	
Cabinet bulb	Glows when the refrigerator door opens	
Drain pipe	Connects the chill tray with the drain pan	
Drain pan	Collects the drain water	
Door gasket	 Located at the edges of the door Prevents flow of air from inside the refrigerator to outside and vice versa 	

Fig 4.6.4: Components of DC refrigerator

Defrosting DC Refrigerator

The evaporator absorbs the moisture from the air in the freezer compartment. When this moisture condenses, it results in the formation of frost on the evaporator. If the refrigerator door is opened frequently or if the humidity in air is more, it will lead to more frost. As ice is a bad conductor of heat, excess frost adversely impacts the heat transfer in the refrigerator. Therefore, to ensure efficient cooling, a DC refrigerator needs to be defrosted regularly. The following image shows frost formation in the freezer compartment of a DC refrigerator:



Fig 4.6.5: Frost formation in the freezer of DC refrigerator

Defrost Method

Press the default switch manually. The power supply to the compressor gets switched off automatically. The air inside the compartments starts to heat up making the frost on the evaporator melt. The defrosted water gets accumulated in a chill tray and is carried by a drain pipe to a drain pan. As soon as the temperature of evaporator reaches a pre-set value (zero-degree C), the thermostat restores the power to the compressor and the cooling cycle starts.

Before defrosting the refrigerator, remember to:

- Turn off the freezer
- Remove frozen items from the freezer

Wiring Diagram of DC Refrigerator

A wiring diagram represents the electrical circuit of an appliance. It depicts the power and signal connections between the devices and the components in an electrical circuit. This information is useful while installing or servicing a device.

The following figure shows the wiring diagram of a DC refrigerator with electronic controls (PCB):

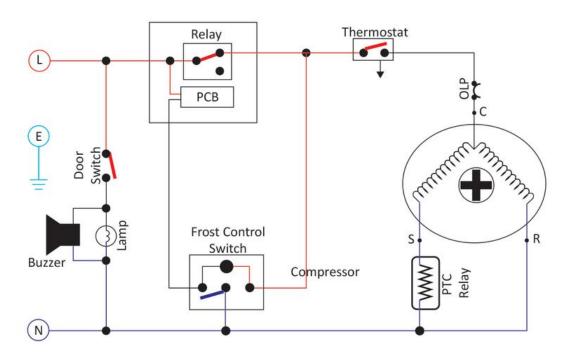


Fig 4.6.6: Wiring diagram of DC refrigerator with electronic controls

The following figure shows the wiring diagram of a DC refrigerator with timer for auto defrost:

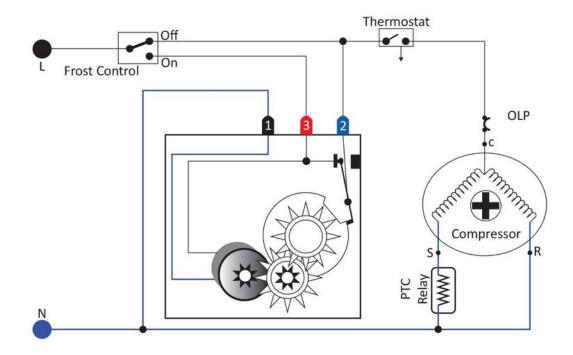


Fig 4.6.7: Wiring diagram of DC refrigerator with timer for auto defrost

UNIT 4.7 – FF Refrigerator

Unit Objectives



At the end of this unit, you will be able to:

- 1. Explain the working of FF refrigerator
- 2. Identify the compartments in FF refrigerator
- 3. Describe the working of different parts in FF refrigerator
- 4. Explain the wiring diagram

4.7.1 Features of Frost Free Refrigerator

FF refrigerators are multi-door units that that are based on the principle of auto-defrost technique. In FF refrigerators, the freezer and the refrigerator compartments open separately. This ensures that when one compartment is opened, there is no cooling loss in another. They are spacious and wider than the DC refrigerators.

The following image shows a typical FF refrigerator:



Fig 4.7.1: A typical FF refrigerator

The following table shows the different compartments in FF refrigerator:

Compartment	Food stored		Temperature
Freezer		Frozen meat, fish, ice cream	-16° C to -18° C
Chiller		Milk, butter, cheese	1° C to 3° C

Refrigerator top compartment	Dairy products, cooked meat/fish	2° C to 3° C
Refrigerator middle compartment	Cooked or raw vegetable or food	3° C to 6° C
Vegetable drawer	Fruits and vegetables	6° C to 8° C
Door shelf	Water bottles, juices, eggs	8° C to 10° C

Fig 4.7.2: Compartments in a FF refrigerator

Working of FF Refrigerator

FF refrigerators work on the principle of forced convection wherein a fan is used to force the heat transfer. The freezer and the refrigerator compartment are connected to each other to allow air to pass from the freezer to the refrigerator compartment. A damper regulates this flow of air. A blower fan generates forced air circulation to cool the compartments. The fan sucks in the hot air and pushes it through the evaporator fins. The evaporator fins are at subzero temperature and absorb heat and moisture from the hot air. The resulting cold, dry air is pushed to the freezer and the refrigerator compartments. This cycle continues till the preset temperature for both the compartments is achieved. An electrical thermostat regulates the temperature in the freezer/refrigerator compartments by switching the compressor on and off.

Components of FF Refrigerator

Some of the components of the FF refrigerator are similar to the DC refrigerator.

The components which differ are shown in the following table:

Component	Description
Evaporator fan motor	Drives the evaporator fan to facilitate the movement of air
Condenser fan	Sucks hot air from the condenser and throws it outside
Bi-metal thermostat	 Contains a bi-metal coil that contracts when cold and expands when heated Fixed in the evaporator Cuts off the defrost heater after defrosting is over
Thermal fuse	 Protects the freezer compartment from damage Fixed in the evaporator
Defrost timer	Automatically starts the defrost timer
Damper thermostat	 Non-electrical device Regulates the temperature inside the refrigerator
Defrost heater	Melts the frost formed in the freezer
Door switch	Controls the operation of refrigerator lamp

Fig 4.7.3: Components of FF refrigerator

Defrosting FF Refrigerator

The defrost system of a FF refrigerator consists of the defrost timer, heater and thermostat. The defrost timer is the most important component of the defrost system. It is a motorized device with the defrost heater circuit on one end and the cooling system on the other. It opens and closes these contacts at pre-set intervals such that when one of the contacts is switched on, the other is switched off.

The following image shows a typical defrost cycle:

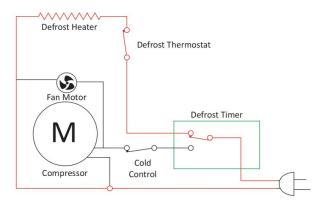


Fig 4.7.4: Defrost cycle of a FF refrigerator

The defrost timer automatically starts the defrost cycle after an interval of eight hours of compressor ON time. The defrost heater, located beneath the evaporator, starts melting the frost around the evaporator coils. The melted water flows out of a duct into a drain pan located on top of the compressor. The heat from the compressor evaporates the accumulated water. A soon as the frost is melted, the temperature of the evaporator coil increases due to the heat. The bi-metal sensor mounted on the evaporator coil senses the increase in temperature and turns off the heater.

Wiring Diagram of FF Refrigerator

A wiring diagram uses symbols to give information about the arrangement and the relative position of the components of an electrical circuit. It helps in understanding and troubleshooting problems by ensuring that all the components are present, and all the connection have been made.

The following figure shows the wiring diagram of a FF refrigerator with manual controls:

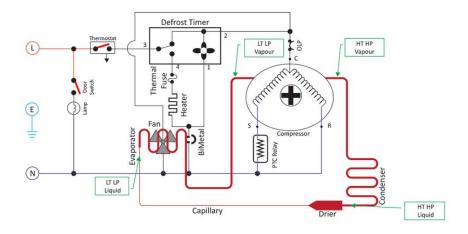


Fig 4.7.5: Wiring diagram of a FF refrigerator with manual controls

The following figure shows the wiring diagram of a FF refrigerator with electronic controls (PCB):

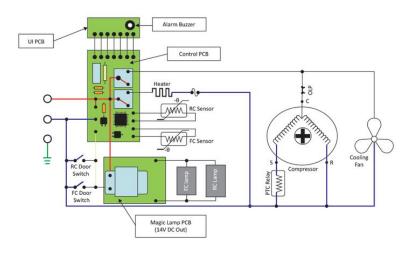


Fig 4.7.6: Wiring diagram of a FF Refrigerator with electronic controls

UNIT 4.8: Install DC & FF Refrigerator

Unit Objectives



At the end of this unit, you will be able to:

- 1. Explain the site requirements for installation
- 2. Perform installation of DC/FF refrigerator
- 3. Explain the steps involved in test run
- 4. Demonstrate and explain the features

4.8.1 Site Requirements for Installation

The first step of an installation process is to conduct a site survey and ensure that it meets all the requirements. The successful operation of a refrigerator is dependent on proper installation. The selected site should comply with all the safety codes and should not interfere with normal movement of people.

The following figure shows the site requirements of installing DC or FF refrigerator:


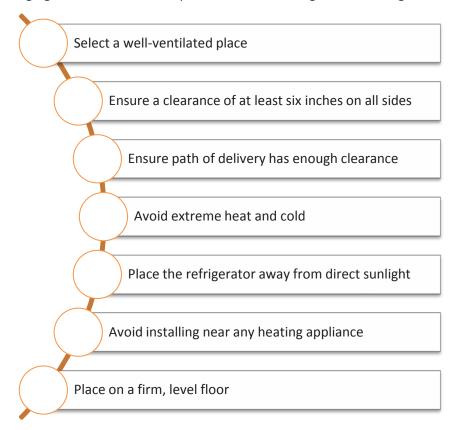


Fig 4.8.1: Site requirements

After checking the site requirements, the next step is to check the power supply at the location site.

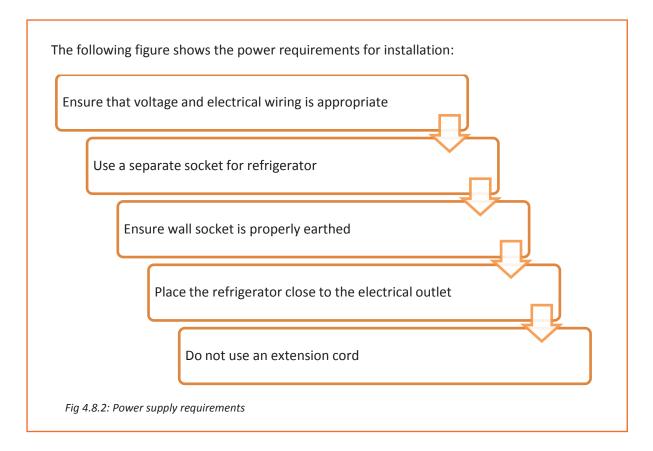

4.8.2 Installation Process

The installation process consists of transporting the unit from the delivery truck to the location, unpacking the unit, disposing the packing material and installing the refrigerator at the designated place.

Transporting Refrigerator

The refrigerator is an expensive electrical device. It should be handled with care during transportation.

The following figure shows the precautions that should be taken when transporting a refrigerator:



Fig 4.8.3: Transporting precautions

Unpacking Refrigerator

To protect the refrigerator from any kind of damage, it is properly packed and delivered. Once it is transported from the delivery truck, it needs to be carefully unpacked.


The following figure shows the tools that are needed for unpacking and handling a refrigerator:







Fig 4.8.4: Tools used in handling and unpacking

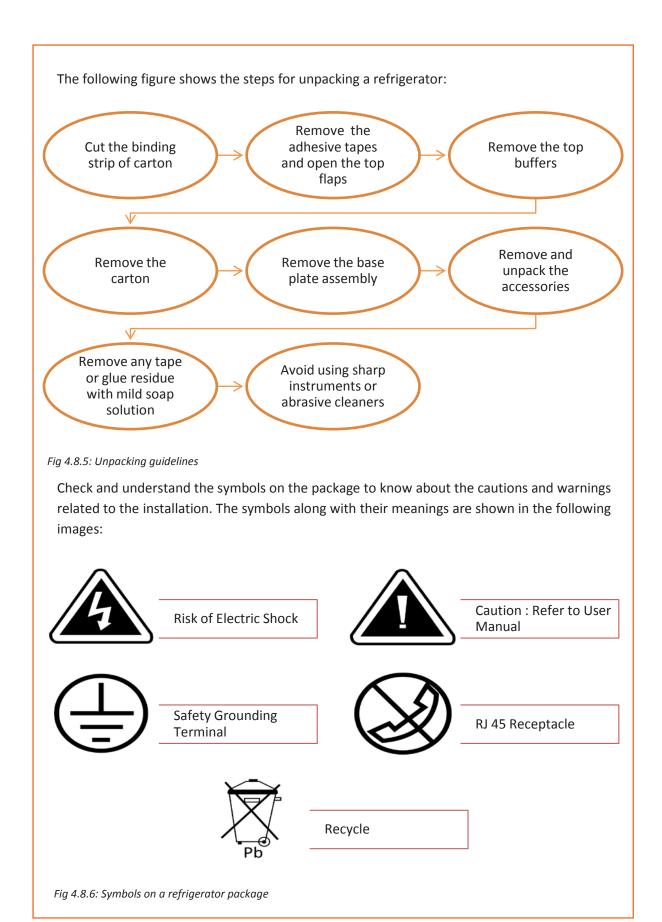

Disposing Packing Material

After the refrigerator has been unpacked, it is important to dispose of the packaging material properly. Most of the packaging materials are nowadays made of recyclable materials. Avoid disposing the packaging materials with domestic waste. Place them in recycling bin. Dispose the non-recyclable materials such as Styrofoam in proper disposal locations.





Fig 4.8.7: Disposing packing material

Installing the Refrigerator

Once the work area has been cleaned, inspect the refrigerator for any damage to the cabinet or the sealed system. Lift the refrigerator gently and place it in its proper position. Level the refrigerator properly with the help of the adjustable legs to ensure that it stands firm on the ground. Keep the front end slightly higher than the rear end to help in door closing. Fit all the accessories in their proper place.

Connecting Electric Supply

Before plugging-in the refrigerator, check the power supply with the help of a voltmeter. If the voltage is below 170V or above 250V, advise the customer to install voltage stabilizer. This will safeguard the sealed system from any possible damage due to voltage fluctuation.

The following figure shows the steps to connect the electric supply:



Check the power supply with the help of a voltmeter



Check the position of phase, neutral and earth in the supply socket and the connections in three pin plug



Connect the plug to the supply socket and switch ON

Fig 4.8.8: Connecting electric supply

The thermostat should be switched on to normal position as shown in the following image:



Fig 4.8.8: Thermostat in normal

It takes two to three hours for the temperature in the refrigerator to stabilize. Observe the compressor and fan for some time.

Complete the Documentation

After completing the installation at the site, the technician should complete the documentation to record the details related to installation. Along with completing the documentation, the field technician should tell the customer about some do's and don'ts for using the refrigerator such as, keep the area near the product clean and dry. The field technician should also tell the customer about important pages to be referred to from the owner's manual.

The following figure shows the installation documents:

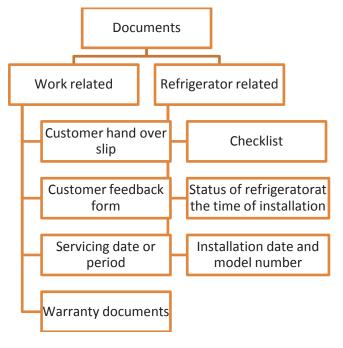


Fig 4.8.9: Installation documents

Interact with Supervisor or Superior

A technician must communicate with the supervisor in case they face problem with the installation process. If there is any damage found in the product, the supervisor needs to be informed immediately. In addition, the technician needs to report to the senior about the task status and submit the documents collected from the customer's site. Listen carefully to the senior if he/she has any queries or any suggestions.

Achieve Productivity and Quality

To achieve productivity and quality as per company standards follow the working instructions given by the company.

The following figure lists some ways to achieve productivity and quality:



Fig 4.8.10: Ways to achieve productivity and quality

UNIT 4.9: Repair DC and FF refrigerators

Unit Objectives



At the end of this unit, you will be able to:

1. Repair DC & FF refrigerator

4.9.1 Break-Downs -

A refrigerator is one of the few appliances that work continuously, day in and day out. It is a vital part of a customer's daily life. A breakdown or even a minor technical problem in the refrigerator can bring his/her life to a halt. An RACW technician should have the knowledge and skill to repair all kinds of refrigerators. He should be able to diagnose and troubleshoot the problem. He should carry out repairs according to the requirements of that particular model.

It is very important for a technician to correctly identify the fault in the refrigerator. Wrong identification of fault will lead to waste of time and money and it can also cause damage to the equipment.

The following figure shows the steps for identifying the fault:

Understand the symptoms and identify the fault

Replace or repair the faulty module

Check the functionality of the repaired unit

Achieve productivity and quality

Fig 4.9.1: Steps for identifying the fault

Component Check Guide

It is very important to have the knowledge and skill to correctly perform a check on individual components when they are out of circuit to ensure that they are working properly.

The following table shows the check guide for various components:

S No.	Part name	Checking method	Approximate value
1.	OLP	Continuity between terminals	0 ohm -> continuity
			Cut In: 65 C
			Cut Off: 125 C
2.	Bi-metal	Continuity between terminals	Open -> no
			continuity
			Cut In: -5 C
			Cut Off: +15 C
3.	Thermostat	Continuity between terminals in	Open -> no
		Switch OFF condition	continuity
		Continuity between terminals in	0 ohm -> continuity
		Switch ON condition	
4.	Defrost timer	Keep timer knob at cooling cycle,	0 ohm
		Check continuity between 2 and 3	
		Keep timer knob at cooling cycle,	Open
		Check continuity between 4 and 3	
		Rotate timer knob to defrost cycle,	Open
		Check continuity between 2 and 3	
		Rotate timer knob to defrost cycle,	Open
		Check continuity between 4 and 3	
5.	Temperature sensor	Check resistance between	2 - 3 ohm
		terminals	
6.	PTC relay	Check resistance between	10 - 33 ohm
		terminals	
7.	Heater	Check resistance between	300 - 370 ohm
		terminals	
8.	Fan motor	Check resistance between	0.3 – 0.35 k ohm
		terminals	

Fig 4.9.2: Check guide for components

Troubleshooting Guide

The following table represents the common problems in the working of a refrigerator along with their potential causes and solutions:

Fault/Symptoms	Potential Causes	Recommended Solutions
Excess frost in freezer	Defective bi-metal or thermal fuse or defrost heater	 Check the continuity of each component Replace defective component
Refrigerator temperature not maintained	Improper installation	 Check installation Check ventilation
Condensation in refrigerator compartment	Air leakage	 Check for leakage Do proper insulation
Improper cooling	Gas leakage	 Check for gas leakage Repair the leakage Refill refrigerant
Frequent compressor tripping	Defective condenser fan motor	 Check condenser fan motor Replace defective motor
Fan runs even when door is open	Defective door switch	 Check door switch Replace if defective
Internal bulb does not switch ON	Defective bulb	Replace light bulb
No cooling in refrigerator	Defective sealed system	Refer to unit on sealed system
Refrigerator unit not working	Fuse blown	 Check fuse Replace if defective
	Defective thermostat	 Short thermostat connection Check if refrigerator working If yes, repair/replace thermostat

Refrigerator unit not humming	Low voltage	 Check voltage If not within range, connect stabilizer
	Defective relay	 Short relay connection Check if refrigerator working If yes, repair/replace relay
Refrigerator running continuously	Defective thermostat	 Short thermostat connection Check if refrigerator working If yes, repair/replace thermostat
Refrigerator very noise	Improper installation	 Check installation Check foundation If loose, tighten base screws
Refrigerator compartment very	Improper thermostat adjustment	 Check thermostat Replace if defective
hot	Defective door seals	 Check door gasket Replace if defective
	Defective fan motor	 Check continuity between fan and switch Check fan and switch Replace the defective part
	No air circulation	 Check air circulation Check for any restriction in air path
Excessive cold in food compartment	Defective damper	 Check damper If blocked, remove ice and dry it Check if drain pipe is choked
Compressor not working	Low voltage	Check voltage If not within range, install stabilizer
	Defective compressor	 Check compressor Replace if defective
	Defective overload protector	 Check continuity of overload protector Replace if defective
	Defective start relay	 Check resistance of relay Replace if abnormal

Compressor motor	Excessive load	1.	Reduce load
·	Execusive road		Neddec Iodd
heats up	Low voltage	1.	Check voltage
		2.	If not within range, install stabilizer
Compressor motor	Low voltage	1.	Check voltage
stop intermittently	Low voltage	2.	If not within range, install stabilizer
	Improper motor winding	1.	Check resistance of motor winding
		2.	Replace if abnormal
Current leakage	Improper grounding	1.	Check grounding of all
		2.	components Replace if ungrounded
	Earth wire removed	1.	Connect earth wire to the body


Fig 4.9.3: Common problems of refrigerator

Replacing Dysfunctional Module

In case the technician is unable to repair the components or fix the fault, or if the components cannot be replaced at customer's site, then the faulty module/component is sent to the service centre. The field technician then collects the functional module from the service centre and replaces the defective component at the customer's site.

Confirming Functionality of the Repaired Module

After the dysfunctional module has been repaired or replaced, check the new module with testing equipment such as multimeter and ammeter. This is done to ensure that the module is working fine with the other parts of the refrigerator.

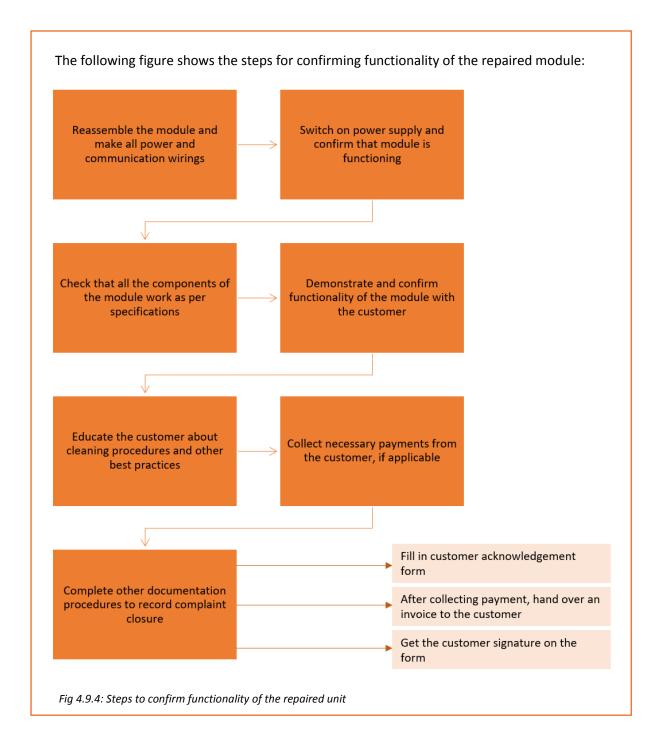

Achieving Productivity and Quality as per Company's Norms

To achieve productivity and quality as per company standards, a technician should follow the working instructions given by the company.

The following figure shows the steps for achieving productivity and quality practise the following:

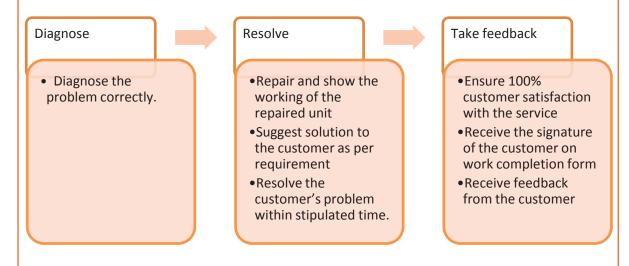


Fig 4.9.5: Work flow to achieve productivity and quality in repairing

UNIT 4.10: Sealed System

Unit Objectives



At the end of this unit, you will be able to:

- 1. Define sealed system
- 2. Perform sealed system repairs

4.10.1 Refrigerator Sealed System

A sealed system essentially means any system whose working is concealed and is closed to the atmosphere. A refrigerator sealed system is the system in which the cooling takes place. It consists of evaporator, condenser, compressor, suction tube and metering device. All the parts containing refrigerant are sealed with brazing or welding and have capped valves and service ports to enable repair.

The following figure shows the components of a sealed system:

Typical refrigeration cycle

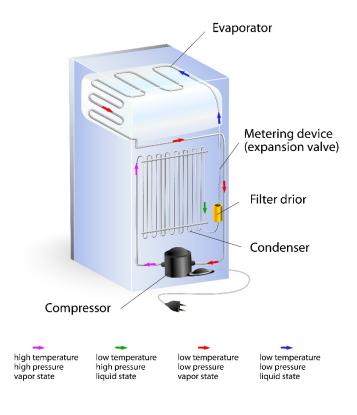


Fig 4.10.1: Components of a sealed system

Advantages of Sealed System

The individual components and pipes in a sealed system have only brazed connections; they do not have joints. The entire pipeline is in a single piece. The following figure shows the advantages of sealed system:

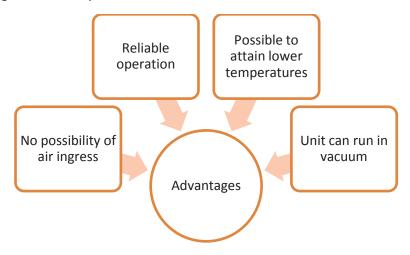


Fig 4.10.2: Advantages of a sealed system

4.10.2 Sealed System Repairs -

Proper repair of sealed system is dependent foremost upon a thorough understanding of the normal operating procedures, the types of failures that can occur in a sealed system and the correct diagnosis of the problem.

The following figure shows the types of failures that can necessitate repairs:



Fig 4.10.3: Types of failures

Failure of Compressor

The inflow and outflow of refrigerant in a compressor is regulated by two valves. A defective valve leads to inefficiency and subsequently a failure of compressor. The compressor is unable to maintain correct pressure differential needed for proper evaporation and condensation of refrigerant.

Blockage in Refrigerant Flow

The system must be free of any contaminants or moisture. Moisture is especially very harmful to the system. Water mixes with the refrigerant and forms salt and sludge. These salts and debris block the flow of refrigerant through the capillary tube.

Undercharge/Overcharge of Refrigerant

The system should be charged properly with the factory recommended refrigerant. It is highly unlikely for a unit to leave the factory with incorrect charge. Undercharge or overcharge of refrigerant is usually a result of poor system processing after repairs. It occurs when a unit is incorrectly charged after performing repair. Undercharge reduces the system's ability to absorb heat and overcharge has an adverse impact on the cooling efficiency as well as on power consumption.

Once the problem has been isolated, appropriate repairs can be undertaken. The following figure shows the prerequisites for a successful repair:

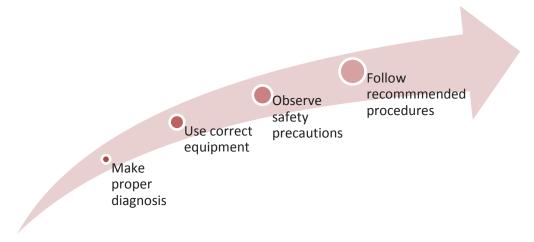


Fig 4.10.4: Prerequisites for successful repair

Sealed system repair consists of specific steps that need to be followed. The following figure shows the steps of sealed system repair:

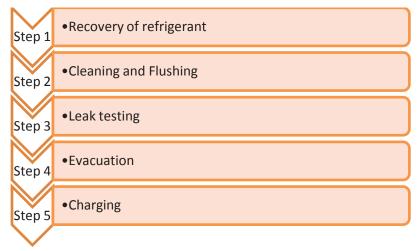


Fig 4.10.5: Steps of sealed system repair

Recovery of Refrigerant

Recovery of a refrigerant refers to the process of removing a refrigerant from a system and storing it in a recovery cylinder. A recovery cylinder is different from the conventional cylinder in two ways. First, the cylinder valve has the refrigerant filling port enabled and secondly, its upper part is painted yellow to mark it as a recovery cylinder. There are three different methods of recovering a refrigerant, as shown in the following figure:


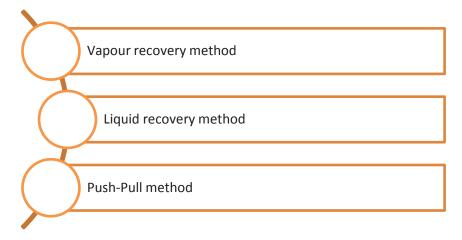



Fig 4.10.6: Methods of refrigerant recovery

Vapour Recovery Method

It is the most common method of refrigerant recovery. The refrigerant which is in vapour form is drawn into the recovery system from the refrigeration unit. It passes through the compressor to the condenser. The gas cools down to liquid and is stored in the recovery cylinder.

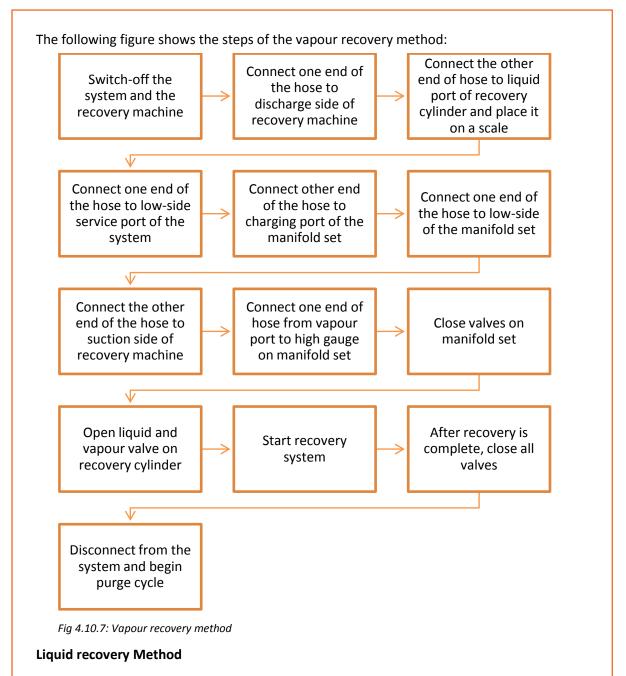


This method is preferred when the refrigerant has to be recovered from oil-less compressors having constant-pressure valves. The recovery method is similar to the vapour recovery method with the difference that it enables liquid refrigerant to be recovered.

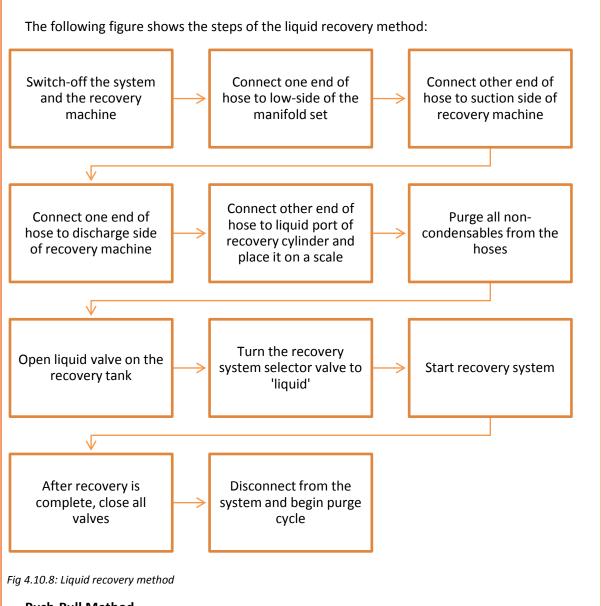

Push-Pull Method

This method is used to recover bulk liquid from a system. The recovery machine creates potential difference to siphon the refrigerant from one tank to another. The recovery unit pulls vapour from the recovery cylinder. This produces a high-pressure gas that pushes the liquid out of the system into the recovery cylinder.

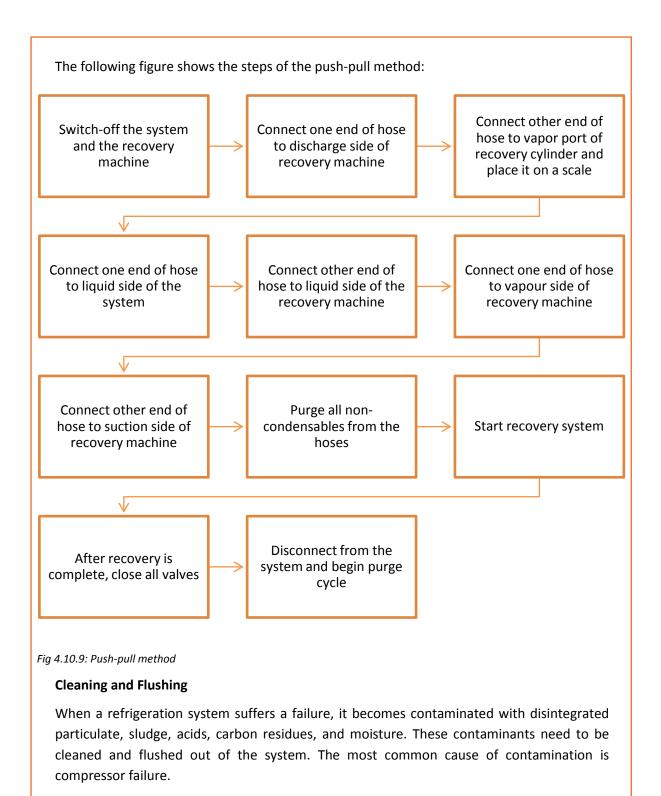

The following figure shows the guidelines that must be followed when flushing a system:

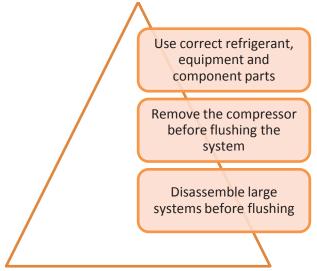


Fig 4.10.10: Guidelines for flushing system

It is very important to use correct equipment, ensure that it is in good working condition and undertake periodic and regular maintenance of the tools.

The following figure shows the equipment required for flushing a system:

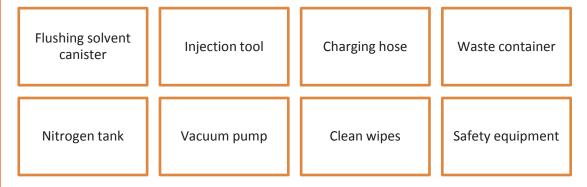


Fig 4.10.11: Equipment for flushing system

Before starting the flushing operation, confirm the availability of all required tools and equipment.

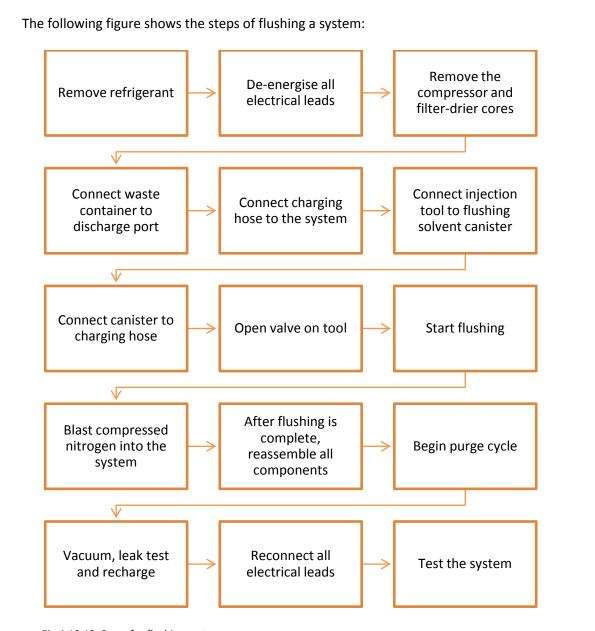


Fig 4.10.12: Steps for flushing system

Leak Testing

The refrigerators can operate properly only with a fixed charge of refrigerant. If it is diagnosed during troubleshooting that the refrigerant is insufficient, then the system needs to be checked for leaks. Theses leaks are then repaired, and the system is recharged with refrigerant.

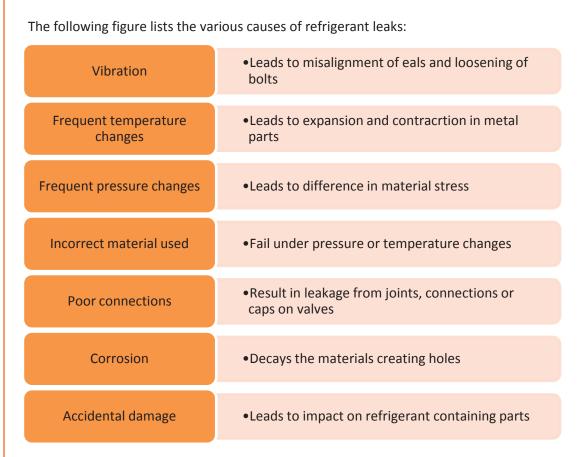


Fig 4.10.13: Causes of refrigerant leaks

Once the possibility of leak is diagnosed, it is critical to check the whole system for multiple leaks and mark them for repair. Leak detection is carried out manually by the technician to identify possible leaks.

The following figure shows the methods for leak detection:

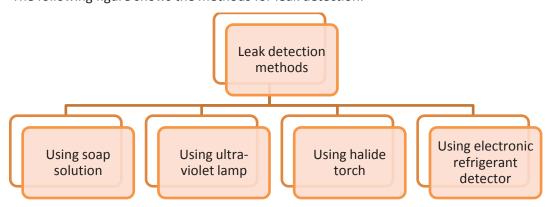


Fig 4.10.14: Methods of leak detection

Using Soap Solution

It is the most effective and economical method used by technicians to detect leakage. A soap solution is applied to joints, connections and fittings while the system is running. The appearance of bubbles confirms leakage.

The following image shows leak detection using soap solution:

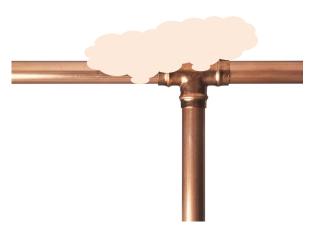


Fig 4.10.15: Leak detection using soap solution

Using Ultra-Violet Lamp

In case of large refrigeration systems, it is difficult to access all joints and connections. So, it is not possible to use soap solution or electronic detector to check for leakage. In such situations, ultra-violet lamp is used. An additive dye is added to the refrigerant. When a ultra-violet lamp is pointed, the leak glows in yellow-green colour.

The following image shows leak detection using ultra-violet lamp:



Fig 4.10.16: Leak detection using ultra-violet lamp

Using Halide Torch

The halide torch is used to detect leakage of CFCs and HCFCs. It contains a copper catalyst over which the refrigerant is drawn with the help of a blue flame. When the refrigerant burns over the copper catalyst, the chlorine in it reacts and the colour of the flame changes to green. It does not work in case of refrigerants such as HFCs which do not contain chlorine.

The following image shows a halide torch:



Fig 4.10.17: A halide torch

Using Electronic Refrigerant Detector

An electronic refrigerant detector is a battery or AC powered device containing an element sensitive to a particular chemical component in the refrigerant. As it approaches the source of leak, the audible or visible signal increases in frequency and intensity.

The following image shows leak detection using electronic refrigerant detector:



Fig 4.10.17: Leak detection using electronic refrigerant detector

Evacuation

Evacuation refers to the process of removing vapours, fluids and non-condensable gases such as air and nitrogen from the refrigeration system.

The following figure shows the equipment needed for evacuating a system:



Fig 4.10.18: Equipment for evacuating a system

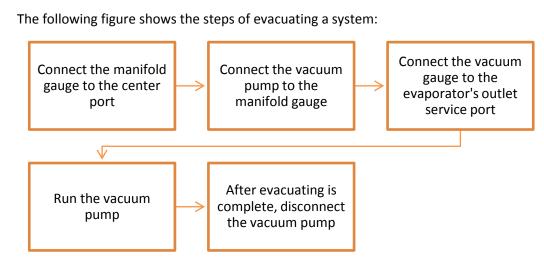


Fig 4.10.19: Steps for evacuating a system

Charging

Every refrigeration system needs an optimum level of refrigerant to function efficiently. When the level of refrigerant drops, it needs to be filled-up. Charging refers to the process of adding the refrigerant in proper quantity to a refrigeration system.

The following figure shows the steps of charging a system:

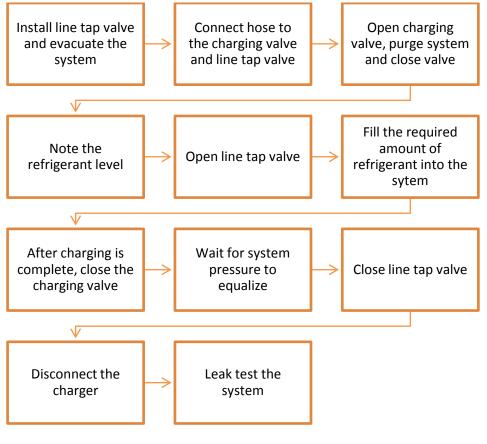


Fig 4.10.20: Steps for charging a system

UNIT 4.11: Copper Tube Processing

Unit Objectives 6



At the end of this unit, you will be able to:

- 1. Perform tube cutting and bending
- 2. Perform tube deburring and flaring
- 3. Perform tube brazing

4.11.1 Copper Tubes

Initially, the condenser coils were made of aluminium as it was cheap and had high transfer properties. However, it was noticed that it requires high maintenance. It was not possible to repair aluminium tubes; they needed to be replaced every time. It was replaced by copper. The following figure shows the reasons for replacing aluminium with copper:

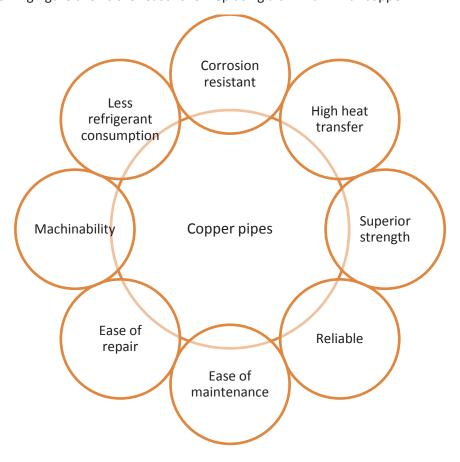


Fig 4.11.1: Advantages of copper pipes

Tube Cutting

A copper tube should always be cut with a tube cutter, a tool built specifically for that purpose.

The following figure shows the steps of cutting a copper tube:

Step No.	Task	Image
1.	Insert the copper tube in the tube cutter	
2.	Tighten the blade so that it fits snugly	
3.	Turn the cutter a few times till a groove is cut in the circumference of the tube	
4.	Align the groove with the blade and twist till the tube is cut	

Fig 4.11.2: Steps of cutting a copper tube

Tube Bending

A copper tube should always be bent with a tube bender, a tool built specifically for that purpose.

The following figure shows the steps of bending a copper tube:

Step No.	Task	Image
1.	Insert the copper tube in the wheel groove of the tube bender	
2.	Place the tube holding clip over the tube and bring the handle down	
3.	Pull both the handles towards each other in a smooth motion to bend the tube	
4.	Remove the bent tube and release tube holding clip	

Fig 4.11.3: Tube bending

Tube Deburring

When a copper tube is cut, it leaves some burrs behind. Burrs are metal shavings inside the wall of the tube. They need to be removed as they can cause leakage in joints and connections. Burrs are removed with the help of a burr remover, a tool built specifically for that purpose.

The following figure shows the steps of deburring a copper tube:

Step No.	Task	Image
1.	Insert the blade of the deburring tool at the edge of the tube	
2.	Rotate the blade around the walls of the tube shaving off the burrs.	

Fig 4.11.4: Tube deburring

Tube Flaring

Flaring is the process of joining two copper tubes mechanically. A copper tube should always be flared with a tube flarer, a tool built specifically for that purpose.

The following figure shows the steps of bending a copper tube:

Step No.	Task	Image
1.	Cut the desired length of the tube	
2.	Remove internal burrs with a deburrer	

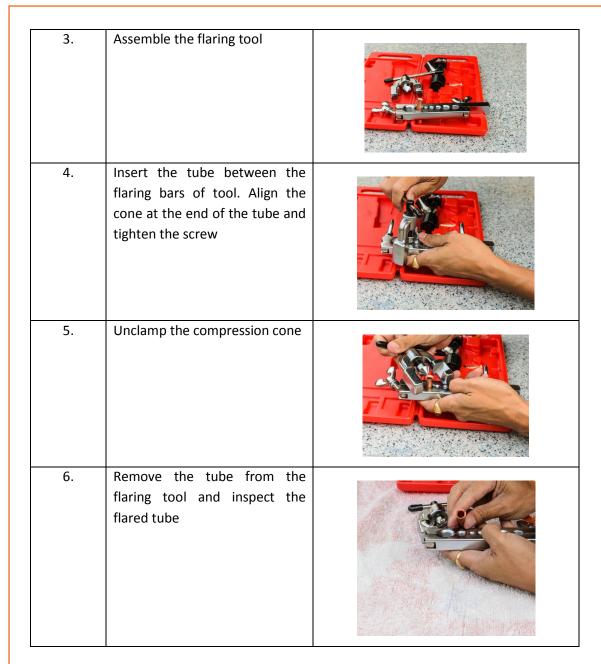


Fig 4.11.5: Tube flaring

Tube Brazing

Brazing is the process of joining two metals by filling the joint with a different metal, melted at very high temperature. The filler or the brazing rod is melted by the heat of the metals rather than the flame.

The following figure shows the most commonly used brazing techniques:

Output

Fig 4.11.6: Brazing techniques

The following figure shows the steps of brazing a copper tube:

Step No.	Task	Image
1.	Cut the desired length of the tube	
2.	Remove internal burrs with a deburrer	
3.	Assemble the tubes and the fitting. Purge residues out of tubes before brazing	

4.	Apply uniform heat to both the tubes and the fitting	
5.	Apply the filler material	
6.	Complete the joint evenly and remove heat	

Fig 4.11.7: Brazing techniques











5. Air Conditioners

Unit 5.1 – Basic Concepts of Air Conditioners (ACs)

Unit 5.2 – Working and Installation of Window ACs

Unit 5.3 – Servicing Window ACs

Unit 5.4 – Installing Split ACs

Unit 5.5 – Servicing Split ACs



Key Learning Outcomes

At the end of this module, you will be able to:

- 1. Define the factors, comfort zone and heat load of ACs
- 2. Identify the different parts and working of Window ACs
- 3. Follow safety precautions for installation of Window ACs
- 4. Test-run a Window AC
- 5. Describe wiring diagrams for Window ACs
- 6. Test electronic components of Window ACs
- 7. Service and repair Window ACs
- 8. Identify the different parts and working of Split ACs
- 9. Follow safety precautions for installation of Split ACs
- 10. Test-run a Split AC
- 11. Describe wiring diagrams for Split ACs
- 12. Test electronic components of Split ACs

UNIT 5.1: Basic Concepts of Air Conditioners (ACs)

Unit Objectives



At the end of this unit, you will be able to:

- 1. Define the factors for air conditioning
- 2. Define heat load and comfort zone of ACs
- 3. Describe the types of ACs

The main objective of having a confined space air conditioned is to make it comfortable for its occupants. This means making the indoors cooler or warmer irrespective of the heat or cold outside. The basic principle at which AC works is similar to a refrigerator, except the AC does not confine the coolness inside its unit but spreads it outside the unit into the room using a fan. The refrigeration cycle of ACs is also similar to that of refrigerators using the same principles and components.

5.1.1 Factors for Air Conditioning

Air conditioning typically means modifying (cooling or heating) the air inside a closed environment. This modification is affected by four factors, as shown in the following diagram:

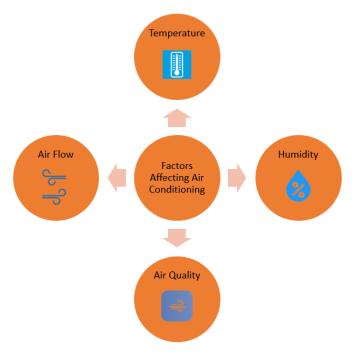


Fig. 5.1.1: Factors affecting air conditioning

The preceding factors decide the working of the ACs as well as how effective the ACs would be in that closed environment.

For example, typically, ACs should lower the temperature in summers and increase the temperature in winters for a closed room or space. The decrease in temperature is done by removing the humidity and heat that is generated by the environment and living beings (such as humans and their pets) existing in that environment. ACs should also work to improve the air quality, by removing odour and dust particles suspended in the air due to heat. Lastly, ACs need to ensure that there is proper air movement and circulation to avoid any suffocation due to air modification.

5.1.2 Heat Loads and Comfort Zones

Any physical activity, running home or commercial appliances, lighting, sun light/rays, open windows and other factors, which contribute to heat generation in a confined space or room is called heat load, as shown in the following image:

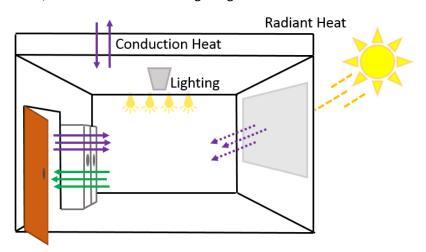


Fig. 5.1.2: Heat loads

Typically, the following factors in a home or office environment contribute to the heat load:

- Area of the space
- Running appliances (such as computers)
- Entry area for sun rays/light, such as windows, ceilings and so on
- People
- Activity/movement in the room, such as moving furniture, frequent opening of the door/windows and so on
- Artificial light used to illuminate the room

The capacity of ACs needed to cool the room/space, depends on the preceding factors. Higher is the number and intensity of these factors, more is the capacity of the AC needed to cool the room.

The capacity of ACs is measured in terms of ton, which means the amount of heat that an air conditioner can remove from a confined space within an hour.

Comfort zone is achieved when the internal conditions, air and environment, of a room or closed space is controlled to maintain a comfortable temperature for the occupants irrespective of the outdoor weather or temperature, as shown in the following image:



Fig. 5.1.3: Comfort zone

5.1.3 Types of ACs

There are primarily two types of ACs used in a home and office environment:

• Window ACs, as shown in the folloiwng image:




Fig. 5.1.4: Window AC

• Split ACs, as shown in the folloiwng image:






Fig. 5.1.5: Split AC

The working of the ACs, window or split used in homes or offices, is shown in the following diagram:

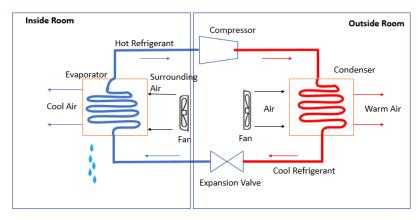


Fig. 5.1.6: Working of AC

The ACs shown in the preceding images work on a principle of reverse cycle or heat pumps. They work by taking the heat from the air outside and transfering it into a closed space. These ACs use a refrigerant to cool the air that is being transferred inside. An additional feature that these ACs may have is to filter the air inside.

Every AC contains a compressor inside its unit that is used for compressing and pumping the refrigerant gas. The following figure shows the steps of a refrigeration cycle:

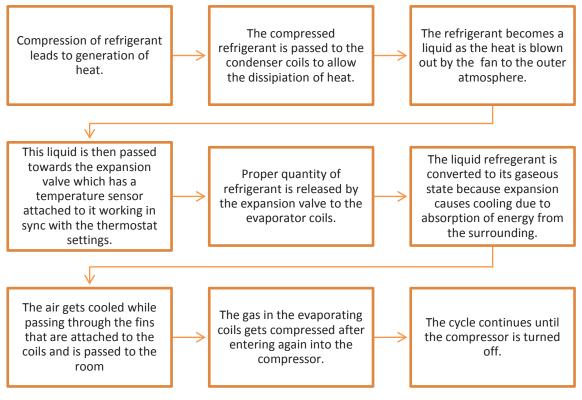


Fig. 5.1.7: Steps of refrigeration cycle

Heat is drawn by the air conditioner from the indoor and is released to the outdoor. The indoor plays as a source and the outdoor acts as a heat sink.

UNIT 5.2: Working and Installation of Window ACs

Unit Objectives



At the end of this unit, you will be able to:

- 1. Identify the different parts and working of Window ACs
- 2. Follow safety precautions for installation of Window ACs
- 3. Test-run a Window AC

5.2.1 Working of a Window AC -

Window ACs are the most common type of ACs used in homes and small offices. These are also the cheapest type of ACs.

Window ACs require a window or a hole in the wall, the size of the AC unit, and one part of the unit is inside the window/wall and the part is outside in the open, preferably with lots of space available.

Window ACs consist of two main units:

- Inside unit, which cools the room/space, consists of:
 - Return air grill
 - o Air filter
 - o Control panel
 - o Thermostat sensor
 - Adjustable louvers
 - Evaporator coil
- Outside unit, which absorbs the heat in the room and transfers outside the room, consists of:
 - Blower motor
 - Partition
 - o Fan
 - o Compressor
 - o Condesor coil
 - Drain tray/pipe

The assembly of a window AC is shown in the following figure:

A solid base on which all the parts are assembled.

A casing on which the base is installed. The casing is fixed on the wall or in the window.

An insulated partition which segregates the inside unit from the outside unit.

A front panel which has horizontal and vertical louvers, which can be adjusted as per the desired direction of air flow.

A control panel which has various controls to manage temperature, fan speed, etc. for the AC.

A refrigeration system comprising of condesor, compressor, expansion valve and evaporator. This sytem uses the same refrigeration cycle as that of a refrigerator.

An air circulation system, contains:

- •Blower which absorbs the inside air and filters it. The air then passes through the cooling coil to get chilled and then blow into the room again.
- Condeser fan
- •Fan motor

A drainage system allows removing of dew drops accumulate in the bottom base unit.

- •The AC unit is installed with a slight tilt angle towards outside for the collection of dew when the room air gets chilled.
- •There is a small opening at the back connected to the small drain pan and the piping for the drainage of water.

An electrical protection system contains a thermostat that senses the coil temperature.

- •It protects the motor connected to compressor against getting overheated.
- •It prevents burning of winding coil due to overheating while the air conditioner is running for long time by tripping the compressor and stopping it until it cools down.

Fig. 5.2.1: Assembly of a window AC

The parts of window ACs is the same as explained in the preceding units and is shown in the following image:

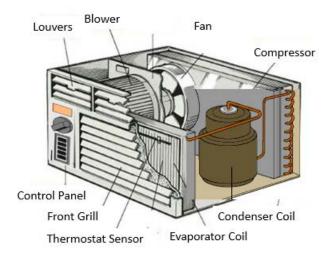


Fig. 5.2.2: Parts of a window AC

5.2.2 Installation and Safety Precautions

Prerequisites for Installation

Before going for installation of a window AC at a customer site, ensure that the instructions shown in the following figure are performed:

Carry all tools and personal protective gear required, neatly organized

Check that all tools and equipment, such as a drill, is working properly

Ensure all the units have been delivered before visting the site

Check the packing to see if it is porper and has not been tampered or damaged

Carefully unpack the unit and its parts, such as remote, grill, filter, and so on

Wear insulated shoes for installtion

Ensure there is a step ladder available if isntalltion is to be installed at a height

Fig. 5.2.3: Prerequisites for installation

Drilling

Ensure there is no loose wiring and plug has been properly insulated.

Use proper drill bits and key to lossen/tighten the bits.

Keep steady hands while drilling and wear goggles to protect eyes from debris and dust.

Gas Refilling

Discharge the refrigerant in open space.

Use gloves while handling the refrigerant.

Check the cylinder to ensure that it is sealed properly as per standards.

Hold and store cylinder in upright position.

Keep cylinders away from heat.

In case drilling or gas refilling needs to be done in the wall, then follow the precautions

Fig. 5.2.4: Precautions taken at during installation

Installation

Before installation, ensure you have carefully examined the site for installation and checked all conditions for installations, such as proper availability of space for indoor and outdoor unit, proper electrical points available, proper window/hole in wall available, and so on. The installation of a window AC looks similar to the one shown in the following diagram and the specified dimensions should be maintained while installing:

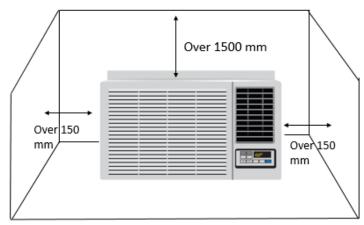


Fig. 5.2.5: Specification of dimensions of the AC unit

To install a window AC, perform the following steps:

- 1. Remove the AC carefully from its packaging.
- 2. Remove the glass/grill from the window where the AC needs to be installed.

- 3. Ensure that the hole/window is as per the dimensions required by the AC. If the hole/window is bigger, then apply proper wooden panelling or insulation around it to make it fit for the AC's size.
- 4. Analyse the frame of the hole/window to ensure that it has enough strength for holding the weight of the AC unit.
- 5. Fix the outer casing of the AC to the frame of the window. Ensure that it is firm and properly fixed. The casing need to be fixed strongly so that it can take the whole weight of the AC.
 - In case the hole is in a wall, then the casing needs to be fitted into the wall by drilling strong holes in the wall and securing the casing with strong screws.
 - Also, ensure that the casing is titled at a small angle (2-3 degrees) on the outside (back of the AC). This would ensure that the dew collected from the cooling coil is drained outside from the drain tray and pipe.
- 6. Using a colleague help, pick up the main AC unit and slide it in the casing carefully. Ensure the unit is sitting firmly in the casing and secure it properly using screws.
- 7. Connect the electrical wires to the control panel.
- 8. Place the front panel grill and filters.
- 9. Connect the power supply to the AC's cord. Check if the AC is working.

5.2.3 Test-run a Window AC

After installation of the AC, it is important to check if the AC is functioning properly and if it's controls (such as the remote) is also working properly. Moreover, you should also explain the basic functions of the AC to the customer after installation.

To test-run the AC, perform the following steps:

1. Ensure all electrical wiring has been done and the main power cord of the AC has been plugged in to the power point, as shown in the following image:

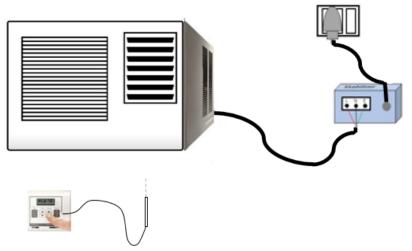


Fig. 5.2.6: Electrical wiring of AC unit

2. Ensure that all front grills and filters have been properly placed.

3. Switch on the AC and set the temperature at 18°C as shown in the following figure:

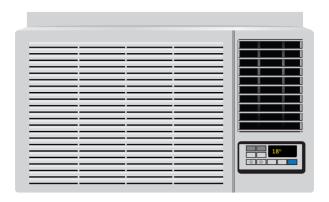


Fig. 5.2.7: Setting temperature

- 4. Let the AC run for 15-20 minutes.
- 5. Check the functioning of the front control panel.



Fig. 5.2.8: Checking the functioning of front control panel

6. Check the functioning of the remote control and all its buttons.




Fig. 5.2.9: Checking the functioning of remote

- 7. Check the cooling effect in the room after 15-20 minutes.
- 8. Check the following temperatures:
 - a. Outdoor unit should be approx. 42°C
 - b. Grill should be approx. 9°C

UNIT 5.3: Servicing Window ACs

Unit Objectives



At the end of this unit, you will be able to:

- 1. Describe wiring diagrams for window ACs
- 2. Test electronic components of window ACs
- 3. Service and repair window ACs

5.3.1 Wiring Diagrams for Window ACs

A field technician is required to service and repair the window ACs as per customer requests and complaints.

To be able to carefully service and repair an AC, the field technician should be able to read and understand the wiring diagrams of the ACs and understand the electric circuits and connections properly.

A simplest wiring diagram of a window AC is shown in the following figure:

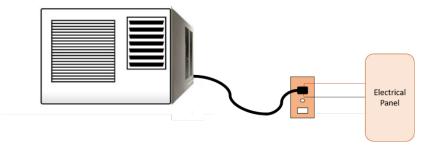


Fig. 5.3.1: Wiring diagram of a window AC

The following figure shows a wiring diagram of the inside unit of an AC:

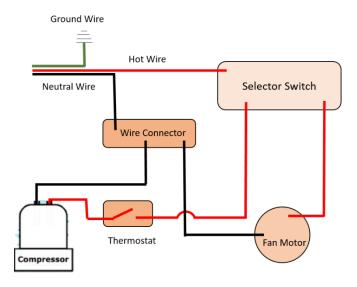


Fig. 5.3.2: Wiring diagram of the inside unit of a window AC

The power cable is split into three wires inside the unit as described in the following figure:

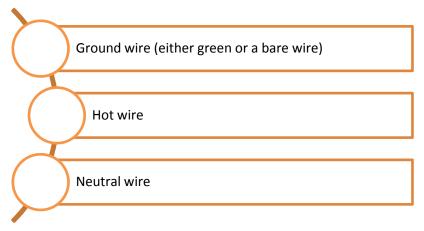


Fig. 5.3.3: Wires of a power cord

The ground wire is connected to the metal case of the unit.

The hot wire that feeds power to the important parts of the window unit, along with the compressor and the fan motor, connects the selector switch to the other parts, as follows:

- Hot wire → Selector switch → Thermostat switch → Compressor
- Hot wire → Selector switch → Fan motor

Neutral wire is directly connected to fan motor as well as the compressor through the wire connector that is placed at the back of the selector switch in order to keep all neutral wires common to each other as being connected to the same point.

The following figure shows another wiring diagram of an AC window with overload protection:


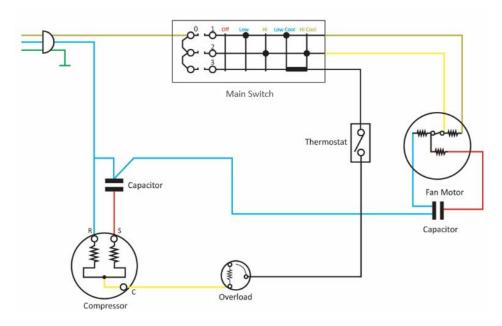


Fig. 5.3.4: Wiring diagram of an AC window with overload protection

5.3.2 Testing Electronic Components

A field technician should start with testing the various modes of operation to check which components of the window AC are operating fine or not. The following figure shows the steps of checking various components:

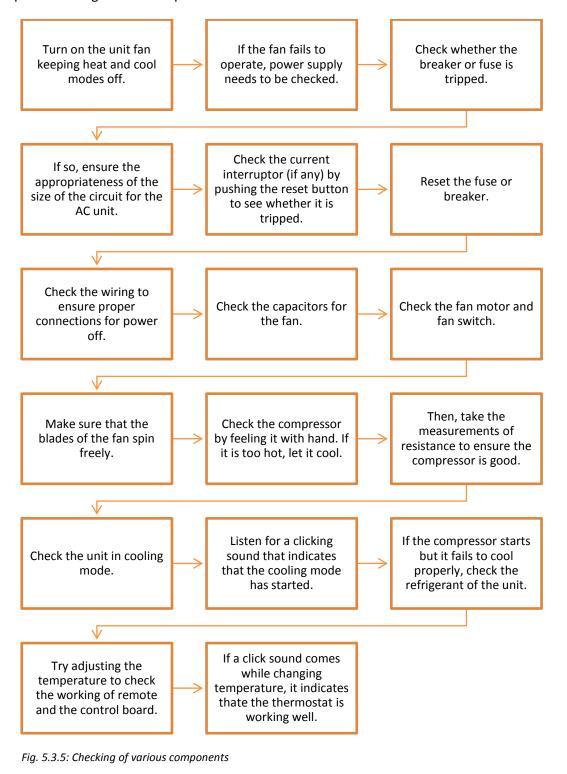

Testing the Compressor

In window AC units, rotary compressors are generally used. A field technician needs to follow the steps to test the compressor.

Step 1: Check the power outlet to make sure it is working well.

Step 2: Turn the power off and take out the unit's terminal cover by removing the mounting screws located at the four corners of the front of the air conditioner unit. Ensure that the terminals and wires are not damaged.

Step 3: Check the compressor to make sure that there is no cracked valve inside it.

Step 4: Test the electrical terminals using a multimeter. A typical unit has three terminals; C, R, and S. The continuity between every two terminals (C - R, C - S, and R - S) should be tested.

- Check the wire connections and if the wire is found faulty, replace it.
- If the resistance is higher (higher than 30 ohms), check if the compressor is hot. If so, it may be that the internal overload is open and wait for the compressor to cool down.
- If the resistance is high but the unit is cool, it indicates that the compressor motor is had.

Step 5: Check the resistance of each of the terminals to the compressor's body. If the resistance reading is low, it signifies that the motor is grounded and the compressor needs a replacement.

Testing Capacitor of AC

The following figure lists the steps to test the capacitor of a window AC:

Unplug the unit and remove it from its window mounting.

Remove the screws safely.

Locate the capacitors near compressor or fan motor:

•Run capacitors (oil-filled capacitors are round or oval in shape and silver in colour).

•Start capacitors (electrolytic capacitor are round and tubular in shape and black in colour).

Let the capacitor discharge by shorting its terminals together.

Remove the wires from the capacitor.

Test the capacitor terminals with multimeter.

Fig. 5.3.6: Steps for testing the capacitors

5.3.3 Repairing/Servicing Window ACs

An AC requires servicing and repairs due to wear and tear with usage. Improper maintenance also leads to requirement for repair. The following figure lists some categories of issues with ACs:

Refrigerant leaks

Failure of control or electrical component

Drainage problems

Failure of major component

Fig. 5.3.7: Some categories of issues with ACs

The following figure lists some specific symptoms that indicate the air conditioner needs a servicing:

Water drips from the front panel

Air comes out from the vents, but does not cool down to specified temperature

AC unit does not turn on

There is ice visible on the coils

Water leaks from the drain channel

Fig. 5.3.8: Some specific symptoms of AC problems

A field technician needs to perform the following steps before starting the repairing:



Fig. 5.3.9: Troubleshooting steps

The following table lists some AC problems and their possible troubleshooting steps:

Problem	Possible Troubleshooting Steps
The AC unit does not turn	Check the fuses or the breaker.
on	Check the wiring and the selector switch.
Air coming out from the unit is not cold enough	 Check that the fan selector is set to "Fan Only" mode. Check whether the thermostat is set at high warm position. Keep the exhaust vent control in "Open" position. Ensure that the location of the thermostat sensing bulb is correct. Check the cleanliness of the coils. Check the level of the refrigerant.
The room is warm while the unit is cooling	 Check the level of the refrigerant. Check whether the fan selector is set to "Fan Only" mode. Check whether the thermostat is set at high warm position. Keep the exhaust vent control in "Open" position. Ensure that the location of the thermostat sensing bulb is correct. Check the position of the air directional louvers. Ensure that the front is not blocked. Check that the outside louvers are not blocked by bricks or anything else. Ensure that the cooling capacity is sufficient for the room size. Check the cleanliness of the coils. Check the level of the refrigerant.
Water is dripping inside	 Ensure that the unit is slightly tilted towards the outside. Check whether there is any blockage in the drain. If there is any obstruction, clean the drain by. Removing the unit from the window. Disconnecting the power and washing the unit. Letting the unit to dry thoroughly and reapplying power.
The fins on the coils are not working properly	 Use fine comb to make the fins straight. Ensure flattening is minor, as more of it will affect the operation.
The winding coil on the front side gets frozen	 Check the cleanliness of the coils. Check the cleanliness of the air filter. Ensure that the thermostat is working properly. Check the level of the refrigerant.

AC cycles keeps On and Off very frequently	 Check whether the thermostat sensor is positioned properly. Ensure that the sensor is not touching the evaporator coil. Adjust the wire carefully. Ensure that the front panel or the thermostat is not blocked with drapes. Check for any refrigerant leak. Ensure that the condenser is not covered with leaves.
AC unit blows circuit breaker or fuses	 Check that the fins are not damaged. Check the size of the circuit (amps). Most window ACs require 120 volts and can be operated in a circuit with 15 amp. A dedicated circuit may be needed by some larger units. The circuit is blown if it is shared with other loads being operated simultaneously. Try running a dedicated circuit with 20 amp for the unit.

Fig. 5.3.10: Troubleshooting steps

Repairing a Thermostat

Thermostat, located behind the control panel, has a special sensing bulb connected to it to sense temperature controlled by thermostat. It extends from the thermostat to area of the evaporator coil. A field technician should follow the steps shown in the following figure to service a thermostat:

Remove the grill and then the control panel from the AC unit.

Remove thermostat carefully and tag the location of bulb to return the bulb in the identical location.

Test the thermostat using a multimeter.

- •Clip the probes of tester to the terminals of the thermostat, and turn temperature control setting to coldest.
- •If the meter reading is zero, it is functioning properly.
- •If the meter reading is higher than zero, the thermostat must be replaced with a new one of same type.

Fig. 5.3.11: Steps for servicing a thermostat

Repairing a Fan Generally loose or dirty blades of a fan leads to malfunctioning. Cleaning and tightening the fan blades usually fixes the problems with fan. The following figure lists the steps to repair the fan of an AC unit: Check for any looseness of the fan

looseness of the fan Tighten the screw with clean the dirt and dust blades on the motor screwdriver. with soft cloth. shaft. If fan contains oil ports, If the reading is Check with multimeter apply drops of motor oil between 3-30 ohms, whether the fan motor to the ports at starting motor is functioning is faulty. properly. of cooling season. Remove the fan, power If it is zero or extremely wires, mounting bolts Install the new motor. high, replace the and condensor coil (if motor. required).

Fig. 5.3.11: Steps for repairing the fan of the AC unit

UNIT 5.4: Installing Split ACs

Unit Objectives



At the end of this unit, you will be able to:

- 1. Identify the different parts and working of split ACs
- 2. Follow safety precautions for installation of split ACs
- 3. Perform IDU and ODU installation
- 4. Connect IDU and ODU
- 5. Test-run a split AC

5.4.1 Parts of a Split AC

The main reasons for split air conditioner are getting popular are their elegant looks and silent operation. There are two units in a split AC:

- Indoor unit: It is installed inside the room which cools the room.
- Outdoor unit: It is installed in open space outside the room at a convenient location for installation and maintenance.

Apart from the two units there is copper tubing that connects them.

The following figure lists the parts of a split air conditioner:

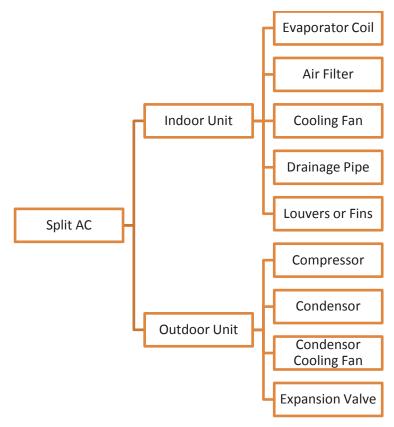


Fig. 5.4.1: Parts of a split air conditioner

Outdoor Unit

A great amount of heat is generated inside in outdoor unit by the compressor and the condenser. There should be sufficient air flow around the unit. The following figures show the outdoor unit of a split AC:






Fig. 5.4.2: Outdoor unit of a split AC

Compressor

The compressor increases the pressure of the refrigerant by compressing it and sends to the condenser. Compressors are of hermetically sealed type in which the motor used for driving the shaft is not visible externally.

Condenser

The condenser is the coiled copper tubing covered with the aluminum fins and contains one or more rows based on air conditioning unit size. It allows the refrigerant with high temperature and pressure received from the compressor to give up the heat. The copper and aluminum let the heat from the refrigerant be removed at faster rate.

Condenser Cooling Fan

The condenser cooling fan located in front of the condenser coil and compressor, is driven by a motor and has three or four blades. With the rotation of the blades the fan absorbs the air from the outside and with the aluminum fins blows the air over the condenser and the compressor and thus cool them. The hot air is passed to the open space allowing air circulation.

Expansion Valve

It is generally a copper capillary tubing with many rounds of coils. It allows a sudden drop of temperature and pressure of the refrigerant coming from the condenser.

Indoor Unit

The indoor unit of the split AC is comprised of a box type housing which encloses the important parts. The following figure lists the types of indoor units:

Wall mounted

Ceiling mounted

Floor mounted

Fig. 5.4.3: Types of indoor unit of a split AC

The following figure shows the indoor unit of a split AC:

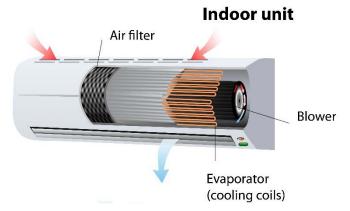


Fig. 5.4.4: Indoor unit of a split AC

Evaporator Coil or the Cooling Coil

It is comprised of several turns of a coil in one or more rows. The number of rows is based on the capacity of the conditioning system. The coil is encapsulated with aluminum fins so that maximum amount of heat can be transferred to the air inside the room from it. The following figure shows the working of the evaporating coil:

The refrigerant with low pressure and temperature from the tubing enters the coil.

The room air is absorbed by the blower and passed over the coil leading to cooling of air.

This cool air is then passed to the room.

Fig. 5.4.5: Working of the evaporating coil

The temperature of the refrigerant inside the evaporating coil rises after the heat is absorbed from the room air. It passed through the copper tubing to the compressor of the outdoor unit. The refrigerant tubing of both sides are encapsulated with the insulation tape.

Air Filter

The air filter allows supply of clean air to a room by removing dirt particles from it. The room air is passed through the air filter before it is passed to the cooling coil.

Cooling Fan or Blower

It pulls in the warm and dirty air from the room and blows out cool and clean air. The fan speed can be changed as it is connected to a small motor having multiple speed options.

Drain Pipe

When the room air is passed over the cooling coil, the air temperature reaches below the dew point temperature. This results in forming of dew drops on the surface of the cooling coil due to condensation of the water vapor present in the air. These water drops are accumulated inside the indoor unit. A drain pipe is connected from the space to an external place outside where water can easily be disposed off.

Louvers or Fins

Cool air is supplied by the cooling fan into the room through the louvers that allow changing the direction of the air as per the requirements. The following figure lists the types of louvers:

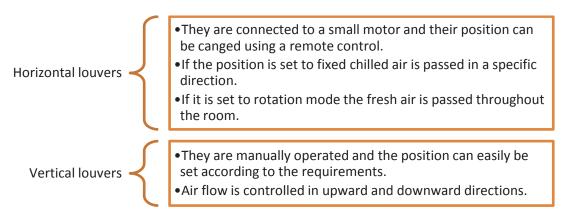


Fig. 5.4.6: Two types of louvers

Refrigerant Piping or Tubing

The refrigerant piping comprised of copper tubing, connects the outdoor and indoor unit. It is flexible enough to be coiled easily.

The low pressure and low temperature refrigerant goes from the expansion valve to the copper tubing, that is also connected to the cooling coil at the other end. The following figure shows the connection of indoor and outdoor unit through refrigerant tubing:

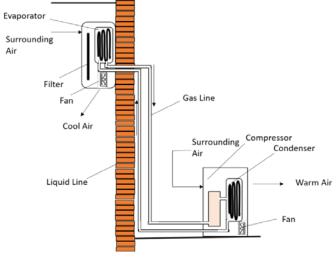


Fig. 5.4.7: Connection of indoor and outdoor unit through refrigerant tubing

The distance between the two units (indoor and outdoor) should be less as there is some loss of the cooling effect when the refrigerant flows through the tube.

The tubing is covered with the insulation as it is exposed to the atmosphere which may be high temperature. The cooling effect will be lost if the tubing is not covered.

There is another refrigerant tubing connecting the units for the refrigerant to travel from evaporating coil to the compressor. Both the tubing are covered using an insulation tape.

5.4.2 Precautions

It is vital to follow certain safety precautions while installing air conditioners. The following figure represents the general guidelines that should be followed to prevent any potential injury or property damage:

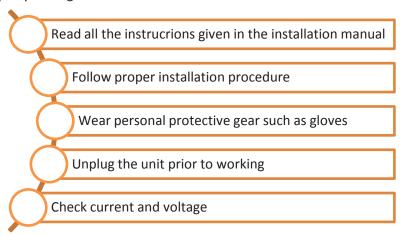


Fig. 5.4.8: Safety precautions

Safety Precautions While Wiring

In addition to these general safety precautions, it is imperative to follow precautions while working with electrical systems. Any negligence or carelessness can cause electrical shock leading to severe personal injury or death. The following figure represents the electrical safety precautions to be followed:

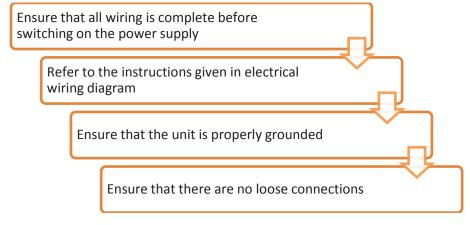


Fig. 5.4.9: Electrical safety precautions

Safety Precautions While Transporting

The air conditioner units are very heavy. Special care needs to be taken to lift the units as in the following: .

- Never try to lift the unit alone.
- Always ask someone for help.
- Proper posture should be maintained when lifting the unit from the ground.
- Make sure to bend the knees to minimize any risk of back injury.
- Look out for the sharp edges and the aluminium fins of the air conditioner.

Safety Precautions While Installing

While installing, the following precautions should be taken for safety:

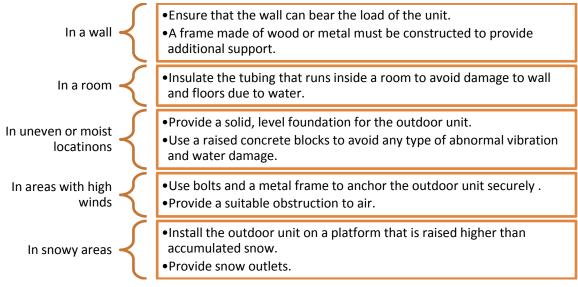


Fig. 5.4.10: Installation safety Precautions

Safety Precautions While Connecting Refrigerant Tubing

The following precautions need to be taken while connecting the refrigerant tubing:

- Always keep the tubing runs short
- When connecting two tubes, use flaring method
- Check for any leakage before doing the test run

5.4.3 Installation of Split AC —

The first step to install a split AC is to select the best location for the installation. The following figure lists the points to be considered for location of an AC:

Do not install the unit at such a location where there is a heat source nearby

Ensure there are no obstacles in air circulation

Ensure there is proper ventilation on all sides

Ensure there is easy access to drainage

Do not install the conditioning unit near the entrance or exit doorway

Make sure that the unit is accessible for maintainance

Fig. 5.4.11: Installation location

Indoor Unit Installation

The steps of installation of indoor unit are as follow:

Step 1: Select an appropriate location for the unit as shown in the following figure:

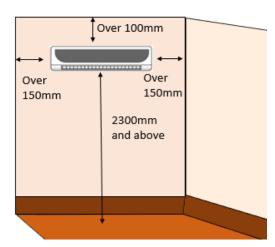


Fig. 5.4.12: Indoor unit installation location

Step 2: Fix the mounting plate to the wall inside the room and secure it with screws as shown in the following figure:

- Hold the mounting plate against the wall.
- Use a level to check whether the plate is levelled horizontally.
- Fix it to the wall by drilling holes in the wall at appropriate spots.
- Insert anchors into the drilled holes and secure the plate to the wall using tapping screws.




Fig. 5.4.13: Secure the mounting plate

Step 3: To fit the piping, drill a hole in the wall as shown in the following figure:

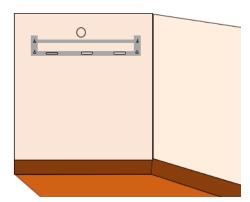


Fig. 5.4.14: Drill a hole for piping

- Drill a hole having a diameter of around 7.5 cm through the wall.
- Make sure that the slope of the hole towards the exterior is kept downward so that adequate drainage is possible.
- Insert a flexible flange through the hole.

Step 4: Make sure that the electrical connections are proper:

- Remove the cover by lifting the front panel of the unit.
- Ensure that the wires are connected to the terminals of the screw.

Step 5: Connect the pipes:

- Run the piping towards the hole.
- Cut a length from the PVC pipe that is shorter than the length between the wall surfaces of the interior and the exterior side (around 6 mm).
- Place the cap on the end of the PVC pipe that is inside the room.
- Couple the drain pipe, the copper pipes and the power cables together using an electrical tape as shown in the following figure:

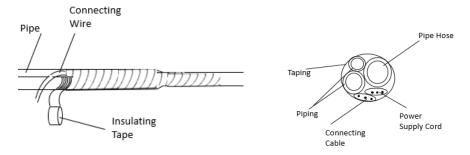


Fig. 5.4.15: Connect the pipes

- Tighten the connection by using 2 wrenches, working in opposite directions to secure the pipe to the indoor unit and attach the drainage pipe to the base of the indoor unit.
- Run the pipes and cables coupled together through the hole making sure that the water is drained in a proper place by the drainage pipe, and the drain hose is sloping downward for efficient drainage, as shown in the following figure:




Fig. 5.4.16: Direction of drain hose

The following images show some examples of incorrect installation:

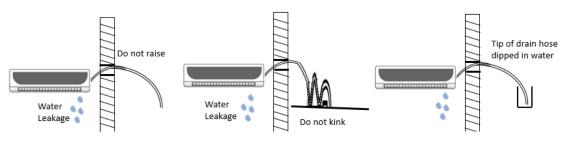



Fig. 5.4.17: Examples of incorrect installation

Step 6: Secure the indoor unit by pressing it against the mounting plate, as shown in the following figures:






Fig. 5.4.18: Secure the indoor unit

Outdoor Unit Installation

The steps of installation of indoor unit are as follows:

Step 1: Select an appropriate location for the unit, as shown in the following figure:



Fig. 5.4.19: Outdoor unit location

Step 2: Hold the mounting plate against the outside wall:

- Secure it properly.
- Ensure that it is in a level position.
- Provide rubber cushioning under the feet of the unit so that vibration is minimized.

Step 3: Connect the wires.

- Remove the cover and connect the cables and wires consulting the wiring diagram and following the manufacturer's instructions to connect the cable wires.
- Use a cable clamp to fasten the cables.
- Replace the cover.



Fig. 5.4.20: Connecting electric wires

Step 4: Fasten the flare nuts to the pipes on the outdoor unit, as shown in the following figure:



Fig. 5.4.21: Secure flare nuts

Completing the Installation of a Split Air Conditioner

After the installation of the indoor and outdoor units of the split AC, the given steps should be followed:

Step 1: Check the amount of air and the humidity of the refrigerant circuit, performing the following steps:

- Detach the caps from the service port and the valves (both 2 way and 3 way).
- Attach the hose of a vacuum pump to the service port.
- Turn the vacuum pump on.
- Switch the vacuum pump off after closing the low pressure knob.
- Check whether the valves and joints have any leak
- Replace the caps after disconnecting the vacuum.

The following figure shows removing air and humidity:



Fig. 5.4.22: Remove air and humidity

Step 2: Use insulating covering and insulating tape to wrap the joints of the piping, as shown in the following figure:





Fig. 5.4.23: Wrap piping joints with insulating tape

Step 3: Use clamps to affix the piping to the wall and use expanding polyurethane foam to seal the hole in the wall.

5.4.4 Test-run a Split AC

It is important to measure and record the test run properties to check whether the unit is installed properly, and to store the information after completing installation for further service. The following figure shows the items to be measured:

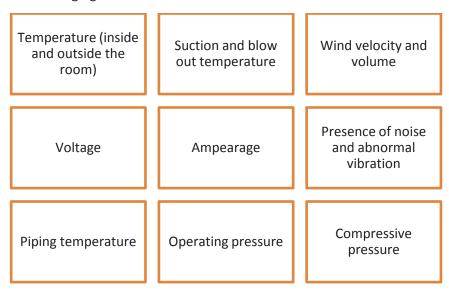


Fig. 5.4.24: Items to be measured

In addition to the preceding items, the structure and appearance of the unit should also be checked to ensure that it complies with the standards. The following figure shows the checks that need to be performed:

Check air circulation is adequate

Check water is draining smoothly

Check refrigerant and drain piping is properly insulated

Check refrigerant is not leaking

Check remote control switch is functioning properly

Check there is no fault in wiring

Check terminal screws are not loose

Fig. 5.4.25: Checks to be performed

The following figure shows the tasks that the field technician needs to do the after completing the installation:

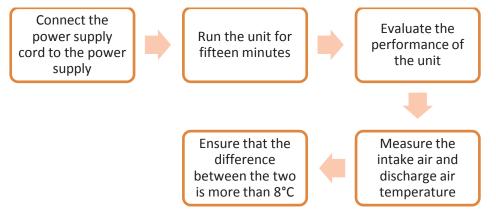


Fig. 5.4.26: Tasks to be performed after installation

UNIT 5.5: Servicing Split ACs

Unit Objectives



At the end of this unit, you will be able to:

- 1. Describe wiring diagrams for split ACs
- 2. Test electronic components of split ACs
- 3. Perform dry and wet servicing

-5.5.1 Safety Precautions While Servicing

While servicing an AC, the field technician should take the following precautions:

- While working with electrical parts and connection, switch off the power at the main power box.
- Keep fingers as well as clothing away from the moving parts.
- Clean the site after installation is finished, ensuring that there are no metal scraps of wiring left inside the unit which is being serviced.

5.5.2 Wiring Diagram of Split AC

A field technician is required to service and repair the split ACs as per customer requests and complaints.

To be able to carefully service and repair an AC, the field technician should be able to read and understand the wiring diagrams of the ACs and understand the electric circuits and connections properly. A typical wiring diagram of a split AC is shown in the following figure:

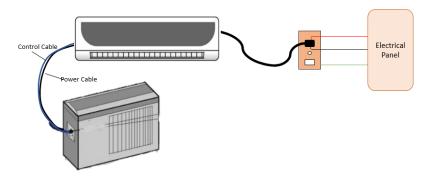


Fig. 5.5.1: Typical wiring diagram of a split AC

The following figure shows the wiring diagram of a split AC outdoor unit: NHML Condenser Fan Motor Blower Fan Thermostat 3 4 R С Running Neutral Overload Capacitor Protector Compressor

5.5.3 Perform PMS (Dry and Wet Servicing)

Dry servicing refers to quick servicing of the AC which should be done every six months. Wet servicing is detailed cleanup of the AC units that should be done once in a year.

Fig. 5.5.2: Wiring diagram of the outdoor unit of a split AC

Steps for Dry Servicing

For indoor unit the steps for dry servicing are as follow:

Step 1: Open the cover and take the filter out as shown in the figure:



Fig. 5.5.3: Taking the filter out

Step 2: Clean the coil to remove the dust by using a brush as shown in the following figure:



Fig. 5.5.4: Cleaning the dust

Step 3: Wash the filters as shown in the following figure and put them back in their places.



Fig. 5.5.5: Washing the filter

The field technician should also clean the outdoor unit to remove the dust and check the drainage pipe. The following figure shows cleaning of outdoor unit:



Fig. 5.5.6: Cleaning of outdoor unit

Steps for Wet Servicing (Indoor Unit)

The steps for cleaning the indoor unit are as follow:

Step 1: Remove the cover and the filters and then remove the front cabinet after unscrewing it as shown in the following figure:



Fig. 5.5.7: Remove the front cabinet

Step 2: Hang the wash bag around the indoor unit especially the fan coil unit as shown in the following figure:

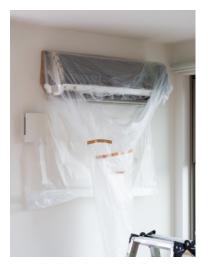


Fig. 5.5.8 Hanging the wash bag around the indoor unit

Step 3: Spray the cleaning agent on the rotary blades and coils and wash them after 10-15 minutes. The following figure shows cleaning the indoor unit:



Fig. 5.5.9: Cleaning the indoor unit

Step 4: Remove the bag filled with water.

Step 5: Wash the filter, front cover and the front cabinet and then fix them to the proper place. The following figure shows washing on front cover:



Fig. 5.5.10: Washing front cover

The steps for servicing the outdoor unit are as follow:

Step 1: Open the main connection cover and measure the voltage and current as shown in the figure:



Fig. 5.5.11: Measuring voltage and current

Step 2: Measure pressure of the service valve using manifold gate. The following figure shows measuring of pressure:



Fig. 5.5.12: Measuring pressure using manifold gate

Step 3: Remove the wires after switching off the power.

Step 4: Remove the fan unscrewing it using T spanner. The following figure shows the parts of outside unit:



Fig. 5.5.13: Parts of outside unit

Step 5: Remove fan motor and cover the outdoor connection box.



Fig. 5.5.14: Covering the connection box

Step 6: Spray coil cleaner and wash the coil and compressor and clean the outdoor body and other parts.

Step 7: Wash the fan and let it dry.

Step 8: Fix the parts to their correct position.











6. Washing Machines

Unit 6.1 – Functions and Parts of Washing Machines

Unit 6.2 – Installing Washing Machines

Unit 6.3 – Servicing and Repairing Washing Machines

Unit 6.4 – Troubleshooting Common Problems



Key Learning Outcomes



At the end of this module, you will be able to:

- 1. Identify the different types of washing machines
- 2. Describe the basic functions of washing machines
- 3. Identify the different parts of washing machines
- 4. Install semi-automatic washing machines
- 5. Test the components of semi-automatic washing machines
- 6. Repair semi-automatic washing machines
- 7. Install top loading, fully automatic washing machines
- 8. Install front loading, fully automatic washing machines
- 9. Test the components of fully automatic washing machines
- 10. Repair fully automatic washing machines

UNIT 6.1: Functions and Parts of Washing Machines

Unit Objectives



At the end of this unit, you will be able to:

- 1. Identify the different types of washing machines
- 2. Describe the features and functionalities of different parts of a washing machine
- 3. Identify the various washing cycles
- 4. Describe different type of switches

6.1.1 Basic Components of Washing Machines

A washing machine contains several parts which work together to complete the washing of the laundry. The following image shows parts of washing machine:



Fig 6.1.1: Parts of a washing machine

Some basic parts of a washing machine along with their functions are:

Components	Function	Image
Printed circuit board (PCB)	It is used to control different functions of a washing machine such as controlling water levels, detergent dispensing mechanism, various wash cycles controls and so on.	

Lint Filter	Lint filter is used to filter the lint in the washing machine which comes	
	from shirts, sweaters, socks etc. while washing.	
Drain Pump	It is located at the bottom of the washing machine and pumps up water in tub to drain	
Drum Washer/tub	It helps in cleaning clothes by moving clothes through water using the rotation of the tub and gravity. It moves the clothes in and out of the water with the help of side paddles.	
Inlet Valve (Solenoid Valve)	It is also known as solenoid valve as its functioning is controlled by solenoid. Solenoid controls the ports that control the setting of sending electrical signals to open and close the flow of hot and cold water in the drum washer.	
Pressure Sensor	It is used to detect water level in the drum. One end is connected to the bottom of the tub and another one connected to the switch. As the water rises more than required, the end of it, connected to a switch closes the electrical contact.	

Fig. 6.1.2: Basic parts of washing machine

The Gear Mechanism

The drive mechanism of washing machine depends on gear mechanism for two jobs as described:

- In the process of agitating the clothes which means moving them back and forth inside the tub
- In the process of spinning the dryer, moving water out

The gears inside the machine work in coordination with the motor. If the motor spins in one direction, the gearbox helps in agitating the clothes and if the motor spins in another direction, the gearbox goes in spinner.

Linear movement is described as the movement of gearbox in a straight line as in the case of agitating the clothes.

Angular movement is defined as the movement of gearbox in the same angular direction and at the same speed as in case of spinning the clothes (moving water out).


The twisting and turning of machine is measured by a formula known as torque which is defined as a force around a given radius. In case of washing machine, when the gearbox goes in a spin, the torque applied in the outer and inner shaft is same.

RPM is defined as revolutions per minute. It is used to determine the number of rotations taken by the spinner and the agitator.

Working of a Washing Machine

The washing process of a washing machine comes under the working of washing machine. Different parts of a washing machine play different roles in the washing process of clothes.

The washing process of washing machine comprises of the points as described below.

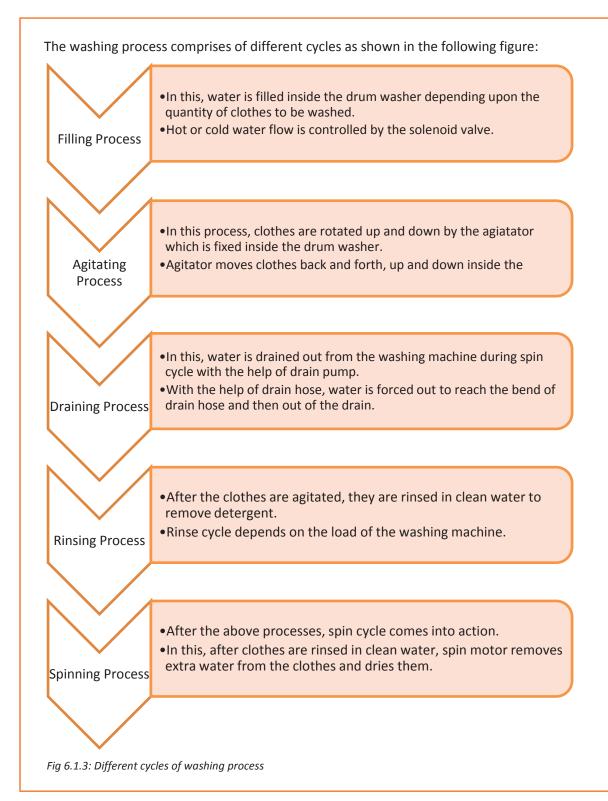

6.1.2 Types of Washing Machines

Washing machines are classified depending upon their features and functionalities. The following figure shows different types of washing machines:

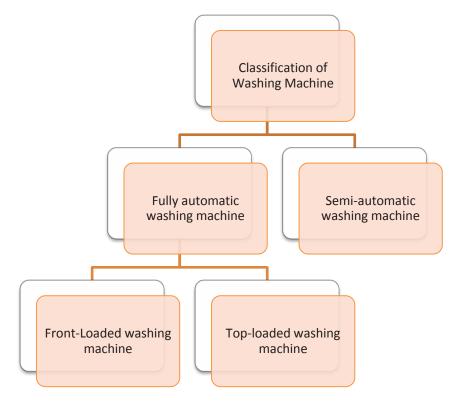


Fig 6.1.4: Classification of washing machines

The explanation for these machines is as follows:

- Fully automatic Machine: This type of machine works automatically in different cycles. From filling process till spinning process, it doesn't require any manual handling. It sets the temperature of water and also drains off water. In this each cycle begins automatically after the previous cycle ends. It is further divide into:
 - o Top-Loading washing machine
 - o Front-Loading washing machine

The following table describes the differences between front load and top load washing machine based on their features and functionalities:

Top-Loading	Front-Loading
Top loading washing machine is a mid- range and economical machine.	Front Loading washing machine is a premium machine.
Top loading machines are easier to move, and the lid opens from the topside.	Front loading washing machines are heavier than the top loading ones and their lid is operated from the front side.

In this type of a washing machine, clothes can be added in between the washing process.	Once the washing process has started, a front-loading machine cannot be stopped.
Top Loading machines give moderate performance.	Front loading machines give better performance.
In top loading machines, the maintenance cost is low	As this machine has some serviceable parts, its maintenance cost is high

Fig 6.1.5: Difference between top loading and front loading washing machine

- **Semi-automatic washing machine**: This machine works manually, and it is better than fully automatic machine as it saves water and detergent. It consists of two tubs:
 - o Wash Tub
 - o Spin Tub

In **wash tub**, it agitates the clothes and in this, we can fill the water according to the requirement and conditions. Drain process is also done manually by rotating the drain switch.

In **spin tub**, extra water from the clothes is removed by setting the time period for which it will rotate.

The following image shows a semi-automatic washing machine:



Fig 6.1.6: A semi-automatic machine

6.1.3 Different type of Switches

A switch is a component used to make or break connections in an electrical circuit. It can be operated manually to control a circuit such as a light switch or can be operated by a moving object. It is made to control a wide range of currents and voltages.

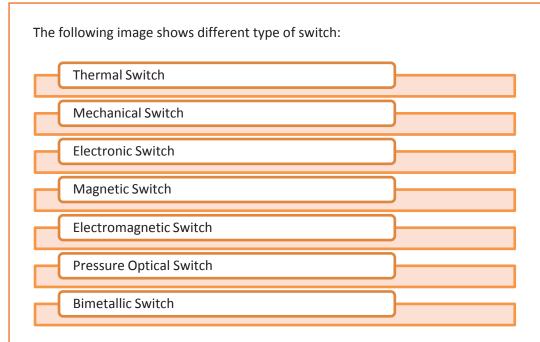


Fig 6.1.7: Types of switches

• Thermal Switch: It is also known as a thermal cut off switch as it cuts off electrical signals when the temperature exceeds its limit. It is used in washing machines to prevent washing machine motor from overheating.

The following image shows a thermal switch for washing machine:



Fig 6.1.8: Thermal cut off switch

• **Mechanical Switch:** This switch is basically a master timer switch which decides that for how much time the washing motor will rotate and also the direction of the spinner, thus it also acts as a spin direction controller.

The following image shows a mechanical switch for washing machine:



Fig 6.1.9: A mechanical switch

• **Electronic Switch**: This switch is used in an electrical circuit to interrupt flow of electric current. In washing machines, electronic switches are used with transistors. The following image shows an electronic switch:



Fig 6.1.10: Electronic switch

• Magnetic Switch: This switch helps in determining whether the lid is closed or not in case of front loaded washing machine. In this, magnet is attached in the lid and a switch is connected in the frame of washing machine. When the lid touches the frame of the washing machine, switch is closed and it starts the washing process.

The following image shows magnet switch:



Fig 6.1.11: A magnetic switch

• **Electromagnetic switch**: This switch is helpful in allowing the entry of hot or cold water in the tub with the help of solenoids attached at one end of hot side and other end of cold side. It manages the flow of water depending upon the temperature required. The following image shows electromagnet switch:



Fig 6.1.12: An electromagnetic switch

Pressure optical switch: This switch determines how much water is flowing inside the
tub through a water valve. This switch comes into action, when the pressure of water
exceeds its limit. Thus, it saves overflow of water in the drum washer.
The following image shows pressure optical switch:



Fig 6.1.12 A pressure optical switch

• **Bimetallic Switch**: This switch is used in washing machines for automatically controlling the temperature (in case the appliance gets heated, then the switch will turn off the appliance and will turn it on again after the temperature has come down to the expected normal level).

The following image shows a pressure optical switch:



Fig 6.1.13: A bimetallic switch

UNIT 6.2: Installing Washing Machines

Unit Objectives



At the end of this unit, you will be able to:

- 1. Identify the specifications for setting up the washing machine
- 2. Understand customer requirements and site conditions
- 3. Understand how to connect the washing machine
- 4. Understand standard operating procedures

6.2.1 Specifications for Setting up Washing Machine

To be utilized productively, a washing machine needs to be installed properly along with its supporting accessories which are important in its proper functioning. A washing machine comes with various functionalities which makes day to day work easy. A field technician should read the product manual and set up the appliance according to it and keeping in mind customer's requirement.

Recommended Appliance Requirements

Some manufacturers of washing machine often provide the consumer with a set of requirements that are different from those that are needed to run a usual washing machine. These requirements are generally known as the recommended requirements. They are always at a level above that of the minimum requirements. They show an ideal situation which is required to run the appliance.


Along the same lines, it is recommended that a field technician, prior to a client visit, checks the site conditions. This will help in the analysis and identification of the actual conditions at a customer's site.

6.2.2 Check Customer Requirements

A field technician is responsible for the installation or repair/maintenance of the washing machine. When work is allocated, it is important to understand and analyse the requirement before going ahead with the plan of action or visiting the customer's site.

The following figure shows the workflow for the role of a field technician: New Carry the needed equipiment, manual and warranty Installation: Carry the bill/invoice for new purchase Confirm the address and inform about the time of visit Maintenance Ask about the service, repair, maintenance and Annual Maintenance /Repair: Contract (AMC) of the equipment Carry the required tools and equipment parts Confirm the address and inform about the time of visit Fig.6.2.1: The workflow for installation and repair Before visiting the customer for installation or repair, it is important to understand the requirement of the customer. The following figure represents the various activities which

should be done before a visit to the customer's site is scheduled:

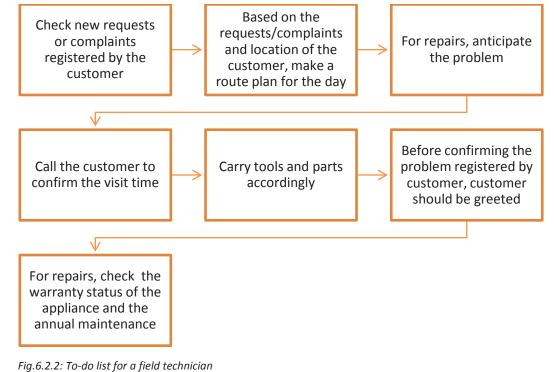

6.2.3 Unpacking the Washing Machine There are certain steps involved in complete unpacking and taking out a washing machine. The following figure lists the main steps involved in a placing washing machine set up: Open the packaging of the new product Take out the appliance/modules carefully Check the parts/components inside the package Before placing the machine, seek input from the customer Plumbing installation material for inlet and outlet valves should be there Read installation manual to set the washing machine at a suitable distance from the water tank Ensure that the machine is placed against an exterior wall so that the drain hose can be installed in the inside Ensure that the washing machine is placed close to the nearest plugging point Place the machine on a stand as instructed by the company in the installation manual and ensure that it is in an obstruction-free area. Fig.6.2.3: Steps involved in setting up a washing machine

Opening the Packaging

After getting the washing machine to the site, remove the package carefully and check the parts inside it. They should match the checklist and the colour, and the design of the washing machine should be as per the customer's order. The following figure represents the steps involved for unpacking the washing machine package to ensure proper installation:

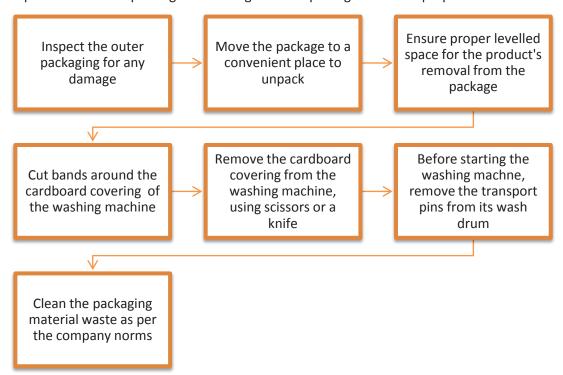


Fig.6.2.4: Steps for unpacking a washing machine package

The tools used for handling and unpacking a system are shown in the following figure:



Fig. 6.2.5: Tools used in handling and unpacking a system

Take out the Washing Machine

Take out all the supporting accessories and the washing machine carefully from the package. Check and understand the symbols on the package to know about the cautions and warnings related to the installation.

The following figure depicts some common warning symbols along with their meanings:



A warning or a notice that is important.



The contents of the package are sensitive to water and should be protected.



The contents of a package are fragile.



The direction in which the box should be positioned. The line shows the bottom and the arrows point upwards.



Packaging materials have been made from recyclable materials.



Warning that the material may produce electric shock.

Fig. 6.2.6: Common warning symbols on a package

Checking the Components

To ensure smooth installation, the parts inside the package must be checked so that if there is any part missing or any damage found, it can be informed to the company as early as possible. In addition, do the following things:

- Check all the parts for any damage that may be caused during shipping. If any damage is found, it should be reported to the carrier and the dealer
- Check that the design and colour of the washing machine is matching to the customer's order
- Check inside the package for all the supporting accessories of the washing machine
- Match the accessories against the delivery checklist

Connect all the Accessories of a Washing Machine

After checking all the parts, the next step is to connect all the accessories such as water pipe, stand on which washing machine will place, plug to provide power source to washing machine and so on. The following image shows different accessories connected to the washing machine:

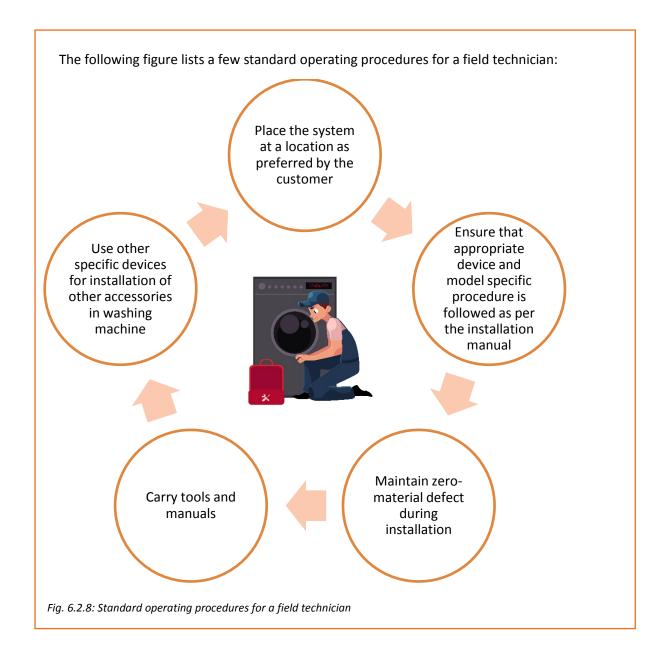


Fig. 6.2.7: Different accessories connected to the washing machine

The last step of the assembling process is to provide power to the washing machine. The power can be provided by simply inserting the power plug into the socket and turning it on.

6.2.4 Standard Operating Procedures -

Standard operating procedures provide a stable platform for performance measurements. All companies, be it small or large, have documented work standards to ensure consistent progress. It is the responsibility of the field technician to follow these standards. The technician should adhere to the work standards to meet the targets and achieve sustainability in the workplace. He/she should also follow the safety standards to stay safe while working with electrical and electronic components.



UNIT 6.3: Servicing and Repairing Washing Machine

Unit Objectives



At the end of this unit, you will be able to:

- 1. Identify the customer's requirements
- 2. Understand how to connect all the parts/components of washing machine
- 3. Understand how to install the parts of washing machine

6.3.1 Customer Requirements

Understanding the needs of a customer is one of the foremost parts of a technician's job role. This includes the following practices:

- Greet the customer and talk politely
- Understand the customer's requirement
- Provide the best possible and cost-effective solution to the customer
- Ensure that the customer is satisfied with the service

When work is allocated, it is important for the field technicians to understand and analyse the requirement before going ahead with the plan of action or visiting the customer's site. This means that they should be able to understand what their customers want and also know how to satisfy their needs. They need to know how to deal effectively with the customers.

Further, the technician should place the washing machine as per the customer's need. Primarily, the field technician must listen to the customer, even if the viewpoint is the same let the customer vent it off. After the customer has finished, express feeling and then respond accordingly.

Provide immediate response to the problem detailed by the customer, if possible. At times, it may mean bending the rules, but customer satisfaction is the key to success and going out of the way can just hit the nail on its head.

Fig. 6.3.2: Steps to connect various parts

6.3.2 Connecting the Components After the correct placement of the components, the next step is to connect them with the washing machine. The following figure shows how to connect various parts to the system: In the household plumbing, check for the inlet valve of water Check the machine for any leakage and proper Make sure the inlet functioning after doimg all valve is turned off the connections Secure the connection Connect the valve to of the power supply and the inlet water hose of the inlet and outlet thewashing machine valves (PVC hose) Connect the drain Connect it with the hose pipe of the power supply or the washing machine stabiliser to the waste system

6.3.3 Installing the Washing Machine

The step by step procedure to install a washing machine is as follows:

1. Firstly, decide the place where the machine has to be installed, keeping in mind the customer's requirement.

- 2. Place for installing washing machine should be steady & flat level surface to minimize the vibration noise and smooth operation.
- 3. Approximate clearance required on all sides should be 10 cm.
- 4. If surface is not flat enough use stands with adjustable legs or use proper packing.
- 5. Water supply point should be close to the installation place.
- 6. Standard water inlet pipe available with the washing machine is 1.5 meter.
- 7. Check the type of tap
- 8. Check the available water pressure (for fully automatic and front-loading machine).
- 9. Outer packaging of the washing machine must be removed properly
- 10. Bend the machine towards the back and slowly take it off the bottom packer.
- 11. Pull out the bottom packer in the front beneath the machine
- 12. Remove the bowl packer by lifting the lid
- 13. Take out all the accessories and hoses
- 14. Safely keep the bowl packer and the bottom packer for future concern

To install the drain hose:

- 1. Pull the exposed part of the hose to pull out the drain hose out from the back of the washing machine
- 2. Fit the host guide to the drain hose to guide the drain hose over the standpipe
- 3. From the end of the guide, the extension of the drain hose should not exceed more than 20 mm
- 4. The length of the drain hose can be trimmed according to the requirement.
- 5. The drain hose can be placed in the standpipe or a tub.







To install the inlet hose:

- 1. Both the ends of the inlet hoses are connected to the taps.
- 2. If the inlet hoses are colour coded, then the red end is connected to the hot end and the blue end is conneced to the cold end.
- 3. The inlet hoses with elbow ends are connected to the respective hot and cold inlet valves of the machine.
- 4. The minimum requirement for the height of the taps in washing machines is 1150 mm.



Tap End

Inlet Hose Ends

6.3.4 Check the Functioning

After installing all the required accessories of the washing machine, it is mandatory to check the working of the appliance, to identify problems (if any) and to ensure its smooth functioning.

A field technician can achieve productivity and quality in work by educating the customer about the proper place where the machine is to be installed as per the guidelines mentioned in the installation manual given by the company. Also, the technician should tell the customer about the use of the volatage regulators and to switch off the machine during voltage fluctuations.

Providing Guidance to the Customer

Demonstrating a product is a way of promoting or showing the operation of equipment to the users. The goal of demonstrating the workability of equipment is to make them aware of the operation of that equipment and answer their queries related to its operation.

There is nothing better than a good demonstration session. It is only after a demonstration (demo) that the users understand the operation of particular equipment.

There are a few rules which must be considered while preparing for the demo. The following figure lists these rules:

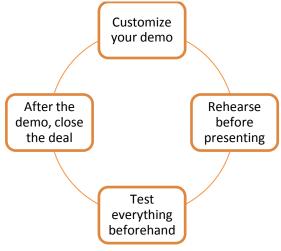


Fig. 6.3.3: Rules to be followed to prepare for an effective demo

In addition, it is the responsibility of a field technician to make the customers aware of the user manual and tell them how to read it.

It can be a user manual which contains instructions for the installation of a washing machine or it may be a help book giving solutions to common problems that may arise with equipment. The following figure lists the steps for reading a manual:

Step 1: Determine information	One must be able to determine and read as per the specified requirement rather than reading the entire document.
Step 2: Scan the document	Scan the document to determine its layout style and get a better idea about the manner in which the content is presented.
Step 3: Find information	Look up for the required information using headings, index or the table of contents.
Step 4: Take notes	It is essential to take notes for any important topic that one may come accross while reading the document. Tips and warnings mentioned in the manual should also be noted.
Step 5: Use glossary	A person may come across technical terms while reading the document. Meanings of such terms can be looked up in the glossary section at the end of the manual.

Fig. 6.3.4: Steps to read a manual

Customers can have varied queries and issues. It the core responsibility of the field technician to respond to them.

Take Feedback from Customer

Just like it is essential to address issues within the facility, it is also important to get feedback of the customer. The customer is always special, and the customer's feedback is the most important thing for an organization.

The procedure as shown in the following figure should be followed:



Fig. 6.3.5: Procedure to be followed for taking customer feedback

The time taken to resolve an issue and the difficulties that a customer encountered while communicating the problem should be understood. The misunderstandings observed during the interaction should be clearly documented.

The methods of interaction and behavioural aspects also need to be considered in drawing conclusions after each task or problem handling routine. Getting honest feedback from the clients helps to improve the organizational functioning.

The field technician can get a feedback form filled by the customer at the facility.

UNIT 6.4: Troubleshooting Common Problems

Unit Objectives



At the end of this unit, you will be able to:

- 1. Understand symptoms and identify faults in the washing machine
- 2. Understand the repairing procedure of washing machine
- 3. Identify faulty part and perform troubleshooting

6.4.1 Understanding Symptoms and Identifying Fault

A field technician should know how to identify faults and symptoms related to that. The following figure shows steps required to understand symptoms and identify the fault:

Interact with the customer to identify the fault and then inspect the washing machine accordingly

Based on the interaction with the customer, identify the cycle in which the problem has occured, whether it is fill, wash/rinse or drain/spin cycle

Switch off the machine before inspecting and repairing the fault Disassemble the unit and check the lid switch, inlet valves, control/service panel and the temperature selector switch for diagnosing the fault.

Carry out some fault inspection tests such as volt ampere test, continuity test and power supply interaction test.

Inspect various parts such as drain hose, inlet valves, washer drum, pressure and the pressure sensor

Identify the electrical faults in the unit by inspecting each component in sequence following the electrical path of the unit

Inspect all the parts of the unit such as motors, solenoids, transformer, pulley, belt system and the motor starting switch

If the problem remains unidentified at site, send it to the concerned company for diagnosis

Fig. 6.4.1: Steps required to understand the symptoms and identify the fault

6.4.2. Repairing Washing Machine

The following table shows area of problem and its solutions:

Areas of Problem	Solution
Water source problem	Ensure that there are no crimps in the water hose and also the water supply should be turned on
Accumulation of soap inside the unit	Clean the accumulated soap and run the unit for a complete wash cycle

Problem in components of the unit	Replace the faulty components
-----------------------------------	-------------------------------

Fig. 6.4.2: Repairing washing machine

If the faulty module or part cannot be replaced, make sure to replace it during the second visit with a functional one.

6.4.3 Identify the Faulty Part and Perform Troubleshooting -

Troubleshooting refers to repair of faulty products or processes. It begins with searching for the source of a problem and ends with finding the solution for that problem to ensure that the product or process functions properly. Good troubleshooting consists of the following four steps:

- Identification of the symptoms
- Elimination of the causes of a problem
- Verification of the solution
- Restoration of the product or process

In other words, the first thing to do is to identify the symptoms that are causing a failure in the system. The next step is to diagnose the cause of that malfunction, till a solution is reached. This is followed by returning the product to its original state.

The following table lists some common problems and their solutions:

Reason	Description	Deal Method
Fill overtime	No water level change in three minutes during the washing cycle.	Check the water inlet valve Air pipe gets broken or bad airproof. Check to have hung up the drain hose.
Lots of water in the tub	The water level is higher than the overflow water level when the washing machine is at power on, delay fault or running condition.	Check the water inlet valve, the drain pump and the PC board.
Overflow	The water level is higher than the overflow water level.	The water inlet valve fails.
Bad connection of drain pump	The PC board cannot get the drain pump signal.	Check the drain pump wire connection.

Drain overtime	The water level does not change in three minutes during drain.	Check the drain pump. Check the filter of the drain pump to prevent jam. Check the drain hose to prevent jam.
Cannot lock the door lock	Fails to lock the door lock for six times when the PC board tries to lock the door lock after you press the START key.	Check the door hook and the door lock to get correct location.
Cannot unlock the door lock	Fails to unlock the door lock six times.	Check the door lock.
Water level sensor fail	The frequency of the water level sensors is out of the specification.	Check the water level sensor.
Temperature sensor fail	Temperature sensor (NTC) gets broken.	Check the temperature sensor (NTC).
The motor cannot drive	The motor fails to drive for 3 times.	Check the PC board and the motor.
No speed feedback signal	The PC board cannot get feedback signal when the motor drives.	Check the speed feedback line of the motor to prevent fall off.

Fig. 6.4.3: Common problem and solutions

Some common problem and their solutions:

Problems	Check
Washing machine is not working	 Close the lid. Check the washer by pressing the start/pause button
	Check the water pressureCheck the source of the water supply
Problem in spin basket and drain hose	 Remove the drain hose and soak it in hot water. Also, add hot water in the spin basket and let it rest for 10 mins.
	Clean the drain hose connector by putting hot towel on it.
	 After cleaning, connect the drain hose again and check its functioning.

Spinning does not work	Add hot water in the spin basket and let it rest for 10 minutes
	 Make sure that the laundry is evenly spread in the spin basket
	 If not, spread the clothes properly and then check its functioning.
Error in child lock	 This lock is used for the safety of children to prevent them from drowning inside the wash tub. Check for the error message which will display "CL" or "DE". If this error message is displayed on the screen, the water will be drained with an alarm. After the water is drained completely, turn off the machine and then turn it on. The error message will be removed, and the machine will operate normally.
Water has overflowed	Restart after spinning.If the error sign is still seen, call the agency.
The water leaks at the wate supply hose connector.	 Clean the filter net by brushing with a toothbrush. In case, the water supply is shut down, turn off the water valves.

Fig. 6.4.4: Common troubleshooting









7. Soft Skills and Work Ethics

Unit 7.1 – Effective Communication and Coordination at Work

Unit 7.2 – Working Effectively and Maintaining Discipline at Work

Unit 7.3 – Maintaining Social Diversity at Work





By the end of this unit, participants will be able to:

- 1. State the importance of work ethics and workplace etiquette
- 2. State the importance of effective communication and interpersonal skills
- 3. Explain ways to maintain discipline in the workplace
- 4. Discuss the common reasons for interpersonal conflict and ways of managing them effectively.

UNIT 7.1: Efffecte Communicacation aCoordinainati t Work

Unit Objectives | ©



By the end of this unit, participants will be able to:

- 1. Work efffectely at the workplace.
- 2. Demonstrate practices related to gender and PwD sensitazation.

7.1.1 Importance of Work Ethics and Workplace Etiquette

Workplace ethics are a set of moral and legal guidelines that organizations follow. These guidelines influence the way customers and employees interact with an organization. Workplace ethics essentially guide how an organization serves its clients and treats its employees.

For example, if a company seeks to fulfil the promises it makes, it may develop processes and set up a robust support system to address this policy and build customer/client loyalty. To achieve this goal, the company may implement specific incentive programs for employees to encourage them to produce high-quality work and ensure the organization fulfils the promises it makes to its clients/ customers.

Many organizations, often the large ones, set detailed ethical codes to guide their operations and control how the organizational processes impact the stakeholders. These ethics usually help organizations maintain certain standards of responsibility, accountability, professionalism and among others, as they navigate through different challenges and day-to-day circumstances. By following these guidelines, organizations often experience several benefits that improve the lives of stakeholders, such as customers, employees, leaders, etc.

Examples of Common Workplace Ethics



Fig. 7.1.1 Examples of Common Workplace Ethics

Workplace ethics are essential for a successful organization with a satisfied and loyal team. High ethical standards help in ensuring all stakeholders, such as customers, investors, employees, and other individuals involved in the workplace operations, feel the organization is safeguarding their interests. By creating and implementing ethical guidelines, organizations can keep the best interests of their employees in mind while maintaining a positive influence on those they impact through their processes. As a result, employees maintain the organization's best interests by being ethical in their daily work duties. For example, fairly-treated employees of an organization who understand the organization's commitments to environmental sustainability are usually less likely to behave in a manner that causes harm to the environment. Thus, they help maintain a positive public image of the organization. It means that workplace ethics help in maintaining reciprocal relationships that benefit organizations at large and the individuals associated with and influenced by the organizational policies.

Benefits of Workplace Ethics

There are various benefits of implementing workplace ethics. When organizations hold themselves to high ethical standards, leaders, stakeholders, and the general public can experience significant improvements. Following are some of the key benefits of employing ethics in the workplace:



Fig. 7.1.2 Benefits of Workplace Ethics

7.1.2 Interpersonal Communication

Interpersonal communication is a process that involves sharing ideas and emotions with another person, both - verbally and non-verbally. It is essential to interact effectively with others in both personal and professional lives. In professional life or the workplace, strong interpersonal skills play a crucial role in achieving effective collaboration with colleagues.

Interpersonal Skills

Interpersonal skills, in other terms, are known as people skills, which are used to communicate and interact with others effectively. These are soft skills one uses to communicate with others and understand them. One uses these skills in daily life while interacting with people

Examples of Interpersonal Skills



Fig 7.1.3 Examples of Interpersonal Skills

Numerous interpersonal skills involve communication. Communication can be verbal, such as persuasion or tone of voice — or non-verbal, such as listening and body language.

Importance of Interpersonal Skills

Interpersonal skills are essential for communicating and collaborating with groups and individuals in both personal and professional life. People with strong interpersonal skills often are able to build good relationships and also tend to work well with others. Most people often enjoy working with co-workers who have good interpersonal skills.

Among other benefits of good interpersonal skills is the ability to solve problems and make the best decisions. One can use the ability to understand others and good interpersonal communication skills to find the best solution or make the best decisions in the interest of everyone involved. Strong interpersonal skills help individuals work well in teams and collaborate effectively. Usually, people who possess good interpersonal skills also tend to be good leaders, owing to their ability to communicate well with others and motivate the people around them.

Interpersonal communication is the key to working in a team environment and working coollectely to achieve shared goals. Following are the interperso

Verbal Communication

The ability to speak clearly, appropriately and confidently can help one communicate effectively with others. It is vital to select the appropriate vocabulary and tone for the target audience.

For example – one should speak formally and professionally in the work environment, while informal language is acceptable in an intimate environment with close friends and family. Also, one should avoid using complex or technical language while communicating with an audience that may not be familiar with it. Using simple language in a courteous tone helps achieve better communication, irrespective of the audience.

Active Listening

Active listening is defined as the ability to pay complete or undivided attention to someone when they speak and understand what they are saying. It is important for effective communication because without understanding what the speaker is saying, it becomes difficult to carry forward a conversation. One should ensure to use appropriate verbal and non-verbal responses, e.g. eye contact, nodding, or smiling, to show interest in what the speaker says. Active listening is also about paying attention to the speaker's body language and visual cues. Asking and answering questions is one of the best ways to demonstrate an interest in conversing with the other person.

Active listening is critical for communicating effectively without ambiguity. It helps one understand the information or instructions being shared. It may also encourage co-workers to share their ideas, which ultimately helps achieve collaboration.

Body Language

One's expression, posture, and gestures are as important as verbal communication. One should practice open body language to encourage positivity and trust while communicating. Open body language includes - maintaining eye contact, nodding, smiling and being comfortable. On the other hand, one should avoid closed body language, e.g. crossed arms, shifting eyes and restless behaviour.

Empathy

Empathy is the ability to understand the emotions, ideas and needs of others from their point of view. Empathy is also known as emotional intelligence. Empathetic people are good at being aware of others' emotions and compassionate when communicating with them. Being empathetic in the workplace can be good to boost the morale of employees and improve productivity. By showing empathy, one can gain the trust and respect of others.

Conflict Resolution

One can use interpersonal communication skills to help resolve disagreements and conflicts in the workplace. This involves the application of negotiation and persuasion skills to resolve arguments between conflicting parties. It is also important to evaluate and understand both sides of the argument by listening closely to everyone involved and finding an amicable solution acceptable to all.

Good conflict resolution skills can help one contribute to creating a collaborative and positive work environment. With the ability to resolve conflicts, one can earn the trust and respect of co-workers.nal communicationskills that vital for success at work:

Teamwork

Employees who communicate and work well in a team often have better chances of achieving success and common goals. Being a team player can help one avoid conflicts and improve productivity. One can do this by offering to help co-workers when required and asking for their feedback and ideas. When team members give their opinions or advice, one should positively receive and react to the opinions/advice. One should be optimistic and encouraging when working in groups.

Improving Interpersonal Skills

One can develop interpersonal skills by practising good communication and setting goals for improvement. One should consider the following tips to improve their interpersonal skills:

- One should ask for feedback from co-workers, managers, family or friends to figure out what needs improvement concerning their interpersonal skills.
- One can identify the areas of interpersonal communication to strengthen by watching others.
- One can learn and improve interpersonal skills by observing co-workers, company leaders and
 professionals who possess good interpersonal skills. This includes watching and listening to them to
 note how they communicate and the body language used by them. It is vital to note their speed of
 speaking, tone of voice, and the way they engage with others. One should practice and apply such
 traits in their own interactions and relationships.
- One should learn to control their emotions. If stressed or upset, one should wait until being calm to have a conversation. One is more likely to communicate effectively and confidently when not under stress.
- One can reflect on their personal and professional conversations to identify the scope of improvement and learn how to handle conversations better or communicate more clearly. It helps to consider whether one could have reacted differently in a particular situation or used specific words or positive body language more effectively. It is also vital to note the successful and positive interactions to understand why they are successful.
- One should practice interpersonal skills by putting oneself in positions where one can build relationships and use interpersonal skills. For example, one can join groups that have organized meetings or social events. These could be industry-specific groups or groups with members who share an interest or hobby.
- Paying attention to family, friends and co-workers and making efforts to interact with them helps a
 lot. One should complement their family, friends and co-workers on their good ideas, hard work and
 achievements. Trying to understand someone's interests and showing interest in knowing them can
 help one build strong interpersonal skills. Offering to help someone, especially in difficult situations,
 helps build stronger and positive workplace relationships.
- One should avoid distractions, such as a mobile phone, while interacting with someone. Giving
 someone full attention while avoiding distractions helps achieve a clear exchange of ideas. By
 listening with focus, one can understand and respond effectively.

- One can attend appropriate courses on interpersonal skills or sign up for workshops at work to improve interpersonal skills. One can find many resources online also, such as online videos.
- For personal mentoring, one can approach a trusted family member, friend, co-worker, or current/ former employer. A person one looks up to with respect and admires is often a good choice to be selected as a mentor. One can even hire a professional career or communication coach.

Interpersonal communication skills often help one boost their morale, be more productive in the workplace, complete team projects smoothly and build positive and strong relationships with coworkers.

– Notes 📋 –	
- Notes =	

UNIT 7.2: Working Efffectely and Maintaining Discipline at Work

Unit Objectives | ©



By the end of this unit, participants will be able to:

- · Discuss the importance of following organizational guidelines for dress code, time schedules, language usage and other behavioural aspects
- Explain the importance of working as per the workflow of the organization to receive instructions and report problems
- · Explain the importance of conveying information/instructions as per defined protocols to the authorised persons/team members
- Explain the common workplace guidelines and legal requirements on non-disclosure and confidentiality of business-sensitive information
- · Describe the process of reporting grievances and unethical conduct such as data breaches, sexual harassment at the workplace, etc.
- Discuss ways of dealing with heightened emotions of self and others.

7.2.1 Discipline at Work

Discipline is essential for organizational success. It helps improve productivity, reduce conflict and prevent misconduct in the workplace. It is important to have rules concerning workplace discipline and ensure that all employees comply with them. In the absence of discipline, a workplace may experience conflicts, bullying, unethical behaviour and poor employee performance. An efficient workplace disciplinary process helps create transparency in the organization. Benefits of disciplinary standards:

All employees follow the same rules which helps establish uniformity and equality in the workplace

Managers and supervisors have defined guidelines on what accon to take while initi atg disciplinary y aon

With well-defined and enforced disciplinary rules, an organiizaon can avoid various safety, security, rupati nal risks

Fig 7.2.1 Benefits of Disciplinary Standards

Maintaining an organized and cohesive workforce requires maintaining discipline in both personal and professional behaviour. It is important to follow the appropriate measures to keep employees in line without affecting their morale.

Defining Discipline

The first and crucial step in maintaining workplace discipline is to define what is meant by discipline. It helps to evaluate common discipline problems and devise guidelines for handling them effectively.

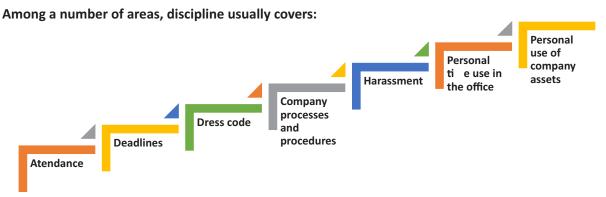


Fig 7.2.2 Examples of Workplace Discipline

According to demography and local issues, it may also include substance use and related issues.

It is vital for a workplace to have an employee handbook or company policy guide, to serve as a rulebook for employees to follow. The employee handbook/ company policy guide should be reviewed and updated periodically according to any issues or areas, or concerns identified concerning workplace discipline. Such manuals should also cover all the laws and regulations governing workplace behaviour.

Defining and documenting workplace rules aids in their implementation, ensuring little or no ambiguity. All employees in a workplace should also have easy access to the workplace guidelines so that they can refer to them to get clarity whenever required. To maintain discipline at work, it is also critical to ensure uniform application of workplace guidelines to all employees without exception.

7.2.2 Employee Code of Conduct

The employee code of conduct manual serves as a guide for employees to inform them regarding the behaviour expected from them at work. It helps create a good work environment with consistent behaviour from employees. The manual should list examples of acceptable and not acceptable behaviours at work. The code of conduct should be discussed with employees so that they have the clarifications required.

For example, an organization may create guidelines concerning the conduct with clients to ensure no contact is made with them except for business purposes, also prescribing the use of appropriate means of communication.

Employees should have a clear understanding concerning their job responsibilities and the behaviour expected from them with all stakeholders, e.g. company personnel, clients and associated third parties. It is critical to have documented guidelines for employees to follow concerning all aspects of work. It should also document the disciplinary action to be followed in case of non-compliance, e.g. verbal and

then written warning, temporary suspension or eventual termination of service in case of repeated non-compliance with the employee code of conduct. Employees should know what the company rules are and what will happen if they break the rules. However, disciplinary action should be initiated only when reasonably required to avoid its misuse for employee harassment.

There should also be an effective mechanism for employees to raise their concerns/ grievances and have them addressed while maintaining privacy, as required, e.g. raising concerns regarding the behaviour of a co-worker.

The employee code of conduct manual must be duly reviewed and approved by the concerned stakeholders, such as the Human Resources (HR) department and company executives.

7.2.3 Interpersonal Conflicts

Interpersonal conflict is any type of conflict between two or more people. These are found in both - personal and professional relationships - among friends, family, and co-workers. In the workplace, interpersonal conflict is often observed when a person or group of people interfere with another person's attempts at completing assignments and achieving goals. It is critical to resolve conflicts in the workplace to boost the morale of employees, repair working relationships among them, and improve customer satisfaction.

Reasons for Workplace Conflicts

Workplace conflicts are often observed when two or more people have different points of view. This can happen between managers, co-workers, or clients and customers. In general, interpersonal conflicts are caused by a lack of communication or unclear communication.

Some of the leading reasons for workplace conflicts are:

- · Difference in values
- Personality clashes
- Poor communication

Example of poor communication — if a manager reassigns a task to another employee without communicating with the employee to whom it was originally assigned, interpersonal conflict can arise among them. This may potentially make the first employee, i.e. who was originally assigned the task, feel slighted and mistrusted by the manager. It may even cause animosity in the first employee toward the employee who has now been assigned the task.

Types of Interpersonal Conflict

Following are the four types of interpersonal conflicts:

a. Policy-related interpersonal conflict

When a conflict relates to a decision or situation that involves both parties, it can be called a policy-related interpersonal conflict. Example – two people or groups working on the same project, trying to adopt different approaches. To resolve policy-related interpersonal conflicts, the parties involved should try to look for a win-win situation or make a compromise. This is especially critical to resolve trivial issues so that work is not affected and common goals are achieved.

b. Pseudo-conflicts

Pseudo-conflict arises when two people or groups want different things and cannot reach an agreement. Pseudo-conflicts usually involve trivial disagreements that tend to hide the root of the issue.

c. Ego-related interpersonal conflicts

In ego conflicts, losing the argument may hurt or damage a person's pride. Sometimes ego conflicts arise when a number of small conflicts pile up on being left unresolved. To resolve ego-related conflicts, it's best to find the root of the issue and work towards a resolution.

d. Value-related interpersonal conflicts

Sometimes conflicts may occur between people when they have different value systems. Such conflicts can be difficult to identify initially, making the people involved think the other party is being disagreeable or stubborn, wherein they just have different values. Some co-workers may highly value their personal/ family time after office that they may be unreachable to clients during non-office hours, while others may place a high value on client satisfaction and may still be available for clients during non-office hours. Conflict may arise among such people when they may be required to coordinate to help a client during after-office hours. Value-related interpersonal conflicts are often difficult to settle since neither party likes to compromise.

Resolving Interpersonal Conflicts

Conflicts are usually likely in the workplace; they can, however, be prevented. Often resolving interpersonal conflicts through open communication helps build a stronger relationship, paving the way for effective coordination and success. Some ways to resolve interpersonal conflict:

• **Communication** - A great way to resolve interpersonal conflicts is for the opposing parties to listen to one another's opinions and understand their viewpoints. Meeting in person and keeping the conversation goal-oriented is important. One can have effective communication by following some measures, e.g. staying on the topic, listening actively, being mindful of the body language, maintaining eye contact, etc.

- Active Listening One should patiently listen to what the other person is saying without interrupting
 or talking over them. It helps one display empathy and get to the root of the issue. Asking questions
 to seek clarification when required helps in clear communication and conveys to the other person
 that one is listening to them. Practising active listening is a great way to improve one's
 communication skills.
- **Displaying Empathy** Listening attentively and identifying the anxieties/ issues of co-workers is a great way to show empathy and concern. It is essential to understand their feelings and actions to encourage honesty and avoid future conflict.
- Not Holding Grudges With different types of people and personalities in a workplace, it is common
 for co-workers to have conflicts. It is best to accept the difference in opinions and move on. Being
 forgiving and letting go of grudges allows one to focus on the positive side of things and perform
 better at work.

Work-related interpersonal conflicts can be complicated because different people have different leadership styles, personality characteristics, job responsibilities and ways in which they interact. One should learn to look above interpersonal conflicts, resolving them to ensure work goals and environment are not affected.

7.2.4 Importance of Following Organizational Guidelines

Policies and procedures or organizational guidelines are essential for any organization. These provide a road map for the operations of the organization. These are also critical in ensuring compliance with the applicable laws and regulations by guiding the decision-making process and business operations.

Organizational guidelines help bring uniformity to the operations of an organization, which helps reduce the risk of unwanted and unexpected events. These determine how employees are supposed to behave at work, which ultimately helps the business achieve its objectives efficiently.

However, organizational guidelines are ineffective and fail to serve their purpose if they are not followed. Many people don't like the idea of following and abiding by specific guidelines. Such people should be made to understand the benefits of following the organizational guidelines. Some of the key benefits are given below:

With well-defined organizational guidelines in place, no individual can act arbitrarily, irrespective of their position in the organization. All individuals will know the pros and cons of taking certain actions and what to expect in case of unacceptable behaviour. Benefits of following organizational guidelines:

Consistent processes and structures - Organization guidelines help maintain consistency in
operations, avoiding any disorder. When all employees follow the organizational guidelines, an
organization can run smoothly. These ensure that people in different job roles operate as they are
supposed to, knowing what they are responsible for, what is expected of them, and what they can
expect from their supervisors and co-workers. With clarity in mind, they can do their jobs with
confidence and excellence. With every person working the way intended, it's easy to minimise
errors.

With all the staff following organizational guidelines, the organization has a better scope of using time and resources more effectively and efficiently. This allows the organization to grow and achieve its objectives.

- Better quality service By following organizational guidelines, employees perform their duties
 correctly as per the defined job responsibilities. It helps enhance the quality of the organization's
 products and services, helping improve the organization's reputation. Working with a reputable
 organization, employees can take pride in their work and know they are contributing to the
 reputation.
- A safer workplace When all employees follow organizational guidelines, it becomes easy to
 minimise workplace incidents and accidents. It reduces the liabilities associated with risks for the
 organization and limits the interruptions in operations. Employees also feel comfortable and safe in
 the workplace, knowing their co-workers are ensuring safety at work by following the applicable
 guidelines.

Different organizations may have different guidelines on dress code, time schedules, language usage, etc. For example – certain organizations in a client-dealing business requiring employees to meet clients personally follow a strict dress code asking their employees to wear formal business attire. Similarly, organizations operating in specific regions may require their employees to use the dominant regional language of the particular region to build rapport with customers and serve them better. Certain organizations, such as banks, often give preference to candidates with knowledge of the regional language during hiring.

Working hours may also differ from one organization to another, with some requiring employees to work extra compared to others. One should follow the organizational guidelines concerning all the aspects of the employment to ensure a cohesive work environment.

7.2.5 Workflow -

Workflow is the order of steps from the beginning to the end of a task or work process. In other words, it is the way a particular type of work is organised or the order of stages in a particular work process.

Workflows can help simplify and automate repeatable business tasks, helping improve efficiency and minimise the room for errors. With workflows in place, managers can make quick and smart decisions while employees can collaborate more productively.

Other than the order that workflows create in a business, these have several other benefits, such as:

• Identifying Redundancies - Mapping out work processes in a workflow allows one to get a clear, top-level view of a business. It allows one to identify and remove redundant or unproductive processes.

Workflow gives greater insights into business processes. Utilizing such useful insights, one can improve work processes and the bottom line of the business. In many businesses, there are many unnecessary and redundant tasks that take place daily. Once an organization has insight into its processes while preparing workflow, it can determine which activities are really necessary.

Identifying and eliminating redundant tasks creates value for a business. With redundant tasks and processes eliminated, an organization can focus on what's important to the business.

• Increase in Accountability and Reduction in Micromanagement - Micromanagement often causes problems in a business setting as most employees don't like being micromanaged, and even many managers don't like the practice. Micromanagement is often identified as one of the reasons why people quit their job.

However, the need for micromanagement can be minimized by clearly mapping out the workflow. This way, every individual in a team knows what tasks need to be completed and by when and who is responsible for completing them. This makes employees more accountable also.

With clearly defined workflow processes, managers don't have to spend much time micromanaging their employees, who don't have to approach the manager to know what the further steps are. Following a workflow, employees know what is going on and what needs to be done. This, in turn, may help increase the job satisfaction of everyone involved while improving the relationships between management and employees.

- Improved Communication Communication at work is critical because it affects all aspects of an
 organization. There are instances when the main conflict in an organization originates from
 miscommunication, e.g. the management and employees disagreeing on an aspect, despite
 pursuing the same objectives. Poor communication is a common workplace issue that is often not
 dealt with.
- This highlights why workflow is important. Workplace communication dramatically can increase
 with the visibility of processes and accountability. It helps make the daily operations smoother
 overall.

Better Customer Service - Customers or clients are central to a business. Therefore, it is imperative
to find and improve ways to improve customer experience. Relying on outdated manual systems
may cause customer requests or complaints to be overlooked, with dissatisfied customers taking
their business elsewhere. However, following a well-researched and defined workflow can help
improve the quality of customer service.

By automating workflows and processes, an organization can also reduce the likelihood of human error. This also helps improve the quality of products or services over time, resulting in a better customer experience.

7.2.6 Following Instructions and Reporting Problems

All organizations follow a hierarchy, with most employees reporting to a manager or supervisor. For organizational success, it is vital for employees to follow the instructions of their manager or supervisor. They should ensure they perform their duties as per the given instructions to help achieve the common objectives of the organization and deliver quality service or products. This consequently helps maintain the reputation of the organization.

It is also important to be vigilant and identify problems at work or with the organizational work processes. One should deal with the identified within their limits of authority and report out of authority problems to the manager/ supervisor or the concerned person for a prompt resolution to minimise the impact on customers/clients and business.

7.2.7 Information or D ta Sharing

Information or data is critical to all organizations. Depending on the nature of its business, an organization may hold different types of data, e.g. personal data of customers or client data concerning their business operations and contacts. It is vital to effective measures for the appropriate handling of different types of data, ensuring its protection from unauthorized access and consequent misuse.

One should access certain data only if authorised to do so. The same is applicable when sharing data which must be shared only with the people authorised to receive it to use it for a specific purpose as per their job role and organizational guidelines. For example — one should be extra cautious while sharing business data with any third parties to ensure they get access only to the limited data they need as per any agreements with them. It is also critical to monitor how the recipient of the data uses it, which should strictly be as per the organizational guidelines. It is a best practice to share appropriate instructions with the recipient of data to ensure they are aware of the purpose with which data is being shared with them and how they are supposed to use and handle it. Any misuse of data must be identified and reported promptly to the appropriate person to minimise any damage arising out of data misuse.

These days most organizations require their employees and business partners or associated third parties to sign and accept the relevant agreement on the non-disclosure of business-sensitive information. In simple terms, business-sensitive information is confidential information. It is proprietary business information collected or created during the course of conducting business, including information about the business, e.g. proposed investments, intellectual property, trade secrets, or plans for a merger and information related to its clients. Business-sensitive information may sometimes also include information regarding a business's competitors in an industry.

The release of business-sensitive information to competitors or the general public poses a risk to a business. For example, information regarding plans for a merger could be harmful to a business if a competitor gets access to it.

7.2.8 Reporting Issues at Work

Most organizations have defined guidelines on appropriate reporting processes to be followed for reporting different types of issues. For example – one can report any grievances or dissatisfaction concerning co-workers to their manager/supervisor, e.g. data breaches or unethical conduct. If the concern is not addressed, then the employee should follow the organizational guidelines and hierarchy for the escalation of such issues that are not addressed appropriately.

For example – any concern related to sexual harassment at the workplace should be escalated to the concerned spokesperson, such as Human Resources (HR) representative, and if not satisfied with the action taken, it should be reported to the senior management for their consideration and prompt action.

7.2.9 Dealing with Heightened Emotions

Humans are emotional beings. There may be occasions when one is overwhelmed by emotions and is unable to suppress them. However, there may be situations when one must manage emotions well, particularly at work.

Stress in one's personal and professional life may often cause emotional outbursts at work. Managing one's emotions well, particularly the negative ones, is often seen as a measure of one's professionalism. Anger, dislike, frustration, worry, and unhappiness are the most common negative emotions experienced at work.

Ways to manage negative emotions at work:

• Compartmentalisation – It's about not confining emotions to different aspects of one's life. For example, not letting negative emotions from personal life affect work-life and vice versa. One should try to leave personal matters and issues at home. One should train their mind to let go of personal matters before reaching work. Similarly, one can compartmentalise work-related stresses so that negative emotions from work don't affect one's personal life.

- Deep breathing and relaxation Deep breathing helps with anxiety, worry, frustration and anger. One should take deep breaths, slowly count to ten inhaling and exhaling until one calms down. One can also take a walk to calm down or listen to relaxing music. Talking to someone and sharing concerns also helps one calm down.
- The 10-second rule This is particularly helpful in controlling anger and frustration. When one feels their temper rising, they should count to 10 to calm down and recompose. If possible, one should move away to allow temper to come down.
- **Clarify** It is always good to clarify before reacting, as it may be a simple case of misunderstanding or miscommunication.
- **Physical activity** Instead of losing temper, one should plan to exercise, such as running or going to the gym, to let the anger out. Exercise is also a great way to enhance mood and release any physical tension in the body.
- **Practising restraint** One should avoid replying or making a decision when angry, not allowing anger or unhappiness to cloud one's judgement. It may be best to pause any communication while one is angry, e.g. not communicating over email when angry or upset.
- **Knowing one's triggers** It helps when one is able to recognise what upsets or angers them. This way, one can prepare to remain calm and plan their reaction should a situation occur. One may even be able to anticipate the other party's reaction.
- **Be respectful** One should treat their colleagues the same way one would like to be treated. If the other person is rude, one need not reciprocate. It is possible to stay gracious, firm and assertive without being aggressive. Sometimes, rude people back away when they don't get a reaction from the person they are arguing with.
- Apologise for any emotional outburst Sometimes, one can get overwhelmed by emotions, reacting with an emotional outburst. In such a case, one should accept responsibility and apologise immediately to the affected persons without being defensive.
- Doing away with negative emotions It is recommended to let go of anger, frustration and unhappiness at the end of every workday. Harbouring negative emotions affects one emotionally, affecting their job performance also. Engaging in enjoyable activities after work is a good stress reliever.

– Notes 📋 –	
- Notes =	

UNIT 7.3: Maintaining Social Diversity at Work

Unit Objectives ©



By the end of this unit, participants will be able to:

- 1. Explain the concept and importance of gender sensitivity and equality.
- 2. Discuss ways to create sensitivityfor different genders and Persons with h Disabiliti(PwD).

7.3.1 Gender Sensitivity -

Gender sensitivity is the act of being sensitive towards people and their thoughts regarding gender. It ensures that people know the accurate meaning of gender equality, and one's gender should not be given priority over their capabilities.



Fig 7.3.1 Gender Equality

Women are an important source of labour in many sectors, yet they have limited access to resources and benefits. Women should receive the same benefits and access to resources as men. A business can improve its productivity and quality of work by providing better support and opportunities to women.

Important Terms

- Gender Sensitivity- Gender sensitivity is the act of being sensitive to the ways people think about
- · Gender Equality It means persons of any gender enjoy equal opportunities, responsibilities, and rights in all areas of life.
- Gender Discrimination It means treating an individual unequally or disadvantageously based on their gender, e.g. paying different wages to men and women for similar or equal job positions.

Strategies for Enhancing Gender Equity

To enhance gender equity, one should:

- Follow gender-neutral practices at all levels at work.
- Participate together in decision-making.
- Help in promoting women's participation in different forums.
- · Assist women in getting exposure to relevant skills and practices.
- · Assist women in capacity building by mentoring, coaching or motivating them, as appropriate.
- Assist in the formation and operation of women support groups.
- Assist in the implementation of women-centric programmes.
- Combine technical training with reproductive health and nutrition for coffee farming households.
- · Assist in making a work environment that is healthy, safe, and free from discrimination.

Bridging Gender Differences

Men and women react and communicate very differently. Thus, there are some work differences as both genders have their style and method of handling a situation.

Although, understanding and maturity vary from person to person, even between these genders, based on their knowledge, education, experience, culture, age, and upbringing, as well as how one's brain functions over a thought or problem.

In order to bridge the gap, one should:

- Not categorize all men and women in one way.
- Be aware of the verbal and non-verbal styles of communication of every gender to avoid any miscommunication and work better.
- Be aware of partial behaviour and avoid it.
- Encourage co-workers of different genders to make room by providing space to others.

Ways to reduce Gender Discrimination

- · Effective steps against sexual harassment by the concerned authorities and general public.
- Gender stereotypes are how society expects people to act based on their gender. This can only be reduced by adopting appropriate behaviour and the right attitude.
- Objectification of females must be abolished.

Ways to Promote Gender Sensitivity in the Workplace

Practices that promote gender diversity should be adopted and promoted.

- All genders should receive equal responsibilities, rights, and privileges.
- All genders should have equal pay for similar or the same job roles/ positions.
- · Strict and effective workplace harassment policies should be developed and implemented.
- An open-minded and stress-free work environment should be available to all the employees, irrespective of their gender.
- Women should be encouraged to go ahead in every field of work and assume leadership roles.
- Follow appropriate measures for women's empowerment.
- Men should be taught to be sensitive to women and mindful of their rights.

7.3.2 PwD Sensitivity -

Some individuals are born with a disability, while others may become disabled due to an accident, illness or as they get old. People with Disabilities (PwD) may have one or more areas in which their functioning is affected. A disability can affect hearing, sight, communication, breathing, understanding, mobility, balance, and concentration or may include the loss of a limb. A disability may contribute to how a person feels and affect their mental health

Important Terms

•Persons with Disabilities (PwD) – Persons with Disabilities means a person suffering from not less than 40% of any disability as certified by a medical authority.

·Types of Disability:

- a. Blindness Visually impaired
- b. Low Vision
- c. Leprosy Cured
- d. Hearing impairment
- e. Locomotor disability
- f. Mental retardation
- g. Mental illness

PwD Sensitivity

PwD sensitivity promotes empathy, etiquette and equal participation of individuals and organizations while working with individuals with a disability, e.g. sensory, physical or intellectual.

Ways to be PwD Sensitive

To be sensitive to PwD, one should:

- Be respectful to all Persons with Disabilities (PwD) and communicate in a way that reflects PwD sensitivity.
- Always be supportive and kind towards a PwD with their daily chores.
- Be ready to assist a PwD to help them avail of any benefit/ livelihood opportunity/ training or any kind that helps them grow.
- Encourage and try to make things easier and accessible to PwD so that they can work without or with minimum help.
- Protest where feasible and report any wrong act/behaviour against any PwD to the appropriate authority.
- Learn and follow the laws, acts, and policies relevant to PwD.

Appropriate Verbal Communication

As part of appropriate verbal communication with all genders and PwD, one should:

- Talk to all genders and PwD respectfully, maintaining a normal tone of voice with appropriate
 politeness. It is important to ensure one's tone of voice does not have hints of sarcasm, anger, or
 unwelcome affection.
- Avoid being too self-conscious concerning the words to use while also ensuring not to use words that imply one's superiority over the other.
- Make no difference between a PwD and their caretaker. Treat PwD like adults and talk to them directly.
- Ask a PwD if they need any assistance instead of assuming they need it and offering assistance spontaneously.

Appropriate Non-verbal Communication

Non-verbal communication is essentially the way someone communicates through their body language. These include:

- Facial expressions The human face is quite expressive, capable of conveying many emotions without using words. Facial expressions must usually be maintained neutral and should change according to the situation, e.g. smile as a gesture of greeting.
- Body posture and movement One should be mindful of how to sit, stand, walk, or hold their head. For example one should sit and walk straight in a composed manner. The way one moves and carries self, communicates a lot to others. This type of non-verbal communication includes one's posture, bearing, stance, and subtle movements.

- Gestures One should be very careful with their gestures, e.g. waving, pointing, beckoning, or using
 one's hands while speaking. One should use appropriate and positive gestures to maintain respect
 for the other person while being aware that a gesture may have different meanings in different
 cultures.
- Eye contact Eye contact is particularly significant in non-verbal communication. The way someone looks at someone else may communicate many things, such as interest, hostility, affection or attraction. Eye contact is vital for maintaining the flow of conversation and for understanding the other person's interest and response. One should maintain appropriate eye contact, ensuring not to stare or look over the shoulders. To maintain respect, one should sit or stand at the other person's eye level to make eye contact.
- **Touch** Touch is a very sensitive type of non-verbal communication. Examples are handshakes, hugs, pat on the back or head, gripping the arm, etc. A firm handshake indicates interest, while a weak handshake indicates the opposite. One should be extra cautious not to touch others inappropriately and avoid touching them inadvertently by maintaining a safe distance.

Rights of PwD

PwD have the right to respect and human dignity. Irrespective of the nature and seriousness of their disabilities, PwD have the same fundamental rights as others, such as:

- Disabled persons have the same civil and political rights as other people
- Disabled persons are entitled to the measures designed to enable them to become as selfdependent as possible
- Disabled persons have the right to economic and social security
- Disabled persons have the right to live with their families or foster parents and participate in all social and creative activities.
- Disabled persons are protected against all exploitation and treatment of discriminatory and abusive nature.

Making Workplace PwD Friendly

- One should not make PwD feel uncomfortable by giving too little or too much attention
- One should use a normal tone while communicating with a PwD and treat them as all others keeping in mind their limitations and type of disability
- Any help should be provided only when asked for by a PwD
- One should help in ensuring the health and well-being of PwD.

Expected Employer Behaviour

Some of the common behavioural traits that employees expect from their employers are:

- Cooperation: No work is successful without cooperation from the employer's side. Cooperation helps to understand the job role better and complete it within the given timeline.
- Polite language: Polite language is always welcomed at work. This is a basic aspect that everybody
 expects.
- Positive Attitude: Employers with a positive attitude can supervise the work of the employees and act as a helping hand to accomplish the given task. A person with a positive attitude looks at the best qualities in others and helps them gain success.
- Unbiased behaviour: Employers should always remain fair towards all their employees. One should not adopt practices to favour one employee while neglecting or ignoring the other. This might create animosity among co-workers.
- Decent behaviour: The employer should never improperly present oneself before the employee. One should always respect each other's presence and behave accordingly. The employer should not speak or act in a manner that may make the employee feel uneasy, insulted, and insecure.

Exercise

- 1. List down three examples of workplace ethics.
- 2. List down three examples of interpersonal skills.
- 3. Identify two reasons for workplace conflicts.
- 4. Identify two ways of resolving interpersonal conflicts
- 5. List down two ways of dealing with heightened emotions at work.
- 6. List down two types of non-verbal communication.

Notes 🗒 ——		
Notes 🔳		









8. Basic Health and Safety Practices

Unit 8.1 - Workplace Hazards

Unit 8.2 - Fire Safety

Unit 8.3 - First Aid

Unit 8.4 - Waste Management



Key Learning Outcomes



By the end of this module, participa ts will be able to:

- 1. Discuss job-site hazards, risks and accidents
- 2. Explain the organizational safety procedures for maintaining electrical safety, handling tools and hazardous materials
- 3. Describe how to interpret warning signs while accessing sensitive work areas
- 4. Explain the importance of good housekeeping
- 5. Describe the importance of maintaining appropriate postures while lifting heavy objects
- 6. List the types of fire and fire extinguishers
- 7. Describe the concept of waste management and methods of disposing of hazardous waste
- 8. List the common sources of pollution and ways to minimize them
- 9. Elaborate on electronic waste disposal procedures
- 10. Explain how the administer appropriate first aid to victims in case of bleeding, burns, choking, electric shock, poisoning and also administer first aid to victims in case of a heart attack or cardiac arrest due to electric shock

UNIT 8.1: Workplace Hazards

Unit Objectives ©



By the end of this unit, participants will be able to:

- Discuss job-site hazards, risks and accidents
- Explain the organizational safety procedures for maintaining electrical safety, handling tools and hazardous materials
- Describe how to interpret warning signs while accessing sensitive work areas
- Explain the importance of good housekeeping
- Describe the importance of maintaining appropriate postures while lifting heavy objects
- Explain safe handling of tools and Personal Protective Equipment to be used.

8.1.1 Workplace Safety ———

Workplace safety is important to be established for creating a safe and secure working for the workers. The workplace has to be administered as per the rules of the Occupational Safety and Health Administration (OSHA). It refers to monitoring the working environment and all hazardous factors that impact employees' safety, health, and well-being. It is important to provide a safe working environment to the employees to increase their productivity, wellness, skills, etc.

The benefits of workplace safety are:

- Employee retention increases if they are provided with a safe working environment.
- · Failure to follow OSHA's laws and guidelines can result in significant legal and financial consequences.
- A safe environment enables employees to stay invested in their work and increases productivity.
- Employer branding and company reputation can both benefit from a safe working environment.

8.1.2 Workplace Hazards —

A workplace is a situation that has the potential to cause harm or injury to the workers and damage the tools or property of the workplace. Hazards exist in every workplace and can come from a variety of sources. Finding and removing them is an important component of making a safe workplace.

Common Workplace Hazards

The common workplace hazards are:

·Biological: The threats caused by biological agents like viruses, bacteria, animals, plants, insects and also humans, are known as biological hazards.

- **Chemical:** Chemical hazard is the hazard of inhaling various chemicals, liquids and solvents. Skin irritation, respiratory system irritation, blindness, corrosion, and explosions are all possible health and physical consequences of these dangers.
- **Mechanical:** Mechanical Hazards comprise the injuries that can be caused by the moving parts of machinery, plant or equipment.
- **Psychological:** Psychological hazards are occupational hazards caused by stress, harassment, and violence.
- **Physical:** The threats that can cause physical damage to people is called physical hazard. These include unsafe conditions that can cause injury, illness and death.
- **Ergonomic:** Ergonomic Hazards are the hazards of the workplace caused due to awkward posture, forceful motion, stationary position, direct pressure, vibration, extreme temperature, noise, work stress, etc.

Workplace Hazards Analysis

A workplace hazard analysis is a method of identifying risks before they occur by focusing on occupational tasks. It focuses on the worker's relationship with the task, the tools, and the work environment. After identifying the hazards of the workplace, organisations shall try to eliminate or minimize them to an acceptable level of risk.

Control Measures of Workplace Hazards

Control measures are actions that can be taken to reduce the risk of being exposed to the hazard. Elimination, Substitution, Engineering Controls, Administrative Controls, and Personal Protective Equipment are the five general categories of control measures.

- **Elimination:** The most successful control technique is to eliminate a specific hazard or hazardous work procedure or prevent it from entering the workplace.
- **Substitution:** Substitution is the process of replacing something harmful with something less hazardous. While substituting the hazard may not eliminate all of the risks associated with the process or activity, it will reduce the overall harm or health impacts.
- **Engineering Controls:** Engineered controls protect workers by eliminating hazardous situations or creating a barrier between the worker and the hazard, or removing the hazard from the person.
- Administrative Controls: To reduce exposure to hazards, administrative controls limit the length of time spent working on a hazardous task that might be used in combination with other measures of control.
- **Personal Protective Equipment:** Personal protective equipment protects users from health and safety hazards at work. It includes items like safety helmets, gloves, eye protection, etc.

8.1.3 Risk for a Drone Technician

A drone technician may require to repair the propeller, motor and its mount, battery, mainboards, processor, booms, avionics, camera, sensors, chassis, wiring and landing gear. A technician may face some risks while repairing the drones' equipment.

- The technician is susceptible to being physically harmed by propellers.
- Direct contact with exposed electrical circuits can injure the person.
- If the skin gets in touch with the heat generated from electric arcs, it burns the internal tissues.
- Major electrical injuries can occur due to poorly installed electrical equipment, faulty wiring, overloaded or overheated outlets, use of extension cables, incorrect use of replacement fuses, use of equipment with wet hands, etc.

8.1.4 Workplace Warning Signs

A Hazard sign is defined as 'information or instruction about health and safety at work on a signboard, an illuminated sign or sound signal, a verbal communication or hand signal.'

There are four different types of safety signs:

- Prohibition / Danger Alarm Signs
- Mandatory Signs
- Warning Signs
- And Emergency
- **1. Prohibition Signs:** A "prohibition sign" is a safety sign that prohibits behaviour that is likely to endanger one's health or safety. The colour red is necessary for these health and safety signs. Only what or who is forbidden should be displayed on a restriction sign.



Fig. 8.1.1. Prohibition arning Signs

2. Mandatory Signs:

Mandatory signs give clear directions that must be followed. The icons are white circles that have been reversed out of a blue circle. On a white background, the text is black.



Fig. 8.1.2. Mandatory Signs

3. Warning Signs

Warning signs are the safety information communicatiosigns. They are shown as a 'yellow colour triangle'.



Fig. 8.1.3. Warning Signs

4. Emergency Signs

The locationor routes to emergency ffacilitieare indicated by emergency signs. These signs have a green backdrop with a white emblem or writing. These signs convey basic informatioand frequently refer to housekeeping, company procedures, or logistics.

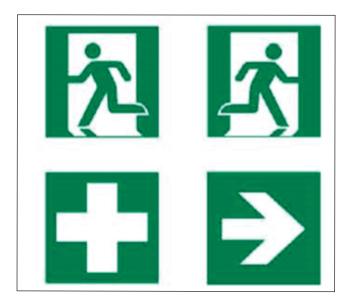


Fig. 8.1.4. Emergency Signs

8.1.5 Cleanliness in the Workplace

Workplace cleanliness maintenance creates a healthy, efficient and productive environment for the employees. Cleanliness at the workplace is hindered by some elements like cluttered desks, leftover food, waste paper, etc. A tidy workplace is said to improve employee professionalism and enthusiasm while also encouraging a healthy working environment.

Benefits of cleanliness in the workplace:

- 1. Productivity: Cleanliness in the workplace can bring a sense of belonging to the employees, also motivating and boosting the morale of the employees. This results in increasing their productivity.
- Employee Well-being: Employee well-being can be improved by providing a clean work environment. Employees use fewer sick days in a workplace where litter and waste are properly disposed of, and surfaces are cleaned regularly, resulting in increased overall productivity.
- 3. Positive Impression: Cleanliness and orderliness in the workplace provide a positive impression on both employees and visitors.
- 4. Cost saving: By maintaining acceptable levels of cleanliness in the workplace, businesses can save money on cleaning bills and renovations, which may become necessary if the premises are not properly kept.

Reasons for Cleaning the Workplace

- Cleaning of dry floors, mostly to prevent workplace slips and falls.
- Disinfectants stop bacteria in their tracks, preventing the spread of infections and illness.
- Proper air filtration decreases hazardous substance exposures such as dust and fumes.
- Light fixture cleaning improves lighting efficiency.
- Using environmentally friendly cleaning chemicals that are safer for both personnel and the environment.
- Work environments are kept clean by properly disposing of garbage and recyclable items.

8.1.6 Lifting and Handling of Heavy Loads

Musculoskeletal Injuries (MSIs), such as sprains and strains, can occur while lifting, handling, or carrying objects at work. When bending, twisting, uncomfortable postures and lifting heavy objects are involved, the risk of injury increases. Ergonomic controls can help to lower the risk of injury and potentially prevent it.

Types of injuries caused while lifting heavy objects:

- Cuts and abrasions are caused by rough surfaces.
- Crushing of feet or hands.
- Strain to muscles and joints

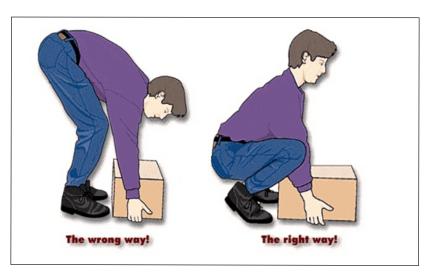


Fig. 8.1.5. Lifting loads echnique

Preparing to lift

A load that appears light enough to bear at first will grow increasingly heavier as one carries it further. The person carrying the weight should be able to see over or around it at all times.

The amount of weight a person can lift, depends on their age, physique, and health

It also depends on whether or not the person is used to lifting and moving hefty objects.

Common Causes of Back Injuries

The Most Common Causes of Back Injuries are:

- 1) Inadequate Training: The individual raising the load receives no sufficient training or guidance.
- **2)** Lack of awareness of technique: The most common cause of back pain is incorrect twisting and posture, which causes back strain.
- **3)** Load size: The load size to consider before lifting. If the burden is too much for one's capacity or handling, their back may be strained and damaged.
- **4) Physical Strength:** Depending on their muscle power, various persons have varied physical strengths. One must be aware of their limitations.
- **5) Teamwork:** The operation of a workplace is all about working together. When opposed to a single person lifting a load, two people can lift it more easily and without difficulty. If one of two people isn't lifting it properly, the other or both of them will suffer back injuries as a result of the extra strain.

Techniques for Lifting Heavy Objects

Technique		Demonstraton	
1.	Ensure one has a wide base of support before lifting the heavy object. Ensure one's feet are shoulder-width apart, and one foot is slightly ahead of the other at all times. This will help one maintain a good balance during the lifting of heavy objects. This is known as the Karate Stance.		
2.	Squat down as near to the object as possible when one is ready to lift it, bending at the hips and knees with the buttocks out. If the object is really heavy, one may wish to place one leg on the floor and the other bent at a straight angle in front of them.		

3. Maintain proper posture as one begin to lift upward. To do so, one should keep their back straight, chest out, and shoulders back while gazing straight ahead. 4. By straightening one's hips and knees, slowly elevate the thing (not the back). As one rises, they should extend their legs and exhale. Lift the heavy object without twisting the body or bending forward. 5. Do not lift bending forward. 6. Hold the load close to the body.

7. Never lift heavy objects above the shoulder



8. Use the feet (not the body) to change direction, taking slow, small steps.



9. Set down the heavy object carefully, squatting with the knees and hips only.



Table 8.1.1 Techniques for lifting he vy objects

8.1.7 Safe Handling of Tools

Workers should be trained on how to use tools safely. When tools are misplaced or handled incorrectly by workers, they can be dangerous. The following are some suggestions from the National Safety Council for safe tool handling when they are not in use:

- Never carry tools up or down a ladder in a way that makes it difficult to grip them. Instead of being carried by the worker, tools should be lifted up and down using a bucket or strong bag.
- Tools should never be tossed but should be properly passed from one employee to the next. Pointed tools should be passed with the handles facing the receiver or in their carrier.
- When turning and moving around the workplace, workers carrying large tools or equipment on their shoulders should pay particular attention to clearances.
- Pointed tools such as chisels and screwdrivers should never be kept in a worker's pocket. They can be
 carried in a toolbox, pointing down in a tool belt or pocket tool bag, or in hand with the tip always
 held away from the body.
- Tools should always be stored while not in use. People below are put in danger when tools are left sitting around on an elevated structure, such as a scaffold. In situations when there is a lot of vibration, this risk increases.

³Source:https://ww .braceability.ccom/blogs/articles/7-prop-heavavy-liftinechniques

8.1.8 Personal Protective Equipment

Personal protective equipment, or "PPE," is equipment worn to reduce exposure to risks that might result in significant occupational injuries or illnesses. Chemical, radiological, physical, electrical, mechanical, and other job dangers may cause these injuries and diseases.

PPE used for protection fom the following injuries are:

Injury Protecton	Protecton	PPE	
Head Injury Protecton	Falling or flying objects, stationary objects, or contact with electrical wires can cause impact, penetration, and electrical injuries. Hard hats can protect one's head from these injuries. A common electrician's hard hat is shown in the figure below. This hard hat is made of nonconductive plastic and comes with a set of safety goggles.		
Foot and Leg Injury Protecton	In addition to foot protection and safety shoes, leggings (e.g., leather) can guard against risks such as falling or rolling objects, sharp objects, wet and slippery surfaces, molten metals, hot surfaces, and electrical hazards.		
Eye and Face Injury Protecton	Spectacles, goggles, special helmets or shields, and spectacles with side shields and face shields can protect against the hazards of flying fragments, large chips, hot sparks, radiation, and splashes from molten metals. They also offer protection from particles, sand, dirt, mists, dust, and glare.		



Table 8.1.2. Personal protective equipment

Notes 🗒 ——		
Notes 🔳		

UNIT 8.2: Fire Safety

Unit Objectives ©



By the end of this unit, participants will be able to:

1. List the types of fire and fire e extinguiss.

8.2.1 Fire Safety —

Fire safety is a set of actions aimed at reducing the amount of damage caused by fire. Fire safety procedures include both those that are used to prevent an uncontrolled fire from starting and those that are used to minimise the spread and impact of a fire after it has started. Developing and implementing fire safety measures in the workplace is not only mandated by law but is also essential for the protection of everyone who may be present in the building during a fire emergency.

The basic Fire Safety Responsibilities are:

- To identify risks on the premises, a fire risk assessment must be carried out.
- Ascertain that fire safety measures are properly installed.
- Prepare for unexpected events.
- Fire safety instructions and training should be provided to the employees.

8.2.2 Respond to a Workplace Fire

- Workplace fire drills should be conducted on a regular basis.
- If one has a manual alarm, they should raise it.
- Close the doors and leave the fire-stricken area as soon as possible. Ensure that the evacuation is quick and painless.
- Turn off dangerous machines and don't stop to get personal items.
- · Assemble at a central location. Ascertain that the assembly point is easily accessible to the employees.
- If one's clothing catches fire, one shouldn't rush about it. They should stop and descend on the ground and roll to smother the flames if their clothes catch fire.

8.2.3 Fire Extinguisher -

Fire extinguishers are portable devices used to put out small flames or minimise their damage until fire-fighters arrive. These are maintained on hand in locations such as fire stations, buildings, workplaces, public transit, and so on. The types and quantity of extinguishers that are legally necessary for a given region are determined by the applicable safety standards.

Types of fire extinguishers are:

There are five main types of fire extinguishers:

- 1. Water.
- 2. Powder.
- 3. Foam.
- 4. Carbon Dioxide (CO2).
- 5. Wet chemical.
- **1. Water:** Water fire extinguishers are one of the most common commercial and residential fire extinguishers on the market. They're meant to be used on class-A flames.



2. Powder: The L2 powder fire extinguisher is the most commonly recommended fire extinguisher in the Class D Specialist Powder category, and is designed to put out burning lithium metal fires.



3. Foam: Foam extinguishers are identified by a cream rectangle with the word "foam" printed on it. They're mostly water-based, but they also contain a foaming component that provides a quick knock-down and blanketing effect on flames. It suffocates the flames and seals the vapours, preventing re-ignition.



4. Carbon Dioxide (CO2): Class B and electrical fires are extinguished with carbon dioxide extinguishers, which suffocate the flames by removing oxygen from the air. They are particularly beneficial for workplaces and workshops where electrical fires may occur since, unlike conventional extinguishers, they do not leave any toxins behind and hence minimise equipment damage.



5. Wet Chemical: Wet chemical extinguishers are designed to put out fires that are classified as class F. They are successful because they can put out extremely high-temperature fires, such as those caused by cooking oils and fats.



Notes 🗒 ——		
Notes 🔳		

UNIT 8.3: First Aid

Unit Objectives 6



By the end of this unit, participants will be able to:

- 1. Explain how the administer appropriate first aid to victims in case of bleeding, burns, choking, electric shock, poisoning
- 2. Explain how to administer first aid to victims in case of a heart attack or cardiac arrest due to electric shock.

8.3.1 First Aid ———

First aid is the treatment or care given to someone who has sustained an injury or disease until more advanced care can be obtained or the person recovers.

The aim of first aid is to:

- · Preserve life
- · Prevent the worsening of a sickness or injury
- · If at all possible, relieve pain
- Encourage recovery
- · Keep the unconscious safe.

First aid can help to lessen the severity of an injury or disease, and in some situations, it can even save a person's life.

8.3.2 Need for First Aid at the Workplace —

- · In the workplace, first aid refers to providing immediate care and life support to persons who have been injured or become unwell at work.
- Many times, first aid can help to lessen the severity of an accident or disease.
- It can also help an injured or sick person relax. In life-or-death situations, prompt and appropriate first aid can make all the difference.

8.3.2 Need for First Aid at the Workplace

In the workplace, first aid refers to providing immediate care and life support to persons who have been injured or become unwell at work.

Many times, first aid can help to lessen the severity of an accident or disease.

It can also help an injured or sick person relax. In life-or-death situations, prompt and appropriate first aid can make all the difference.

8.3.3 Treating Minor Cuts and Scapes

Steps to keep cuts clean and prevent infectionsand scars:

- Wash Hands: Wash hands first with soap and water to avoid introducing bacteria into the cut and causing an infection. One should use the hand sanitiser if one is on the go.
- **Stop the bleeding:** Using a gauze pad or a clean towel, apply pressure to the wound. For a few minutes, keep the pressure on.
- Clean Wounds: Once the bleeding has stopped, clean the wound by rinsing it under cool running water or using a saline wound wash. Use soap and a moist washcloth to clean the area around the wound. Soap should not be used on the cut since it may irritate the skin. Also, avoid using hydrogen peroxide or iodine, as these may aggravate the wound.
- **Remove Dirt:** Remove any dirt or debris from the area. Pick out any dirt, gravel, glass, or other material in the cut with a pair of tweezers cleaned with alcohol.

8.3.4 Heart Atack

When the blood flow carrying oxygen to the heart is blocked, a heart attack occurs. The heart muscle runs out of oxygen and starts to die.

Symptoms of a heart attack can vary from person to person. They may be mild or severe. Women, older adults, and people with diabetes are more likely to have subtle or unusual symptoms.

Symptoms in adults may include:

- Changes in mental status, especially in older adults.
- Chest pain that feels like pressure, squeezing, or fullness. The pain is most often in the centre of the chest. It may also be felt in the jaw, shoulder, arms, back, and stomach. It can last for more than a few minutes or come and go.
- · Cold sweat.
- · Light-headedness.
- · Nausea (more common in women).
- · Indigestion.

- Vomiting.
- Numbness, aching or tingling in the arm (usually the left arm, but the right arm may be affected alone, or along with the left).
- Shortness of breath
- Weakness or fatigue, especially in older adults and in women.

First Aid for Heart Attack

If one thinks someone is experiencing a heart attack, they should:

- Have the person sit down, rest, and try to keep calm.
- Loosen any tight clothing.
- Ask if the person takes any chest pain medicine, such as nitro-glycerine for a known heart condition, and help them take it.
- If the pain does not go away promptly with rest or within 3 minutes of taking nitro-glycerine, call for emergency medical help.
- If the person is unconscious and unresponsive, call 911 or the local emergency number, then begin CPR.
- If an infant or child is unconscious and unresponsive, perform 1 minute of CPR, then call 911 or the local emergency number.

Notes 🗒 ——		
Notes 🔳		

UNIT 8.4: Waste Management

Unit Objectives S



By the end of this unit, participants will be able to:

- 1. Describe the concept of waste management and methods of disposing of hazardous waste.
- 2. List the common sources of pollutionand ways to minimize them.
- 3. Elaborate on electronic waste disposal procedures.

8.4.1. Waste Management and Methods of Waste Disposal –

The collection, disposal, monitoring, and processing of waste materials is known as waste management. These wastes affect living beings' health and the environment. For reducing their effects, they have to be managed properly. The waste is usually in solid, liquid or gaseous form.

The importance of waste management is:

Waste management is important because it decreases waste's impact on the environment, health, and other factors. It can also assist in the reuse or recycling of resources like paper, cans, and glass. The disposal of solid, liquid, gaseous, or dangerous substances is the example of waste management.

When it comes to trash management, there are numerous factors to consider, including waste disposal, recycling, waste avoidance and reduction, and garbage transportation. Treatment of solid and liquid wastes is part of the waste management process. It also provides a number of recycling options for goods that aren't classified as garbage during the process.

8.4.2 Methods of Waste Management

Non-biodegradable and toxic wastes, such as radioactive remains, can cause irreversible damage to the environment and human health if they are not properly disposed of. Waste disposal has long been a source of worry, with population increase and industrialisation being the primary causes. Here are a few garbage disposal options.

- 1. Landfills: The most common way of trash disposal today is to throw daily waste/garbage into landfills. This garbage disposal method relies on burying the material in the ground.
- 2. Recycling: Recycling is the process of transforming waste items into new products in order to reduce energy consumption and the use of fresh raw materials. Recycling reduces energy consumption, landfill volume, air and water pollution, greenhouse gas emissions, and the preservation of natural resources for future use.

- **3. Composting:** Composting is a simple and natural bio-degradation process that converts organic wastes, such as plant remnants, garden garbage, and kitchen waste, into nutrient-rich food for plants.
- **4. Incineration:** Incineration is the process of combusting garbage. The waste material is cooked to extremely high temperatures and turned into materials such as heat, gas, steam, and ash using this technology.

8.4.3 Recyclable, Non-Recyclable and Hazardous Waste

- 1. Recyclable Waste: The waste which can be reused or recycled further is known as recyclable waste.
- **2. Non-recyclable Waste:** The waste which cannot be reused or recycled is known as non-recyclable waste. Polythene bags are a great example of non-recyclable waste.
- **3. Hazardous Waste:** The waste which can create serious harm to the people and the environment is known as hazardous waste.

8.4.4 Sources of Pollution -

Pollution is defined as the harm caused by the presence of a material or substances in places where they would not normally be found or at levels greater than normal. Polluting substances might be in the form of a solid, a liquid, or a gas.

- **Point source of pollution:** Pollution from a point source enters a water body at a precise location and can usually be identified. Effluent discharges from sewage treatment plants and industrial sites, power plants, landfill sites, fish farms, and oil leakage via a pipeline from industrial sites are all potential point sources of contamination.
 - Point source pollution is often easy to prevent since it is feasible to identify where it originates, and once identified, individuals responsible for the pollution can take rapid corrective action or invest in longer-term treatment and control facilities.
- **Diffuse source of pollution:** As a result of land-use activities such as urban development, amenity, farming, and forestry, diffuse pollution occurs when pollutants are widely used and diffused over a large region. These activities could have occurred recently or in the past. It might be difficult to pinpoint specific sources of pollution and, as a result, take rapid action to prevent it because prevention often necessitates significant changes in land use and management methods.

Pollution Prevention

Pollution prevention entails acting at the source of pollutants to prevent or minimise their production. It saves natural resources, like water, by using materials and energy more efficiently.

Pollution prevention includes any practice that:

- Reduces the amount of any hazardous substance, pollutant, or contaminant entering any waste stream or otherwise released into the environment (including fugitive emissions) prior to recycling, treatment, or disposal;
- Reduces the hazards to public health and the environment associated with the release of such substances, pollutants, or contaminants (these practices are known as "source reduction");
- Improved efficiency in the use of raw materials, energy, water, or other resources, or Conservation is a method of safeguarding natural resources.
- Improvements in housekeeping, maintenance, training, or inventory management; equipment or technology adjustments; process or method modifications; product reformulation or redesign; raw material substitution; or improvements in housekeeping, maintenance, training, or inventory control.

8.4.5 Electronic Waste

Lead, cadmium, beryllium, mercury, and brominated flame retardants are found in every piece of electronic waste. When gadgets and devices are disposed of illegally, these hazardous compounds are more likely to contaminate the earth, pollute the air, and leak into water bodies.

When e-waste is dumped in a landfill, it tends to leach trace metals as water runs through it. The contaminated landfill water then reaches natural groundwater with elevated toxic levels, which can be dangerous if it reaches any drinking water bodies. Despite having an environmentally benign approach, recycling generally results in international shipment and dumping of the gadgets in pits.

Some eco-friendly ways of disposing of e-waste are:

- · Giving back the e-waste to the electronic companies and drop-off points
- · Following guidelines issued by the government
- · Selling or donating the outdated technology-based equipment
- · Giving e-waste to a certified e-waste recycler

Exercise

1. Name all five types of fire extinguishers.	
2. Explain PPE in brief.	
3. List the common workplace hazards.	
4. Fill in the blacks:	
i. A " sign" is a safety sign that prohibits behaviour that is likel	y to endanger one's health
or safety.	
ii entails acting at the source of pollutants to prevent or n	ninimise their production.
iii is the treatment or care given to someone who has sust	ained an injury or disease
until more advanced care can be obtained or the person recovers.	
iv. The threats caused by biological agents like viruses, bacteria, animal	s, plants, insects and also
humans, are known as	

v. The workplace has to be administered as per the rules of the ______.

– Notes 🛗 I	
– Notes 📋 –	
	_

